

Telecommunications and Internet converged Services and Protocols for Advanced Networking (TISPAN); Resource and Admission Control Sub-System (RACS); Rr interface based on the ANCP protocol

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Full standard:
<https://standards.iteh.ai/catalog/standards/sist/63e7435a-cc7e-4cd4-a695-ec0ee52d6d6e/etsi-tr-183-070-v3.1.1-2009-08>



Reference

DTR/TISPAN-03198-NGN-R3

Keywords

interface, network, system

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

http://portal.etsi.org/chaicor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2009.
All rights reserved.

DECTTM, **PLUGTESTS**TM, **UMTS**TM, **TIPHON**TM, the TIPHON logo and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.

3GPPTM is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

LTETM is a Trade Mark of ETSI currently being registered

for the benefit of its Members and of the 3GPP Organizational Partners.

GSM[®] and the GSM logo are Trade Marks registered and owned by the GSM Association.

Contents

Intellectual Property Rights	4
Foreword.....	4
1 Scope	5
2 References	5
2.1 Normative references	5
2.2 Informative references.....	5
3 Abbreviations	5
4 Overview	6
5 Scenarios of ANCP for the Rr Interface.....	7
5.1 Compound Protocol Scenario of ANCP for the Rr Interface	7
6 Procedure descriptions	8
6.1 General	8
6.2 Procedures on the Rr interface	8
6.2.1 Provisioning of delegated bandwidth.....	8
6.2.2 Increase of delegated bandwidth.....	9
6.2.3 Decrease of delegated bandwidth	10
6.2.4 Query of delegated bandwidth	11
7 ANCP application	12
8 General Conclusion	12
History	13

iTeh STANDARD PREVIEW
 (standards.iteh.ai)
 Full standard:
<https://standards.iteh.ai/catalog/standards/sist/63e7435a-cc7e-4cd4-a695-ec0ee52d6d8e/etsi-tr-183-070-v3.1.1>
 2009-08

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Report (TR) has been produced by ETSI Technical Committee Telecommunications and Internet converged Services and Protocols for Advanced Networking (TISPAN).

iTeh STANDARD PREVIEW
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/63e7435a-cc7e-4cd4-a695-ec0ee52d6d6e/etsi-tr-183-070-v3.1.1-2009-08>

1 Scope

The present document provides a report on the study of the applicability of the ANCP protocol to the Rr interface between Generic Resource Admission Control Function (x-RACF) instances.

Whenever it is possible the present document specifies the requirements for this protocol by reference to specifications produced by the IETF within the scope of ANCP. Where this is not possible, extensions to ANCP are defined within the present document.

2 References

References are either specific (identified by date of publication and/or edition number or version number) or non-specific.

- For a specific reference, subsequent revisions do not apply.
- Non-specific reference may be made only to a complete document or a part thereof and only in the following cases:
 - if it is accepted that it will be possible to use all future changes of the referenced document for the purposes of the referring document;
 - for informative references.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication ETSI cannot guarantee their long term validity.

2.1 Normative references

The following referenced documents are indispensable for the application of the present document. For dated references, only the edition cited applies. For non-specific references, the latest edition of the referenced document (including any amendments) applies.

Not applicable.

2.2 Informative references

- [i.1] ETSI ES 282 001: "Telecommunications and Internet converged Services and Protocols for Advanced Networking (TISPAN); NGN Functional Architecture".
- [i.2] ETSI ES 282 003: "Telecommunications and Internet converged Services and Protocols for Advanced Networking (TISPAN); Resource and Admission Control Sub-System (RACS): Functional Architecture".

3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

AN	Access Node
ANCP	Access Node Control Protocol
IETF	Internet Engineering Task Force
NAS	Network Access Server
RACS	Resource and Admission Control Sub-System

4 Overview

The present document describes the ANCP protocol for the RACS Rr interface. The Rr interface is used for QoS resource reservation between x-RACF instances of RACS within a single administrative domain. The functional requirements and the stage 2 specifications of the Rr interface are contained in ES 282 001 [i.1] and ES 282 003 [i.2].

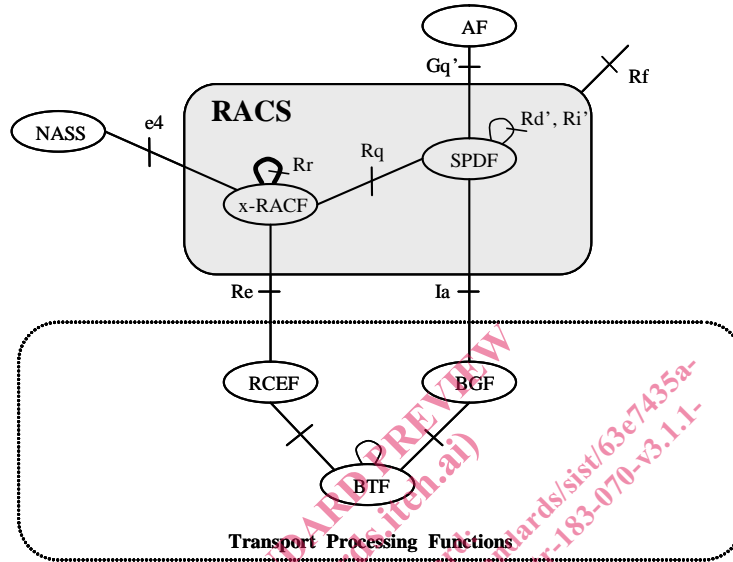


Figure 4.1: Rr interface

5 Scenarios of ANCP for the Rr Interface

5.1 Compound Protocol Scenario of ANCP for the Rr Interface

Figure 5.1 illustrates a scenario where the ANCP could be applicable for the Rr interface. In this scenario, there are three types of network entities, the standalone RACS, the IP edge (i.e. NAS in IETF) and the access node. The top-tier x-RACF is deployed on a standalone RACS device, while the lower-tier x-RACF is deployed on the access node. The RACS supports the Diameter protocol but not the ANCP protocol with the IP Edge. The access node supports the ANCP protocol but not the Diameter protocol with the IP Edge. Therefore, the top-tier x-RACF and the lower-tier x-RACF do not interact directly with each other using a common protocol. They always interact with each other indirectly via an intermediate network entity, i.e. the IP Edge, using both Diameter and ANCP protocols.

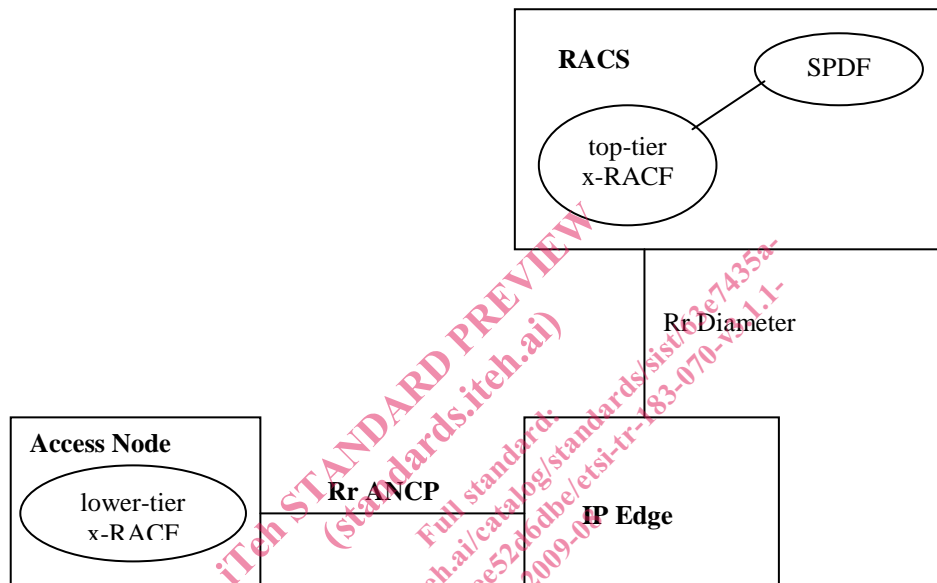


Figure 5.1: A Scenario of ANCP Applicable for the Rr Interface

In this scenario, the top-tier x-RACF manages one part of the bandwidth of the access segment and performs admission control for unicast flows, while the lower-tier x-RACF manages the other part of the bandwidth of the access segment and performs admission control for multicast flows.

When the bandwidth managed by the top-tier x-RACF of the access segment is sufficient for a new unicast request, the top-tier x-RACF performs the admission control without interaction with the low-tier x-RACF. When the bandwidth managed by the top-tier x-RACF of the access segment is insufficient for a new unicast request, the top-tier x-RACF will send a request to the low-tier x-RACF to ask for more bandwidth for unicast flows:

- If the low-tier x-RACF has sufficient free bandwidth, it will grant the requested amount of bandwidth to be managed by the top-tier x-RACF. After this interaction, the part of the bandwidth managed by the lower-tier x-RACF has been decreased and meanwhile the other part of the bandwidth managed by the top-tier x-RACF has been increased. Then the top-tier x-RACF can have sufficient bandwidth to meet the unicast request.
- If the low-tier x-RACF has insufficient free bandwidth, it will refuse to grant the amount of bandwidth to be managed by the top-tier x-RACF. Then the top-tier x-RACF will refuse the unicast request because of insufficient bandwidth.

When the bandwidth managed by the lower-tier x-RACF of the access segment is sufficient for a new multicast request, the lower-tier x-RACF performs the admission control without interaction with the top-tier x-RACF. When the bandwidth managed by the lower-tier x-RACF of the access segment is insufficient for a new multicast request, the lower-tier x-RACF will send a request to the top-tier x-RACF to ask for more bandwidth for multicast flows:

- If the top-tier x-RACF has sufficient free bandwidth, it will grant the requested amount of bandwidth to be managed by the lower-tier x-RACF. After this interaction, the part of the bandwidth managed by the top-tier x-RACF has been decreased and meanwhile the other part of the bandwidth managed by the lower-tier x-RACF has been increased. Then the lower-tier x-RACF can have sufficient bandwidth to meet the multicast request.
- If the top-tier x-RACF has insufficient free bandwidth, it will refuse to grant the amount of bandwidth to be managed by the lower-tier x-RACF. Then the lower-tier x-RACF will refuse the multicast request because of insufficient bandwidth.

6 Procedure descriptions

6.1 General

In the present document, the RACS acts as the delegating x-RACF as well as the SPDF and is responsible for the admission control for unicast services, while the AN acts as the delegated x-RACF and is responsible for the admission control for multicast services. IP Edge acts as an intermediate entity between the delegating x-RACF and the delegated x-RACF. The ANCP protocol operates between the IP Edge and AN, and supports the delegated model of the Rr reference point.

6.2 Procedures on the Rr interface

6.2.1 Provisioning of delegated bandwidth

The procedure of provisioning of delegated bandwidth is illustrated in figure 6.1. This procedure is triggered during the user's network attachment phase. The RACS also reuse this procedure to synchronize the delegated bandwidth with the AN.

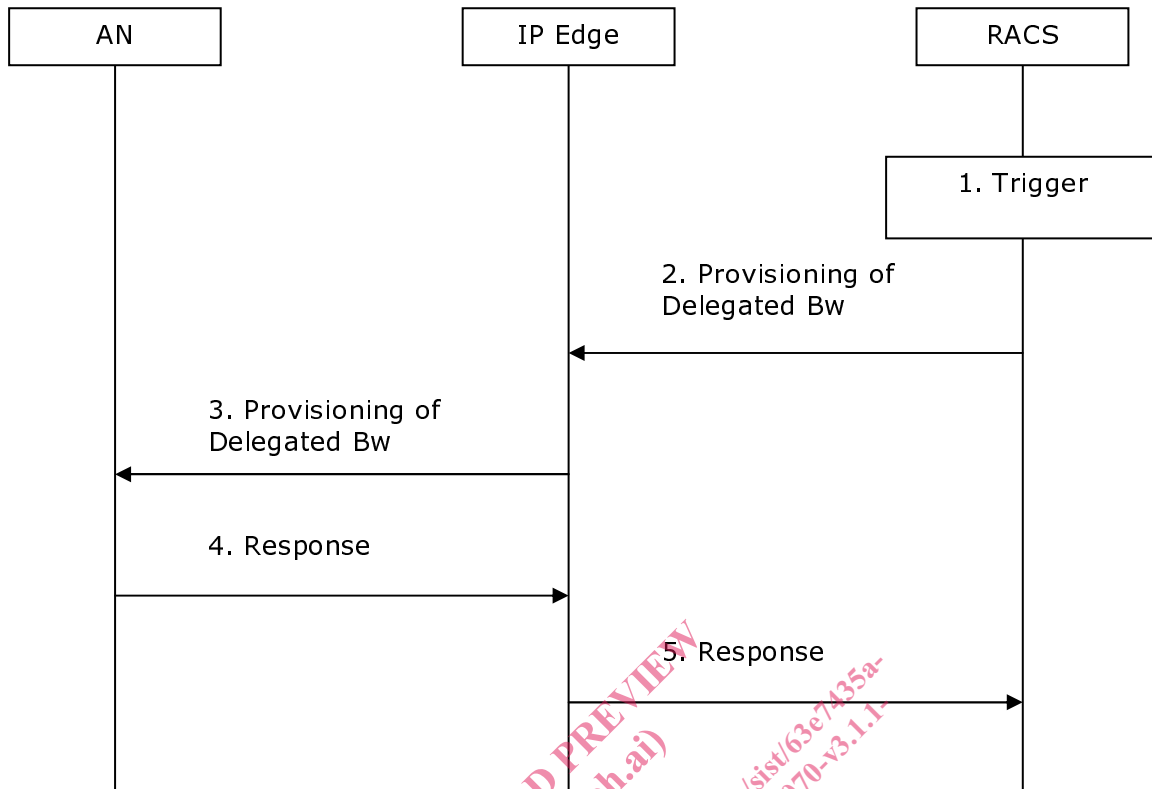


Figure 6.1: Provisioning of delegated bandwidth

- 1) During the network attachment phase, the CLF notifies the RACS of the event that the user is online. The RACS obtains or decides the initial delegated bandwidth for the user's multicast services based on for example the local configuration on the RACS.
- 2) The RACS sends to IP Edge a message containing the provisioning data of the delegated bandwidth for the user's multicast services.
- 3) The IP Edge sends to AN an ANCP message containing the provisioning data of the delegated bandwidth for the user's multicast services.
- 4) The AN saves the delegated bandwidth for the user's multicast services for future use and sends an ANCP response to the IP Edge.
- 5) The IP Edge sends a response to the RACS.

6.2.2 Increase of delegated bandwidth

The procedure of increase of delegated bandwidth is illustrated in figure 6.2. This procedure is triggered by the AN when there is not sufficient delegated bandwidth for multicast services.