

ETSI EN 302 217-1 V1.3.1 (2010-01)

European Standard (Telecommunications series)

Fixed Radio Systems; Characteristics and requirements for point-to-point equipment and antennas; Part 1: Overview and system-independent common characteristics

iTeh STANDARD PREVIEW
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/436ab170-028e-4096-b8a7-b1731eacb7c7/etsi-en-302-217-1-v1.3.1-2010-01>



Reference

 REN/ATTM-04009

Keywords

 antenna, DFRS, digital, DRRS, FWA,
 point-to-point, radio, transmission
ETSI

 650 Route des Lucioles
 F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

 Siret N° 348 623 562 00017 - NAF 742 C
 Association à but non lucratif enregistrée à la
 Sous-Préfecture de Grasse (06) N° 7803/88
Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

http://portal.etsi.org/chaicor/ETSI_support.asp
Copyright Notification

No part may be reproduced except as authorized by written permission.
 The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2010.
 All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™**, **TIPHON™**, the TIPHON logo and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.

3GPP™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

LTE™ is a Trade Mark of ETSI currently being registered

for the benefit of its Members and of the 3GPP Organizational Partners.

GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Contents

Intellectual Property Rights	4
Foreword.....	4
Introduction	5
1 Scope	12
2 References	12
2.1 Normative references	13
2.2 Informative references	15
3 Definitions, symbols and abbreviations	18
3.1 Definitions	18
3.2 Symbols	22
3.3 Abbreviations	22
4 General characteristics	25
4.1 Performance and availability requirements	25
4.2 Environmental profiles	25
4.2.1 Environmental profile declared under the R&TTE Directive	25
4.2.2 ETSI environmental profiles	26
4.2.2.1 Equipment within weather-protected locations (indoor locations)	26
4.2.2.2 Equipment for not-weather-protected locations (outdoor locations)	26
4.2.3 Test environment profiles	26
4.3 Power supply	26
4.3.1 Power supply profile declared under the R&TTE Directive	27
4.3.2 ETSI power supply profile	27
4.4 System block diagram	27
5 Baseband interfaces and parameters	28
5.1 Plesiochronous interfaces	28
5.2 ISDN interfaces	28
5.3 Synchronous digital hierarchy interfaces	28
5.4 Other baseband data interfaces	28
Annex A (informative): Miscellaneous characteristics.....	29
A.1 Telecommunications Management Network (TMN) interface	29
A.2 Mechanical characteristics	29
Annex B (informative): Notification of interfaces under article 4.1 of the R&TTE Directive	30
B.1 Applicability of TCAM-RIG format of radio interface specifications to Fixed Services	30
B.2 Proposed list of radio interface specifications for Fixed Services.....	31
History	32

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (Telecommunications series) has been produced by ETSI Technical Committee Access, Terminals, Transmission and Multiplexing (ATTM).

The present document is part 1 of a multi-part deliverable covering the Fixed Radio Systems; Characteristics and requirements for point-to-point equipment and antennas, as identified below:

Part 1: "Overview and system-independent common characteristics";

Part 2-1: "System-dependent requirements for digital systems operating in frequency bands where frequency co-ordination is applied";

Part 2-2: "Digital systems operating in frequency bands where frequency co-ordination is applied; Harmonized EN covering the essential requirements of Article 3.2 of the R&TTE Directive";

Part 3: "Equipment operating in frequency bands where both frequency coordinated or uncoordinated deployment might be applied; Harmonized EN covering the essential requirements of article 3.2 of the R&TTE";

Part 4-1: "System-dependent requirements for antennas";

Part 4-2: "Antennas; Harmonized EN covering the essential requirements of Article 3.2 of R&TTE Directive".

National transposition dates

Date of adoption of this EN:	18 January 2010
Date of latest announcement of this EN (doa):	30 April 2010
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	31 October 2010
Date of withdrawal of any conflicting National Standard (dow):	31 October 2010

Introduction

Generality and historical background

Digital Fixed Radio Systems (DFRS), used in European countries, had been historically specified in a relatively large number of specific European Norms produced by ETSI.

Those previous documents, already superseded by first version of this EN 302 217 series, contained both essential requirements and other requirements that, even if not considered essential under the Directive 1999/5/EC [1] of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity (hereafter mentioned as the R&TTE Directive) [1], may be applicable.

Standards for point-to-point systems, including antennas, cover a very large range of traffic capacities, channel separations, modulation formats and applications over a very wide range of frequency bands that are summarized in table 1.

Table 1: Digital Fixed Radio Systems (DFRS) parameters

Parameter	Range
Frequency bands	from 1 GHz to 86 GHz
Traffic capacities	from 9,6 kbit/s to 622 Mbit/s and to Gigabit/s and above in the highest bands
Channel separations	from 25 kHz to 112 MHz and to Gigahertz and above in the highest bands
Modulation formats	from 2 to 512 states (amplitude and/or phase and/or frequency modulated states)
Typical applications	<p>POINT-TO-POINT (P-P) CONNECTIONS: rural and urban low/medium/high capacity links for mobile infrastructure, transport/trunk (long haul), FWA/BWA/MWA backhaul, access, governmental (non-military) links, private fixed networks, SAP/SAB P to P audio and video links</p> <p>STAND ALONE ANTENNAS: for all of the above applications when integral antennas are not employed</p>

The regulatory framework for placing radio systems on the market, established by the R&TTE Directive [1] also requires the availability of Harmonized ENs covering the essential requirements under article 3.2 of the R&TTE Directive [1]. EN 302 217 series meet this demand by providing a rational subdivision of requirements into general, system dependent "not essential" and "essential" requirements from the perspective of the R&TTE Directive [1].

Part 1 includes system-independent common characteristics; these requirements are not essential under article 3.2 of the R&TTE Directive [1].

EN 302 217-2-2 [i.34], EN 302 217-3 [i.35] and EN 302 217-4-2 [i.37] relevant to essential requirements under article 3.2 of the R&TTE Directive [1]. Additional system can be added for new available FS bands and for completing market available options.

In the present document, equipment are grouped into families of either similar frequency bands or applications. Five families are identified for frequency bands where frequency co-ordination is applied, corresponding, in both EN 302 217-2-1 [i.33] and EN 302 217-2-2 [i.34], to annexes referenced from A to E and one family associated with applications of packet data and combination of other signals mapped into proprietary transport modules, detailed in annex F.

- A frequency bands from 1,4 GHz to 2,7 GHz;
- B frequency bands from 3 GHz to 11 GHz (channel separation up to around 30 MHz);
- C frequency bands from 3 GHz to 11 GHz (channel separation 40 MHz);
- D frequency bands 13 GHz, 15 GHz and 18 GHz;
- E frequency bands from 23 GHz to 55 GHz;
- F transmission of Packet Data and combination of other signals.

In the same way EN 302 217-3 [i.35] three families are identified for frequency bands where either co-ordinated or uncoordinated deployment might be applied (see note), corresponding to annexes referenced from UA to UC.

- UA frequency band from 57 GHz to 59 GHz;
- UB frequency band from 64 GHz to 66 GHz;
- UBa frequency band from 57 GHz to 66 GHz (alternative, in overlapping bands, to UA and UB);
- UC frequency bands from 71 GHz to 76 GHz and 81 GHz to 86 GHz.

NOTE: In these bands, CEPT administrations might have different views on the licensing and deployment requirements, ranging among uncoordinated, user self coordination (sometimes called "light licensing") or conventional link-by-link coordination. Therefore, from R&TTE Directive [1] point of view, the minimum of characteristics are considered among essential requirements.

Cross references to previously relevant ENs and TSs

The EN 302 217 series replaced and superseded the standards that are listed in table 2; they have been labelled as "historical" in the ETSI data base. Table 2 provides also an overview of the correspondence between equipment considered in those ENs and part/annexes in the present document.

Requirements have been rationalized and redistributed in the present document according to a logic subdivision dictated by the coming into force of the R&TTE Directive [1]:

- requirements considered essential under article 3.2 of the R&TTE Directive [1] have been placed in the relevant harmonized ENs EN 302 217-2-2 [i.34], EN 302 217-3 [i.35] and EN 302 217-4-2 [i.37];
- other requirements that, even if not considered essential under the R&TTE Directive [1], may be applicable, on a voluntary basis, as a common basis for maintaining performance and operability of DFRS in typical deployment, have been placed in the present document or in other relevant parts EN 302 217-2-1 [i.33] and EN 302 217-4-1 [i.36].

Table 2: List of ETSI standards that has been replaced and superseded by the EN 302 217 series

Equipment and antenna standards (see note 3)					
ETSI Reference number	Version	Title	Fixed Service frequency bands of operation (see note 1)	Channel separation (MHz)	Relevant parts and annexes of EN 302 217 series (see note 2)
EN 300 197 [i.4]	V1.6.x	Parameters for radio systems for the transmission of digital signals operating at 32 GHz and 38 GHz	32 GHz and 38 GHz	3,5 to 56	Annex E EN 302 217-2-1 [i.33] and EN 302 217-2-2 [i.34]
EN 300 198 [i.5]	V1.5.x	Parameters for radio systems for the transmission of digital signals operating at 23 GHz	23 GHz	3,5 to 56	Annex E EN 302 217-2-1 [i.33] and EN 302 217-2-2 [i.34]
EN 300 234 [i.6]	V1.3.x	High capacity digital radio systems carrying 1 x STM-1 signals and operating in frequency bands with about 30 MHz channel spacing and alternated arrangements	any from 4 GHz to 15 GHz	28 to 30	Annexes B and D EN 302 217-2-1 [i.33] and EN 302 217-2-2 [i.34]
EN 300 407 [i.7]	V1.3.x	Parameters for digital radio systems for the transmission of digital signals operating at 55 GHz	55 GHz	3,5 to 56	Annex E EN 302 217-2-1 [i.33] and EN 302 217-2-2 [i.34]
EN 300 408 [i.8]	V1.3.x	Parameters for digital radio systems for the transmission of digital signals and analogue video signals operating at around 58 GHz, which do not require co-ordinated frequency planning	58 GHz	50 and 100	Annex UA EN 302 217-3 [i.35] (V1.2.x)

Equipment and antenna standards (see note 3)					
ETSI Reference number	Version	Title	Fixed Service frequency bands of operation (see note 1)	Channel separation (MHz)	Relevant parts and annexes of EN 302 217 series (see note 2)
EN 300 430 [i.10]	V1.4.x	Parameters for radio systems for the transmission of STM-1 digital signals operating in the 18 GHz frequency band with channel spacing of 55 MHz and 27,5 MHz	18 GHz	27,5 and 55	Annex D EN 302 217-2-1 [i.33] and EN 302 217-2-2 [i.34]
EN 300 431 [i.11]	V1.4.x	Parameters for radio system for the transmission of digital signals operating in the frequency range 24,5 GHz to 29,5 GHz	26 GHz and 28 GHz	3,5 to 56	Annex E EN 302 217-2-1 [i.33] and EN 302 217-2-2 [i.34]
EN 300 630 [i.12]	V1.3.x	Low capacity point-to-point digital radio systems in the 1,4 GHz frequency band	1,4 GHz	0,025 to 3,5	Annex A EN 302 217-2-1 [i.33] and EN 302 217-2-2 [i.34]
EN 300 631 [i.13]	V1.2.x	Antennas for point-to-point fixed radio systems in the 1 GHz to 3 GHz band	any from 1 GHz to 3 GHz	n.a.	EN 302 217-4-1 [i.36] and EN 302 217-4-2 [i.37]
EN 300 633 [i.14]	V1.3.x	Low and medium capacity point-to-point digital radio systems operating in the frequency range 2,1 GHz to 2,6 GHz	any from 2,1 GHz to 2,6 GHz	0,5 to 14	Annex A EN 302 217-2-1 [i.33] and EN 302 217-2-2 [i.34]
EN 300 639 [i.15]	V1.3.x	Sub STM-1 digital radio systems operating in the 13 GHz, 15 GHz and 18 GHz frequency bands with about 28 MHz co-polar and 14 MHz cross-polar channel spacing	13 GHz, 15 GHz and 18 GHz	14 and 28	Annex D EN 302 217-2-1 [i.33] and EN 302 217-2-2 [i.34]
EN 300 786 [i.17]	V1.3.x	Sub STM-1 digital radio systems in the 13 GHz, 15 GHz and 18 GHz frequency bands with about 14 MHz co-polar channel spacing	13 GHz, 15 GHz and 18 GHz	14	Annex D EN 302 217-2-1 [i.33] and EN 302 217-2-2 [i.34]
EN 300 833 [i.18]	V1.4.x	Antennas for point-to-point fixed radio systems operating in the frequency band 3 GHz to 60 GHz	any from 3 GHz to 60 GHz	n.a.	EN 302 217-4-1 [i.36] and EN 302 217-4-2 [i.37]
EN 301 127 [i.19]	V1.3.x	High capacity digital radio systems carrying SDH signals (2 x STM-1) in frequency bands with about 30 MHz channel spacing and using Co-Channel Dual-Polarized (CCDP) operation	any from 4 GHz to 15 GHz	28 to 30	Annexes B and D EN 302 217-2-1 [i.33] and EN 302 217-2-2 [i.34]
EN 301 128 [i.20]	V1.2.x	PDH low and medium capacity digital radio systems operating in the 13 GHz, 15 GHz and 18 GHz frequency bands	13 GHz, 15 GHz and 18 GHz	1,75 to 28	Annex D EN 302 217-2-1 [i.33] and EN 302 217-2-2 [i.34]
EN 301 216 [i.22]	V1.2.x	PDH low and medium capacity and STM-0 digital radio systems operating in the frequency bands in the range 3 GHz to 11 GHz	any from 3 GHz to 11 GHz	1,75 to 30	Annex B EN 302 217-2-1 [i.33] and EN 302 217-2-2 [i.34]
EN 301 277 [i.23]	V1.2.x	High capacity digital radio systems transmitting STM-4 or 4 x STM-1 in a 40 MHz radio frequency channel using Co-Channel Dual Polarized (CCDP) operation	any from 4 GHz to 11 GHz	40	Annex C EN 302 217-2-1 [i.33] and EN 302 217-2-2 [i.34]
EN 301 387 [i.24]	V1.2.x	PDH low and medium capacity digital radio systems operating in the frequency band 48,5 GHz to 50,2 GHz	50 GHz	3,5 to 28	Annex E EN 302 217-2-1 [i.33] and EN 302 217-2-2 [i.34]
EN 301 461 [i.25]	V1.3.x	High capacity fixed radio systems carrying SDH signals (2 x STM-1) in frequency bands with 40 MHz channel spacing and using Co-Channel Dual-Polarized (CCDP) operation	any from 4 GHz to 11 GHz	40	Annex C EN 302 217-2-1 [i.33] and EN 302 217-2-2 [i.34]

Equipment and antenna standards (see note 3)					
ETSI Reference number	Version	Title	Fixed Service frequency bands of operation (see note 1)	Channel separation (MHz)	Relevant parts and annexes of EN 302 217 series (see note 2)
EN 301 669 [i.28]	V1.2.x	High capacity digital radio systems carrying STM-4 in two 40 MHz channels or 2 x STM-1 in a 40 MHz channel with alternate channel arrangement	any from 4 GHz to 11 GHz	40	Annex C EN 302 217-2-1 [i.33] and EN 302 217-2-2 [i.34]
EN 301 785 [i.29]	V1.2.x	Parameters for packet data radio systems for transmission of digital signals operating in the frequency range 7, 8, 13, 15, 18, 23, 26, 28, 32, 38, 52 to 55 GHz	7 GHz to 55 GHz	1,75 to 56	Annex F EN 302 217-2-1 [i.33] and EN 302 217-2-2 [i.34]
EN 301 786 [i.30]	V1.2.x	Parameters for digital radio systems for the transmission of digital signals operating at 52 GHz	52 GHz	3,5 to 56	Annex E EN 302 217-2-1 [i.33] and EN 302 217-2-2 [i.34]
EN 301 787 [i.31]	V1.1.x	Parameters for radio systems for the transmission of Sub-STM-0 digital signals operating in the 18 GHz frequency band	18 GHz	3,5	Annex D EN 302 217-2-1 [i.33] and EN 302 217-2-2 [i.34]
EN 302 062 [i.32]	V.1.1.x	High capacity digital radio systems carrying 2 x STM-1, 4 x STM-1 or STM-4 signals in frequency bands with 55/56 MHz channel spacing	15 GHz, 18 GHz, 23 GHz, 26 GHz, 32 GHz and 38 GHz	55/56 and 110/112	Annexes D and E EN 302 217-2-1 [i.33] and EN 302 217-2-2 [i.34]
TS 102 329 [i.40] (withdrawn in 2009)	V1.1.x	Radio equipment and antennas for use in Point-to-Point High Density applications in the Fixed Services (HDFS) frequency band 64 GHz to 66 GHz	65 GHz	Flexible or N*30 MHz (N=1÷33/66) (FDD/TDD)	Annex UB EN 302 217-3 [i.35] (V1.2.x)
TS 102 524 [i.41] (see note 4)	V1.1.x	Radio equipment and antennas for use in Point-to-Point Millimeter Wave applications in the Fixed Services (mmwFS) frequency bands 71 GHz to 76 GHz and 81 GHz to 86 GHz	71÷76 GHz 81÷86 GHz	N*250 MHz (N=1÷20) (FDD/TDD)	Annex UC EN 302 217-3 [i.35] (V1.2.x)
NOTE 1: The frequency band identification is taken from the approximate centre frequency as commonly used in Fixed Service ITU-R Recommendations; it also includes national frequency bands that may slightly differ from each other but are commonly referred to by the same term.					
NOTE 2: The reference of the annex where system specific requirements and characteristics are introduced is the same for EN 302 217-2-1 [i.33] and EN 302 217-2-2 [i.34], respectively.					
NOTE 3: All references in this table are found in the clause 2.2.					
NOTE 4: This TS might be withdrawn in due time.					

Table 3 summarizes the relevant cross-reference between radio frequency and other requirements of equipment in various Fixed Service frequency bands and the relevant sub-parts and annexes of this EN 302 217 series.

Table 3: Cross reference of equipment requirements, parts, sub-parts and annexes

EN 302 217																										
System independent common characteristics	Part 1																									
Antenna characteristics	Parts 4-1 and 4-2																									
Sub-systems in relevant annexes and EN parts ⇒	Sub-systems in annexes A of parts 2-1 and 2-2		Sub-systems in annexes B and C of parts 2-1 and 2-2							Sub-systems in annexes D of parts 2-1 and 2-2			Sub-systems in annexes E of parts 2-1 and 2-2							Annex UA of Part 3	Annex UB of Part 3	Annex UBa of Part 3 (note)	Annex UC of Part 3			
Frequency band (GHz)⇒	1,4	2,1/2,6	3,5/4	U4	L6	U6	7/8	10,5	11	13	15	18	23	26/28	31	32	38	50	52	55	57-59	64-66	57-66 (note)	71-76	81-86	
System capacity (payloads) ↓																										
PDH systems	A.1	A.2	B.1 B.4 B.5	–	B.1 B.4 B.5	B.1	B.1 B.4 B.5	B.1 B.4 B.5	–	D.1 D.9 D.10	D.1 D.9 D.10	D.1 D.9 D.10	E.1	E.2	E.3	E.3	E.3	E.5	E.6	E.7	Any					
STM-0 NxSTM-0	–	–	B.1 B.4 B.5	–	B.1 B.4 B.5	B.1	B.1 B.4 B.5	B.1 B.4 B.5	–	D.3 D.4 D.9 D.10	D.3 D.4 D.9 D.10	D.3 D.4 D.9 D.10	E.1	E.2	E.3	E.3	E.3	–	E.6	E.7						
SubSTM-0	–	–	–	–	–	–	–	–	–	–	–	D.2	–	–	–	–	–	–	–	–						
STM-1 NxSTM-1 STM-4	–	–	B.2 B.3 B.6 C.1 C.2 C.3	B.2 B.3 B.6 C.1 C.2 C.3	B.2 B.3 B.6 C.1 C.2 C.3	B.2 B.3 B.6 C.1 C.2 C.3	B.2 B.3 B.6 C.1 C.2 C.3	B.2 B.3 B.6 C.1 C.2 C.3	–	D.5 D.6 D.8	D.5 D.6 D.7 D.8	D.5 D.6 D.7 D.8	E.1 E.4	E.2 E.4	E.3	E.3 E.4	E.3 E.4	–	E.6	E.7						
Packet data and mixed interfaces	Annexes F of parts 2-1 and 2-2																									

NOTE: Alternative, in overlapping bands, to annexes UA and UB

User's guide

With reference to the former standards listed in table 2, the EN 302 217 series provides the same set of characteristics and requirements, with the same values. However, this information is presented differently, spread across six parts corresponding to three categories.

The first category (the present document) corresponds to characteristics which are either common to the whole family of equipment or are provided in a comprehensive list, i.e. performance and availability, environmental profiles, power supply, system block diagram, TMN interface, mechanical characteristics and baseband interfaces and parameters. The symbols and abbreviations, which apply to the EN 302 217 series, are listed in the present document. The present document defines those requirements and characteristics set out in the other parts of this EN 302 217 series.

The second category (EN 302 217-2-1 [i.33] and EN 302 217-4-1 [i.36]) corresponds to characteristics and requirements, which are not relevant to article 3.2 of the R&TTE Directive [1]. Nevertheless, compliance to all or some of these requirements is mandatory in order to claim compliance with the relevant part of the EN 302 217 series. Requirements are either "main requirements" or "complementary requirements". Even though compliance to these parts is not mandatory for the R&TTE Directive [1] conformity, compliance may be claimed to all or some requirements of these parts.

EN 302 217-2-1 [i.33] and EN 302 217-4-1 [i.36] provide a description of the main and complementary requirements, for equipment operating in co-ordinated frequency bands and for antennas.

Main requirements are requirements that are also related to the "essential requirements" under article 3.2 of the R&TTE Directive [1] and are further detailed in EN 302 217-2-2 [i.34] and EN 302 217-4-2 [i.37] of this EN 302 217 series; for equipment operating in co-ordinated frequency bands (EN 302 217-2-2 [i.34]) and for antennas (EN 302 217-4-2 [i.37]), respectively.

Complementary requirements are requirements that are not related to essential requirements under article 3.2 of the R&TTE Directive [1]. Nevertheless they are considered, having been commonly agreed for proper system operation and deployment when specific deployment conditions or compatibility requirements are present. Compliance to all or some of these requirements is made on a voluntary basis.

The limiting values for main and complementary requirements that are not common to all of the equipment covered by one part, but specific to one frequency range, one hierarchy (PDH or SDH), one capacity, etc, are located in annexes which may be further divided into sub-annexes. A sub-annex, when created, is dedicated to one system, described by the association of the range of capacities, the range of frequencies and the range of channel separations.

The third category (EN 302 217-2-2 [i.34], EN 302 217-3 [i.35] and EN 302 217-4-2 [i.37]) corresponds to essential phenomena, with respect to article 3.2 of the R&TTE Directive [1] and are consequently harmonized standards. The requirements are provided in the same way as in EN 302 217-2-1 [i.33] and EN 302 217-4-1 [i.36]. The limiting values associated with the essential requirements which are not common to all of the equipment covered by one part, but specific to one frequency range, one hierarchy (PDH or SDH), one capacity, etc, are located in annexes which may be further divided into sub-annexes. Reference to each annex is the same for EN 302 217-2-1 [i.33] as in EN 302 217-2-2 [i.34]. An HS-RTT (requirements table) summarizes those requirements to be addressed in order to claim compliance.

To conclude, this EN 302 217 series shall be used as a decision tree, from the present document down to the relevant annexes/sub-annexes of parts EN 302 217-2-1 [i.33] and EN 302 217-2-2 [i.34]. At every level, a check of compliance shall be performed.

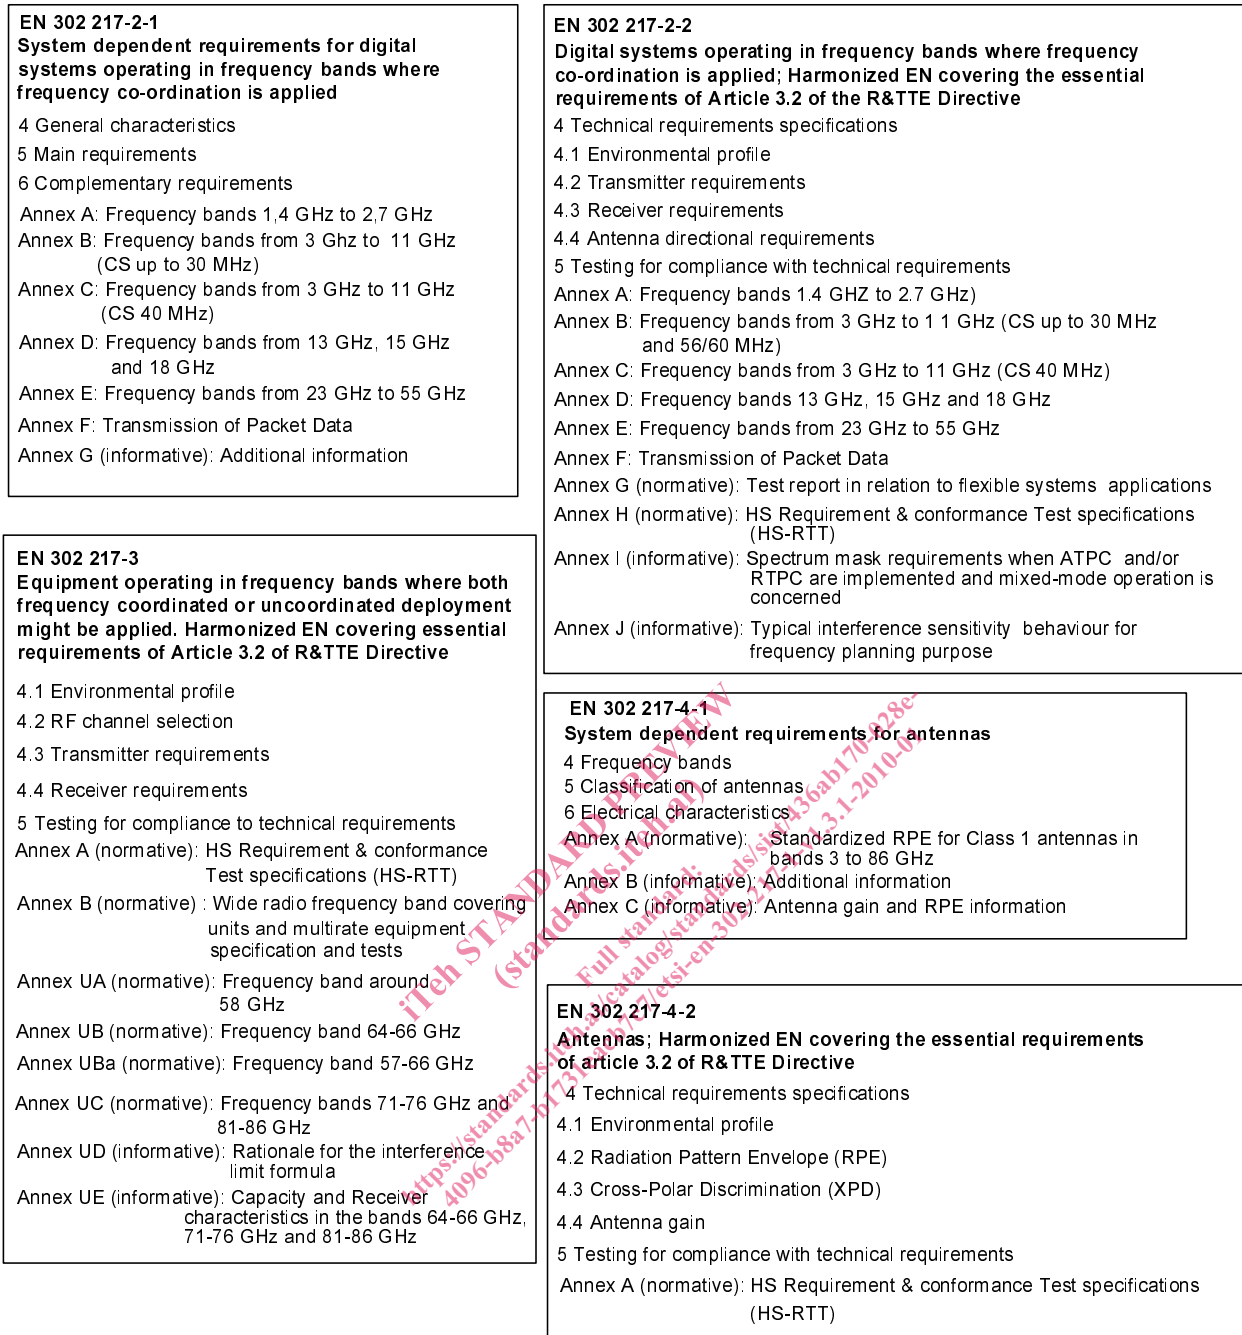


Figure 0: Structure of this EN 302 217 series