
**Long shank taps with nominal diameters
from M3 to M24 and 1/8 in to 1 in —
Reduced shank taps**

*Tarands à machine, à queue longue, de diamètre nominal M3 à M24 et
1/8 in à 1 in — Tarands à queue dégagée*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 2283:2000](https://standards.iteh.ai/catalog/standards/sist/9efb83bf-925a-4fde-958b-6aa4c030af4f/iso-2283-2000)

<https://standards.iteh.ai/catalog/standards/sist/9efb83bf-925a-4fde-958b-6aa4c030af4f/iso-2283-2000>



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 2283:2000

<https://standards.iteh.ai/catalog/standards/sist/9efb83bf-925a-4fde-958b-6aa4c030af4f/iso-2283-2000>

© ISO 2000

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 734 10 79
E-mail copyright@iso.ch
Web www.iso.ch

Printed in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

International Standard ISO 2283 was prepared by Technical Committee ISO/TC 29, *Small tools*, Subcommittee SC 4, *Screwing taps and dies*.

This second edition cancels and replaces the first edition (ISO 2283:1972), which has been technically revised.

Annex A of this International Standard is for information only.

ITC STANDARD PREVIEW
(standards.iteh.ai)
<https://standards.iteh.ai/catalog/standards/sist/9efb83bf-925a-4fde-958b-6aa4c030af4f/iso-2283-2000>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 2283:2000

<https://standards.iteh.ai/catalog/standards/sist/9efb83bf-925a-4fde-958b-6aa4c030af4f/iso-2283-2000>

Long shank taps with nominal diameters from M3 to M24 and 1/8 in to 1 in — Reduced shank taps

1 Scope

This International Standard specifies the dimensions for reduced shank taps with nominal diameters from M3 to M24 and 1/8 in to 1 in and thus complements ISO 8051 which concerns full-diameter shank taps.

It applies to long shank machine taps.

Technical specifications for taps covered by this International Standard (including marking) are given in ISO 8830.

This International Standard is applicable to taps intended for cutting the following threads:

a) ISO metric threads

- coarse pitch;
- fine pitch.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

b) ISO inch threads

- "Unified Coarse" series (UNC) and "Unified Fine" series (UNF).

[ISO 2283:2000](https://standards.iteh.ai/catalog/standards/sist/9efb83bf-925a-4fde-958b-6aa4c050af41/iso-2283-2000)

<https://standards.iteh.ai/catalog/standards/sist/9efb83bf-925a-4fde-958b-6aa4c050af41/iso-2283-2000>

The following non-recommended inch threads

- "British Standard Whitworth" (BSW) and "British Standard Fine" (BSF);
- "British Association" (BA)

are given in Annex A.

2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this International Standard. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO 529:1993, *Short machine taps and hand taps*.

ISO 8051:1999, *Long shank taps with nominal diameters from M3 to M10 — Full-diameter shank taps with recess*.

ISO 8830:1991, *High-speed steel machine taps with ground threads — Technical specifications*.

3 Dimensions


The dimensions are given in Figure 1 and Table 1 for ISO metric threads and in Table 2 for ISO inch threads.

The thread lengths of these taps are in accordance with those given in ISO 529.

Shank lengths ($L - l$) are increased by 50 % with respect to those given in ISO 529; total lengths therefore vary accordingly.

Where taps with diameters larger than those covered by this International Standard are required, the threaded length shall be that given for the corresponding nominal diameter in ISO 529 and the length of shank ($L - l$) shall be increased by 50 %.

NOTE For taps with nominal diameter from M3 to M10, a recess, optional at the manufacturer's discretion, with dimensions equal to the dimensions of d_2 from Table 1 of ISO 8051:1999 may be provided.

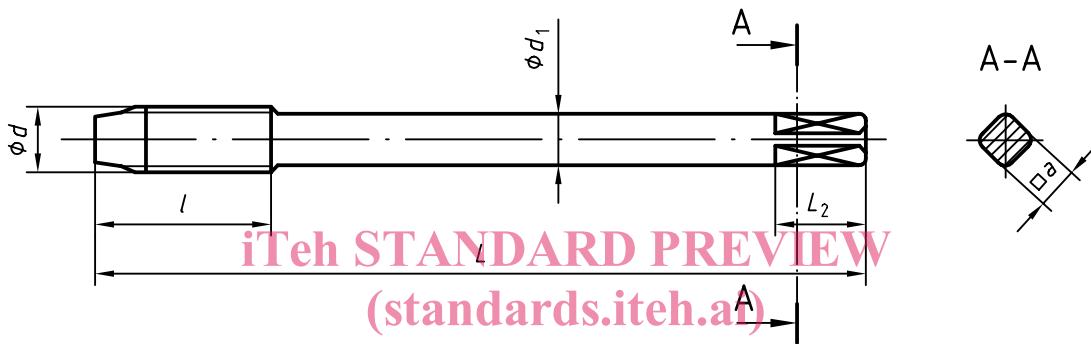

ISO 2283:2000
Figure 1
<https://standards.iteh.ai/catalog/standards/sist/9efb83bf-925a-4fde-958b-6aa4c030af4f/iso-2283-2000>

4 Marking

Marking shall be in accordance with ISO 8830.

Table 1 — Taps for ISO metric threads

Dimensions in millimetres

Designation		<i>d</i> nom.	Pitch		<i>d</i> ₁ h9 ^a	<i>l</i> max.	<i>L</i> h16	Square	
Coarse pitches	Fine pitches		coarse	fine				<i>a</i> h11 ^b	<i>l</i> ₂ ± 0,8
M3	M3 × 0,35	3	0,5	0,35	2,24	11	66	1,8	4
M3,5	M3,5 × 0,35	3,5	0,6		2,5	13	68	2	
M4	M4 × 0,5	4	0,7	0,5	3,15		16	73	2,5
M4,5	M4,5 × 0,5	4,5	0,75		3,55	2,8			
M5	M5 × 0,5	5	0,8		4	16	79	3,15	6
—	M5,5 × 0,5	5,5	—	17		84			
M6	M6 × 0,75	6	1	0,75	4,5	19	89	3,55	7
M7	M7 × 0,75	7			5,6			4,5	
M8	M8 × 1	8	1,25	1	6,3	22	97	5	8
M9	M9 × 1	9			7,1			5,6	
M10	M10 × 1	10	1,5	1,25	8	24	108	6,3	9
	M10 × 1,25								
M11	—	11	—	—	—	25	115	—	—
M12	M12 × 1,25	12	1,75	1,25	9	29	119	7,1	10
	M12 × 1,5								
M14	M14 × 1,25	14	2	1,25	11,2	30	127	9	12
	M14 × 1,5								
—	M15 × 1,5	15	—	—	—	—	—	—	—
M16	M16 × 1,5	16	2	1,5	12,5	32	137	10	13
—	M17 × 1,5	17	—						
M18	M18 × 1,5	18	2	2	14	37	149	11,2	14
	M18 × 2								
M20	M20 × 1,5	20	2,5	1,5	16	38	158	12,5	16
	M20 × 2								
M22	M22 × 1,5	22	2	1,5	16	38	158	12,5	16
	M22 × 2								
M24	M24 × 1,5	24	3	1,5	18	45	172	14	18
	M24 × 2								

^a In accordance with ISO 237^[1], tolerance h9 applies to precision shanks; for non-precision shanks, the tolerance is h11.

^b In accordance with ISO 237^[1], the tolerance is enlarged to h12 when including errors of form of the square and of its position in relation to the shank.

Table 2 — Taps for ISO Inch threads

Dimensions in millimetres

Designation		d nom.	Approximate pitch		d ₁ h9 ^a	l max.	L h16	Square	
"Unified coarse" (UNC)	"Unified Fine" (UNF)		UNC	UNF				a h11 ^b	l ₂ ± 0,8
No. 5-40-UNC	No. 5-44-UNF	3,175	0,635	0,577	2,24	11	66	1,80	4
No. 6-32-UNC	No. 6-40-UNF	3,505	0,794	0,635	2,50	13	68	2,00	
No. 8-32-UNC	No. 8-36-UNF	4,166		0,706	3,15		73	2,50	5
No. 10-24-UNC	No. 10-32-UNF	4,826	1,058	0,794	3,55	16	79	2,8	5
No. 12-24-UNC	No. 12-28-UNF	5,486		0,907	4,00	17	84	3,15	6
1/4-20-UNC	1/4-28-UNF	6,350	1,270	4,50	19	89	3,55		
5/16-18-UNC	5/16-24-UNF	7,938	1,411	1,058	6,30	22	97	5,00	8
3/8-16-UNC	3/8-24-UNF	9,525	1,588		7,10	24	108	5,60	8
7/16-14-UNC	7/16-20-UNF	11,112	1,814	1,270	8,00	25	115	6,30	9
1/2-13-UNC	1/2-20-UNF	12,700	1,954		9,00	29	119	7,10	10
9/16-12-UNC	9/16-18-UNF	14,288	2,117	1,411	11,20	30	127	9,00	12
5/8-11-UNC	5/8-18-UNF	15,875	2,309		12,50	32	137	10,00	13
3/4-10-UNC	3/4-16-UNF	19,050	2,540	1,588	14	37	149	11,20	14
7/8-9-UNC	7/8-14-UNF	22,225	2,822	1,814	16	38	158	12,50	16
1-8-UNC	1-12-UNF	25,400	3,175	2,117	18	45	172	14	18

^a In accordance with ISO 237^[1], tolerance h9 applies to precision shanks; for non-precision shanks, the tolerance is h11.

^b In accordance with ISO 237^[1], the tolerance is enlarged to h12 when including errors of form of the square and of its position in relation to the shank.

Annex A (informative)

Non-recommended threads

A.1 “British Standard Whitworth” (BSW) and “British Standard Fine” (BSF)

Table A.1

Dimensions in millimetres

Designation		d nom.	Approximate pitch		d_1 h9 ^a	l max.	L h16	Square		
BSW	BSF		BSW	BSF				a h11 ^b	l_2 nom.	tol.
1/8-40-BSW	—	3,175	0,635	—	2,24	11	66	1,8	4	± 0,8
3/16-24-BSW	3/16-32-BSF	4,762	1,058	0,794	3,55	16	79	2,8	5	
—	7/32-28-BSF	5,556	—	0,907	4	17	84	3,15	6	
1/4-20-BSW	1/4-26-BSF	6,35	1,27	—	4,5	19	89	3,55		
—	9/32-26-BSF	7,144	—	0,977	5,6			4,5	7	
5/16-18-BSW	5/16-22-BSF	7,938	1,411	1,154	6,3	22	97	5	8	
3/8-16-BSW	3/8-20-BSF	9,525	1,588	1,27	7,1	24	108	5,6		
7/16-14-BSW	7/16-18-BSF	11,112	1,814	1,411	8	25	115	6,3	9	
1/2-12-BSW	1/2-16-BSF	12,7	2,117	1,588	9	29	119	7,1	10	
9/16-12-BSW	9/16-16-BSF	14,288			11,2	30	127	9	12	
5/8-11-BSW	5/8-14-BSF	15,875	2,309	1,814	12,5	32	137	10	13	
11/16-11-BSW	11/16-14-BSF	17,462			14	37	149	11,2	14	
3/4-10-BSW	3/4-12-BSF	19,05	2,54	2,117	16	38	158	12,5	16	
7/8-9-BSW	7/8-11-BSF	22,225	2,822	2,309	18	45	172	14	18	
1-8-BSW	1-10-BSF	25,4	3,175	2,54						

^a In accordance with ISO 237^[1], tolerance h9 applies to precision shanks; for non-precision shanks, the tolerance is h11.

^b In accordance with ISO 237^[1], the tolerance is enlarged to h12 when including errors of form of the square and of its position in relation to the shank.