



SLOVENSKI STANDARD SIST ETS 300 476-4:1999

01-maj-1999

8 [[]HJbY]nVc`ýUbYVfYnj fj] bYHfY_ca i b]_UWfYfB97HL!'G_i db]j a Ygb]_f7 4!
DfcZcfa U]nUj Yc`g`UXbcgh]nj YXVYdfcfc_c`UfD=7 G4!("XY. Ca fYybUd`Ugh
fBK ?4!`Z_gbUfUX]g_UnU_`1]Hj`fl HL

Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI);
Protocol Implementation Conformance Statement (PICS) proforma; Part 4: Network
(NWK) layer - Fixed radio Termination (FT)

ITeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ETS 300 476-4:1999](https://standards.iteh.ai/catalog/standards/sist/c7210a59-dc92-4ff1-f82dd-d7864df52403/sist-ets-300-476-4-1999)

<https://standards.iteh.ai/catalog/standards/sist/c7210a59-dc92-4ff1-f82dd-d7864df52403/sist-ets-300-476-4-1999>

Ta slovenski standard je istoveten z: **ETS 300 476-4 Edition 1**

ICS:

33.070.30 Öä äæ) ^/ä à| lzæ) ^ Digital Enhanced Cordless
à!^: ç|çã} ^/æ|^\ [{ ~ } ä æä Telecommunications (DECT)
ÖÖÖVD


SIST ETS 300 476-4:1999

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ETS 300 476-4:1999](#)

<https://standards.iteh.ai/catalog/standards/sist/c7210a59-dc92-4ff1-f82dd-d7864df52403/sist-ets-300-476-4-1999>

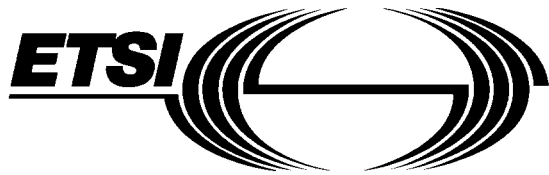

EUROPEAN
TELECOMMUNICATION
STANDARD

ETS 300 476-4

August 1996

Source: ETSI TC-RES

Reference: DE/RES-03042-4

ICS: 33.020, 33.060.50

Key words: DECT, CI, PICS

Radio Equipment and Systems (RES);
Digital Enhanced Cordless Telecommunications (DECT);
Common Interface (CI);
Protocol Implementation Conformance Statement (PICS)
proforma;
Part 4: Network (NWK) layer - Fixed radio Termination (FT)

ETSI

European Telecommunications Standards Institute

ETSI Secretariat

Postal address: F-06921 Sophia Antipolis CEDEX - FRANCE

Office address: 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

X.400: c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 92 94 42 00 - Fax: +33 93 65 47 16

Copyright Notification: No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1996. All rights reserved.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ETS 300 476-4:1999](https://standards.iteh.ai/catalog/standards/sist/c7210a59-dc92-4ff1-f82dd-d7864df52403/sist-ets-300-476-4-1999)
<https://standards.iteh.ai/catalog/standards/sist/c7210a59-dc92-4ff1-f82dd-d7864df52403/sist-ets-300-476-4-1999>

A.5.5	Protocol parameters	121
	A.5.5.1 Timers and constants support	121
A.5.6	Multi-layer dependencies	122
History		123

Questions

Table A.1: General condition table	16
Table A.2: Date of Statement	18
Table A.3 : IUT identification.....	18
Table A.4 : SUT identification	18
Table A.5 : Product supplier	18
Table A.6 : Client	19
Table A.7 : Contact person	19
Table A.8: Identification of protocol	19
Table A.9: Defect report and amendments number	19
Table A.10: Addenda implemented	20
Table A.11: Global statement of conformance	20
Table A.12: Entity supported	20
Table A.13: CC features supported	21
Table A.14: MM features supported	22
Table A.15: SS features (services) supported.....	23
Table A.16: LCE features supported	24
Table A.17: COMS features supported	24
Table A.18: CC procedures supported	25
Table A.19: MM procedures supported	26
Table A.20: SS protocols supported.....	27
Table A.21: COMS procedures supported	27
Table A.22: CLMS procedures supported	27
Table A.23: LCE procedures supported	28
Table A.24: LLME procedures supported.....	28
Table A.25: CC receiving (P to F) messages supported	29
Table A.26: CC sending (F to P) messages supported	30
Table A.27: CC-SETUP receiving (P to F) supported	31
Table A.28: CC-SETUP sending (F to P) supported	32
Table A.29: CC-INFO receiving (P to F) supported.....	33
Table A.30: CC-INFO sending (F to P) supported.....	33
Table A.31: CC-SETUP-ACK sending (F to P) supported.....	34
Table A.32: CC-CALL-PROC sending (F to P) supported.....	34
Table A.33: CC-ALERTING receiving (P to F) supported	35
Table A.34: CC-ALERTING sending (F to P) supported	35
Table A.35: CC-CONNECT receiving (P to F) supported.....	35
Table A.36: CC-CONNECT sending (F to P) supported	36
Table A.37: CC-CONNECT-ACK sending (F to P) supported.....	36
Table A.38: CC-RELEASE receiving (P to F) supported	36
Table A.39: CC-RELEASE sending (F to P) supported.....	36
Table A.40: CC-RELEASE-COM receiving (P to F) supported	37
Table A.41: CC-RELEASE-COM sending (F to P) supported	37
Table A.42: CC-SERVICE-CHANGE receiving (P to F) supported	37
Table A.43: CC-SERVICE-CHANGE sending (F to P) supported	38
Table A.44: CC-SERVICE-ACCEPT receiving (P to F) supported	38
Table A.45: CC-SERVICE-ACCEPT sending (F to P) supported	38
Table A.46: CC-SERVICE-REJECT receiving (P to F) supported	38
Table A.47: CC-SERVICE-REJECT sending (F to P) supported	38
Table A.48: CC-NOTIFY sending (F to P) supported	39
Table A.49: IWU-INFO receiving (P to F) supported.....	39
Table A.50: IWU-INFO sending (F to P) supported.....	39
Table A.51: MM message receiving (P to F) supported	40

Table A.52: MM message sending (F to P) supported.....	41
Table A.53: ACCESS-RIGHTS-ACCEPT sending (F to P) supported.....	42
Table A.54: ACCESS-RIGHTS-REJECT sending (F to P) supported.....	42
Table A.55: ACCESS-RIGHTS-REQUEST receiving (P to F) supported.....	42
Table A.56: ACCESS-RIGHTS-TERMINATE-ACCEPT receiving (P to F) supported.....	42
Table A.57: ACCESS-RIGHTS-TERMINATE-ACCEPT sending (F to P) supported.....	43
Table A.58: ACCESS-RIGHTS-TERMINATE-REJECT receiving (P to F) supported.....	43
Table A.59: ACCESS-RIGHTS-TERMINATE-REJECT sending (F to P) supported.....	43
Table A.60: ACCESS-RIGHTS-TERMINATE-REQUEST receiving (P to F) supported.....	43
Table A.61: ACCESS-RIGHTS-TERMINATE-REQUEST sending (F to P) supported.....	43
Table A.62: AUTHENTICATE-REJECT receiving (P to F) supported.....	44
Table A.63: AUTHENTICATE-REJECT sending (F to P) supported.....	44
Table A.64: AUTHENTICATE-REPLY receiving (P to F) supported.....	44
Table A.65: AUTHENTICATE-REPLY sending (F to P) supported.....	45
Table A.66: AUTHENTICATE-REQUEST receiving (P to F) supported.....	45
Table A.67: AUTHENTICATE-REQUEST sending (F to P) supported.....	45
Table A.68: CIPHER-REJECT receiving (P to F) supported.....	45
Table A.69: CIPHER-REJECT sending (F to P) supported.....	46
Table A.70: CIPHER-REQUEST sending (F to P) supported.....	46
Table A.71: CIPHER-SUGGEST receiving (P to F) supported.....	46
Table A.72: DETACH receiving (P to F) supported.....	46
Table A.73: IDENTITY-REPLY receiving (P to F) supported.....	47
Table A.74: IDENTITY-REQUEST sending (F to P) supported.....	47
Table A.75: KEY-ALLOCATE sending (F to P) supported.....	47
Table A.76: LOCATE-ACCEPT sending (F to P) supported.....	48
Table A.77: LOCATE-REJECT sending (F to P) supported.....	48
Table A.78: LOCATE-REQUEST receiving (P to F) supported.....	48
Table A.79: MM-INFO-ACCEPT sending (F to P) supported.....	48
Table A.80: MM-INFO-REJECT sending (F to P) supported.....	49
Table A.81: MM-INFO-REQUEST receiving (P to F) supported.....	49
Table A.82: MM-INFO-SUGGEST sending (F to P) supported.....	49
Table A.83: TEMPORARY-IDENTITY-ASSIGN sending (F to P) supported.....	49
Table A.84: TEMPORARY-IDENTITY-ASSIGN-ACK receiving (P to F) supported.....	49
Table A.85: TEMPORARY-IDENTITY-ASSIGN-REJECT receiving (P to F) supported.....	50
Table A.86: CRSS & CISS messages receiving (P to F) supported.....	50
Table A.87: CRSS & CISS messages sending (F to P) supported.....	50
Table A.88: FACILITY-ciss receiving (P to F) supported.....	51
Table A.89: FACILITY-ciss sending (F to P) supported.....	51
Table A.90: HOLD receiving (P to F) supported.....	51
Table A.91: HOLD sending (F to P) supported.....	51
Table A.92: HOLD-ACK receiving (P to F) supported.....	51
Table A.93: HOLD-ACK sending (F to P) supported.....	52
Table A.94: HOLD-REJECT receiving (P to F) supported.....	52
Table A.95: HOLD-REJECT sending (F to P) supported.....	52
Table A.96: RETRIEVE receiving (P to F) supported.....	52
Table A.97: RETRIEVE sending (F to P) supported.....	52
Table A.98: RETRIEVE-ACK receiving (P to F) supported.....	52
Table A.99: RETRIEVE-ACK sending (F to P) supported.....	53
Table A.100: RETRIEVE-REJECT receiving (P to F) supported.....	53
Table A.101: RETRIEVE-REJECT sending (F to P) supported.....	53
Table A.102: CISS-REGISTER receiving (P to F) supported.....	53
Table A.103: CISS-REGISTER sending (F to P) supported.....	53
Table A.104: CISS-RELEASE-COM receiving (P to F) supported.....	54
Table A.105: CISS-RELEASE-COM sending (F to P) supported.....	54
Table A.106: COMS message receiving (P to F) supported.....	54
Table A.107: COMS message sending (F to P) supported.....	55
Table A.108: COMS-SETUP receiving (P to F) supported.....	55
Table A.109: COMS-SETUP sending (F to P) supported.....	55
Table A.110: COMS-INFO receiving (P to F) supported.....	56
Table A.111: COMS-INFO sending (F to P) supported.....	56
Table A.112: COMS-ACK receiving (P to F) supported.....	56
Table A.113: COMS-ACK sending (F to P) supported.....	56
Table A.114: COMS-CONNECT receiving (P to F) supported.....	56

Table A.115: COMS-CONNECT sending (F to P) supported.....	57
Table A.116: COMS-RELEASE receiving (P to F) supported	57
Table A.117: COMS-RELEASE sending (F to P) supported.....	57
Table A.118: COMS-RELEASE-COM receiving (P to F) supported.....	57
Table A.119: COMS-RELEASE-COM sending (F to P) supported	57
Table A.120: CLMS message receiving (P to F) supported	58
Table A.121: CLMS message sending (F to P) supported.....	58
Table A.122: CLMS-VARIABLE receiving (P to F) supported	58
Table A.123: CLMS-VARIABLE sending (F to P) supported.....	58
Table A.124: CLMS-FIXED long sending (F to P) supported.....	59
Table A.125: CLMS-FIXED extended sending (F to P) supported	59
Table A.126: LCE message receiving (P to F) supported	59
Table A.127: LCE message sending (F to P) supported.....	59
Table A.128: LCE-PAGE-RESPONSE receiving (P to F) supported	60
Table A.129: LCE-PAGE-REJECT sending (F to P) supported	60
Table A.130: LCE-REQUEST-PAGE short sending (F to P) supported.....	60
Table A.131: LCE-REQUEST-PAGE long sending (F to P) supported.....	60
Table A.132: Sending complete supported	60
Table A.133: Delimiter request supported	61
Table A.134: Repeat indicator (non prioritised list) supported.....	61
Table A.135: Repeat indicator (prioritised list) supported.....	61
Table A.136: Type of service class in basic service supported.....	61
Table A.137: Basic service - Normal call set-up supported.....	61
Table A.138: Basic service - Internal call set-up supported	62
Table A.139: Basic service - Emergency call set-up supported	62
Table A.140: Basic service - Service call set-up supported	62
Table A.141: Basic service - External handover call set-up supported	62
Table A.142: Single display supported.....	62
Table A.143: Single-keypad supported.....	63
Table A.144: Release-reason supported.....	63
Table A.145: Signal supported	63
Table A.146: Timer restart supported.....	63
Table A.147: Test hook control supported.....	63
Table A.148: Message header CC-ALERTING supported.....	64
Table A.149: Message header CC-CALL-PROC supported.....	64
Table A.150: Message header CC-SETUP supported.....	64
Table A.151: Message header CC-CONNECT supported.....	65
Table A.152: Message header CC-SETUP-ACK supported	65
Table A.153: Message header CC-CONNECT-ACK supported.....	65
Table A.154: Message header CC-SERVICE-CHANGE supported.....	66
Table A.155: Message header CC-SERVICE-ACCEPT supported	66
Table A.156: Message header CC-SERVICE-REJECT supported	66
Table A.157: Message header CC-RELEASE supported	67
Table A.158: Message header CC-RELEASE-COM supported.....	67
Table A.159: Message header IWU-INFO supported	67
Table A.160: Message header CC-NOTIFY supported.....	67
Table A.161: Message header CC-INFO supported	68
Table A.162: Message header HOLD supported	68
Table A.163: Message header HOLD-ACK supported.....	68
Table A.164: Message header HOLD-REJECT supported	68
Table A.165: Message header RETRIEVE supported	69
Table A.166: Message header RETRIEVE-ACK supported.....	69
Table A.167: Message header RETRIEVE-REJECT supported	69
Table A.168: Message header AUTHENTICATE-REQUEST supported.....	69
Table A.169: Message header AUTHENTICATE-REPLY supported.....	70
Table A.170: Message header KEY-ALLOCATE supported	70
Table A.171: Message header AUTHENTICATE-REJECT supported	70
Table A.172: Message header ACCESS-RIGHTS-REQUEST supported	70
Table A.173: Message header ACCESS-RIGHTS-ACCEPT supported.....	70
Table A.174: Message header ACCESS-RIGHTS-REJECT supported	71
Table A.175: Message header ACCESS-RIGHTS-TERMINATE-REQUEST supported.....	71
Table A.176: Message header ACCESS-RIGHTS-TERMINATE-ACCEPT supported.....	71
Table A.177: Message header ACCESS-RIGHTS-TERMINATE-REJECT supported	71

Table A.178: Message header CIPHER-REQUEST supported.....	71
Table A.179: Message header CIPHER-SUGGEST supported.....	72
Table A.180: Message header CIPHER-REJECT supported.....	72
Table A.181: Message header MM-INFO-REQUEST supported.....	72
Table A.182: Message header MM-INFO-ACCEPT supported.....	72
Table A.183: Message header MM-INFO-SUGGEST supported.....	72
Table A.184: Message header MM-INFO-REJECT supported.....	73
Table A.185: Message header LOCATE-REQUEST supported.....	73
Table A.186: Message header LOCATE-ACCEPT supported.....	73
Table A.187: Message header DETACH supported.....	73
Table A.188: Message header LOCATE-REJECT supported.....	73
Table A.189: Message header IDENTITY-REQUEST supported.....	74
Table A.190: Message header IDENTITY-REPLY supported.....	74
Table A.191: Message header TEMPORARY-IDENTITY-ASSIGN supported.....	74
Table A.192: Message header TEMPORARY-IDENTITY-ASSIGN-ACK supported.....	74
Table A.193: Message header TEMPORARY-IDENTITY-ASSIGN-REJECT supported.....	74
Table A.194: Message header CISS-RELEASE-COM supported.....	75
Table A.195: Message header FACILITY supported.....	75
Table A.196: Message header CISS-REGISTER supported.....	75
Table A.197: Message header COMS-SETUP supported.....	75
Table A.198: Message header COMS-CONNECT supported.....	75
Table A.199: Message header COMS-RELEASE supported.....	76
Table A.200: Message header COMS-RELEASE-COM supported.....	76
Table A.201: Message header COMS-INFO supported.....	76
Table A.202: Message header COMS-ACK supported.....	76
Table A.203: Message header CLMS-VARIABLE supported.....	76
Table A.204: Message header LCE-PAGE-RESPONSE supported.....	77
Table A.205: Message header LCE-PAGE-REJECT supported.....	77
Table A.206: Allocation type supported.....	77
Table A.207: Alphanumeric supported.....	77
Table A.208: Auth-type supported.....	78
Table A.209: Call attributes supported.....	79
Table A.210: Call identity supported.....	80
Table A.211: Called party number supported.....	80
Table A.212: Called party subaddress supported.....	80
Table A.213: Calling party number supported.....	81
Table A.214: Cipher info supported.....	81
Table A.215: Type connection attributes supported.....	81
Table A.216: Connection attributes (symmetric) supported.....	82
Table A.217: Connection attributes (asymmetric) supported.....	83
Table A.218: Connection identity supported.....	84
Table A.219: Duration supported.....	84
Table A.220: End-to-end compatibility supported.....	85
Table A.221: Facility supported.....	85
Table A.222: Type of feature activate/indicate supported.....	86
Table A.223: Feature activate register recall supported.....	86
Table A.224: Feature activate external handover switch supported.....	86
Table A.225: Feature activate queue entry request supported.....	86
Table A.226: Feature activate indication of subscriber number supported.....	87
Table A.227: Feature activate feature key supported.....	87
Table A.228: Feature activate specific line selection supported.....	87
Table A.229: Feature activate specific trunk carrier selection supported.....	87
Table A.230: Feature activate control of echo control functions supported.....	88
Table A.231: Feature activate cost information supported.....	88
Table A.232: Feature indicate register recall supported.....	88
Table A.233: Feature indicate external handover switch supported.....	89
Table A.234: Feature indicate queue entry request supported.....	89
Table A.235: Feature indicate indication of subscriber number supported.....	90
Table A.236: Feature indicate feature key supported.....	90
Table A.237: Feature indicate specific line selection supported.....	90
Table A.238: Feature indicate specific trunk carrier selection supported.....	91
Table A.239: Feature indicate control of echo control functions supported.....	91
Table A.240: Feature indicate cost information supported.....	92

Table A.241: Class Fixed identity supported.....	92
Table A.242: Fixed identity ARI Class A or PARK Class A supported	93
Table A.243: Fixed identity ARI Class B or PARK Class B supported	93
Table A.244: Fixed identity ARI Class C or PARK Class C supported.....	94
Table A.245: Fixed identity ARI Class D or PARK Class D supported.....	94
Table A.246: Fixed identity ARI+RPN Class A supported	95
Table A.247: Fixed identity ARI+RPN Class B supported	95
Table A.248: Fixed identity ARI+RPN Class C supported	96
Table A.249: Fixed identity ARI+RPN Class D supported.....	96
Table A.250: Identity type supported	96
Table A.251: Identity type Portable identity supported.....	97
Table A.252: Identity type NWK assigned identity supported.....	97
Table A.253: Identity type Fixed identity supported	97
Table A.254: Identity type Proprietary supported.....	98
Table A.255: Info type supported.....	98
Table A.256: IWU attributes supported	99
Table A.257: IWU packet supported	101
Table A.258: IWU-to-IWU supported	102
Table A.259: Key supported	102
Table A.260: Location area info types supported	102
Table A.261: Location area.....	103
Table A.262: Location area with ELI no GSM info included supported	103
Table A.263: Location area With ELI GSM info included supported	103
Table A.264: Multi-display supported	104
Table A.265: Multi-keypad supported.....	104
Table A.266: Type NWK assigned identity supported	104
Table A.267: Network assigned identity GSM-TMSI supported	104
Table A.268: Network assigned identity Proprietary supported	105
Table A.269: Type NWK parameter supported	105
Table A.270: Network parameter GSM supported	105
Table A.271: Network parameter Proprietary supported	105
Table A.272: Type of portable identity supported	106
Table A.273: Portable identity IPUI-N or IPEI supported.....	106
Table A.274: Portable identity - type of IPUI-o supported.....	106
Table A.275: Portable identity - type of IPUI-P supported.....	107
Table A.276: Portable identity - type IPUI-Q supported.....	107
Table A.277: Portable identity - type of IPUI-R supported.....	107
Table A.278: Portable identity - type IPUI-S supported	108
Table A.279: Portable identity - type of IPUI-T supported	108
Table A.280: Portable identity - type IPUI-U supported.....	108
Table A.281: Portable identity - type default individual TPUI supported.....	109
Table A.282: Portable identity - type assigned individual TPUI supported	109
Table A.283: Portable identity - type connectionless group TPUI supported	109
Table A.284: Portable identity - type call group TPUI supported.....	110
Table A.285: Progress indicator supported	110
Table A.286: Rand supported.....	110
Table A.287: Type rate parameters supported.....	110
Table A.288: Rate parameters	111
Table A.289: Rate parameters	112
Table A.290: Reject reason supported	112
Table A.291: RES supported	113
Table A.292: RS supported	113
Table A.293: Segmented info supported	113
Table A.294: Service change info supported.....	114
Table A.295: Service class supported	114
Table A.296: Setup capability supported	114
Table A.297: Terminal capability supported	115
Table A.298: Transit delay supported.....	116
Table A.299: Window size supported	116
Table A.300: ZAP supported	116
Table A.301: Escape information elements receiving (P to F) supported	116
Table A.302: Escape information elements sending (F to P) supported	117
Table A.303: Escape supported	117

Table A.304: Escape to proprietary supported	117
Table A.305: Escape for extension supported	117
Table A.306: Codeset shift supported	117
Table A.307: Short TPUI address of LCE-request paging message supported	118
Table A.308: Long TPUI address of LCE-request paging message supported	118
Table A.309: Long IPUI address of LCE-request paging message supported	118
Table A.310: Single section of CLMS-fixed long format message	119
Table A.311: Address section of CLMS-fixed extended format message	119
Table A.312: Data section of CLMS-fixed extended format message supported	119
Table A.313: Error & exception handling procedures supported	120
Table A.314: Timers and constants supported	121
Table A.315: Multi-layer dependencies	122

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ETS 300 476-4:1999](https://standards.iteh.ai/catalog/standards/sist/c7210a59-dc92-4ff1-f82dd-d7864df52403/sist-ets-300-476-4-1999)

<https://standards.iteh.ai/catalog/standards/sist/c7210a59-dc92-4ff1-f82dd-d7864df52403/sist-ets-300-476-4-1999>

Blank page

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ETS 300 476-4:1999](https://standards.iteh.ai/catalog/standards/sist/c7210a59-dc92-4ff1-f82dd-d7864df52403/sist-ets-300-476-4-1999)

<https://standards.iteh.ai/catalog/standards/sist/c7210a59-dc92-4ff1-f82dd-d7864df52403/sist-ets-300-476-4-1999>

Foreword

This European Telecommunication Standard (ETS) has been produced by the Radio Equipment and Systems (RES) Technical Committee of the European Telecommunications Standards Institute (ETSI).

The DECT Common interface Protocol Implementation Conformance Statement (PICS) proforma standard comprises seven parts as follows:

- Part 1: "Network (NWK) layer - Portable radio Termination (PT)";
- Part 2: "Data Link Control (DLC) layer - Portable radio Termination (PT)";
- Part 3: "Medium Access Control (MAC) layer - Portable radio Termination (PT)";
- Part 4: "Network (NWK) layer - Fixed radio Termination (FT)";**
- Part 5: "Data Link Control (DLC) layer - Fixed radio Termination (FT)";
- Part 6: "Medium Access Control (MAC) layer - Fixed radio Termination (FT)";
- Part 7: "Physical layer".

Annex A contains the PICS proforma for the FT network layer.

Transposition dates	
Date of adoption of this ETS:	16 August 1996
Date of latest announcement of this ETS (doa):	30 November 1996
Date of latest publication of new National Standard or endorsement of this ETS (dop/e):	31 May 1997
Date of withdrawal of any conflicting National Standard (dow):	31 May 1997

Blank page

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ETS 300 476-4:1999](https://standards.iteh.ai/catalog/standards/sist/c7210a59-dc92-4ff1-f82dd-d7864df52403/sist-ets-300-476-4-1999)

<https://standards.iteh.ai/catalog/standards/sist/c7210a59-dc92-4ff1-f82dd-d7864df52403/sist-ets-300-476-4-1999>

1 Scope

This European Telecommunication Standard (ETS) provides the Protocol Implementation Conformance Statement (PICS) proforma for the Digital Enhanced Cordless Telecommunications Network layer at the Fixed Termination as defined in ETS 300 175 Part 5 [5] in compliance with the relevant requirements and in accordance with the relevant guidance given in ISO/IEC 9646-7 [14].

The supplier of an implementation which is claimed to conform to ETS 300 175 Part 5 [5] is required to complete a copy of the PICS proforma provided in the annex A of this standard.

2 Normative references

This ETS incorporates, by dated or undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this ETS only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

- [1] ETS 300 175-1: "Radio Equipment and Systems (RES); Digital European Cordless Telecommunications (DECT); Common Interface (CI); Part 1: Overview".
- [2] ETS 300 175-2: "Radio Equipment and Systems (RES); Digital European Cordless Telecommunications (DECT); Common Interface (CI); Part 2: Physical Layer".
- [3] ETS 300 175-3: "Radio Equipment and Systems (RES); Digital European Cordless Telecommunications (DECT); Common Interface (CI); Part 3: Medium Access Control (MAC) layer".
- [4] ETS 300 175-4: "Radio Equipment and Systems (RES); Digital European Cordless Telecommunications (DECT); Common Interface (CI); Part 4: Data Link Control (DLC) layer".
- [5] ETS 300 175-5: "Radio Equipment and Systems (RES); Digital European Cordless Telecommunications (DECT); Common Interface (CI); Part 5: Network (NWK) layer".
- [6] ETS 300 175-6: "Radio Equipment and Systems (RES); Digital European Cordless Telecommunications (DECT); Common Interface (CI); Part 6: Identities and addressing".
- [7] ETS 300 175-7: "Radio Equipment and Systems (RES); Digital European Cordless Telecommunications (DECT); Common Interface (CI); Part 7: Security features".
- [8] ETS 300 175-8: "Radio Equipment and Systems (RES); Digital European Cordless Telecommunications (DECT); Common Interface (CI); Part 8: Speech coding and transmission".
- [9] ETS 300 175-9: "Radio Equipment and Systems (RES); Digital European Cordless Telecommunications (DECT); Common Interface (CI); Part 9: Public Access Profile (PAP)".
- [10] ETS 300 406 (1995): "Methods for Testing and Specification (MTS); Protocol and profile conformance testing specifications; Standardization methodology".
- [11] ISO/IEC 9646-1 (1995): "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 1: General concepts".