

ETSI TR 144 901 V8.0.0 (2009-01)

Technical Report

Digital cellular telecommunications system (Phase 2+); External Network Assisted Cell Change (NACC) (3GPP TR 44.901 version 8.0.0 Release 8)



iTeh STANDARD PREVIEW
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/2615dc84-7107-4bc5-bb98-3c8c59fd847/etsi-tr-144-901-v8.0.0-2009-01>



Reference

RTR/TSGG-0244901v800

Keywords

GSM

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

http://portal.etsi.org/chaicor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2009.
All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™**, **TIPHON™**, the TIPHON logo and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.

3GPP™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

LTE™ is a Trade Mark of ETSI currently being registered

for the benefit of its Members and of the 3GPP Organizational Partners.

GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Report (TR) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

ETSI STANDARD PREVIEW
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/26d53e84-7107-4bc5-bb98-3c8c59fd847/etsi-tr-144-901-v8.0.0>
2009-01

Contents

Intellectual Property Rights	2
Foreword.....	2
Foreword.....	5
1 Scope	6
2 References	6
3 Definitions and abbreviations.....	6
3.1 Definitions	6
3.2 Abbreviations	7
4 Introduction and Motivation.....	7
4.1 Task Description	7
4.2 GPRS Cell Reselection pre-Release 4	7
4.3 NACC in GERAN Release 4, Short description	7
4.3.1 System Information Reception	8
4.3.2 Cell Change Notification (CCN) Mode Procedures	8
4.4 Extension of NACC in Release 5	8
4.4.1 General.....	8
4.4.2 Short Technical Description	10
5 Requirements.....	10
5.1 Architectural Requirements.....	10
5.1.1 Case 16 - Intra-UTRAN case.....	11
5.1.2 Case 4, 8, 12: GERAN → UTRAN	11
5.1.3 Case 13 - 15: UTRAN → GERAN	12
5.2 Node Requirements	12
5.2.1 BSC.....	12
5.2.2 RNC.....	12
5.2.3 SGSN	13
5.2.4 MSC.....	13
5.3 Interface Requirements.....	13
5.3.1 Gb interface	13
5.3.2 A interface	13
5.3.3 Iu interface.....	13
5.3.4 Iur-g (Iur) interface	13
5.3.5 Gn interface	14
5.3.6 Uu interface	14
5.3.7 Um interface	14
6 Generic mechanism for exchange of RAN information.....	14
6.1 General	14
6.2 Generic RIM procedures for exchange of RAN information	15
6.2.1 General.....	15
6.2.2 RAN Information Request procedure	15
6.2.3 RAN Information Send procedure	15
6.2.4 RIM support in CN/RAN nodes.	16
6.3 Messages for RAN information.....	16
6.3.1 Message format.....	16
6.3.2 Message Type	16
6.3.3 Addressing and routing	17
6.3.4 Container Prefix and Container Units	18
6.3.4.1 General	18
6.3.4.2 Container Prefix	18
6.3.4.3 Container Unit.....	18
7 Exchange of RAN information for external NACC	18

7.1 Principles for use of the generic mechanism for exchange of RAN information..... 18

7.1.1 General..... 18

7.1.2 Container Unit Disposition for NACC..... 19

7.1.3 Error Handling 19

7.1.4 External NACC software support in RAN nodes 19

8 Interface load..... 19

9 Phased approach for the implementation 20

10 Open Issues 20

11 Specification Impact and Associated Change Requests 20

11.1 General 20

11.2 3GPP TS 23.060 GPRS; Stage 2 description 20

11.3 3GPP TS 44.018 Mobile radio interface layer 3 specification 21

11.4 3GPP TS 44.060 GPRS RLC/MAC Protocol 21

11.5 3GPP TS 48.018 BSS GPRS Protocol (BSSGP)..... 21

11.6 3GPP TS 29.060 GPRS Tunneling Protocol (GTP)..... 21

11.7 3GPP TS 25.41x UTRAN Iu interface 21

Annex A: Change History 22

History 23

iTeh STANDARD PREVIEW
 (standards.iteh.ai)
 Full standard:
<https://standards.iteh.ai/catalog/standards/sist/26d5dc84-7107-4bc5-bb98-3c8c59fd847/etsi-tr-144-901-v8.0.0-2009-01>

Foreword

This Technical Report has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

iTeh STANDARD PREVIEW
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/28c55dc84-7107-4bc5-bb98-3c8c59fd847/etsi-tr-144-901-v8.0.0-2009-01>

1 Scope

This Technical Report provides background information, motivations, concepts and requirements regarding an extended Network Assisted Cell Change (NACC) feature for external cell change support. Cell change between GERAN and UTRAN cells is outside the scope of this report, although consideration has been taken in order to allow an easier extensibility to that case. The extension is based on the Release 4 version of the NACC feature where the mobile station is only supported by the NACC when performing internal cell re-selection, i.e. within a BSC. The extension of the feature is for GERAN just affecting BSS and for the core network the SGSN and signalling links between these network nodes. To support cell changes between GERAN and UTRAN, also the Um and the Uu interfaces are affected.

The evolved Release 4 NACC proposal as described in this TR provides the basis for the detailed Stage 2 and stage 3 specification work. The feature will be developed in a phased approach and a longer-term vision is presented in the report.

The focus of the TR is to:

- Define the requirements on different nodes
- Specify the requirements for the interfaces
- Propose a plan for the work item project
- Evaluation of what does and does not need to be standardised

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TD GP-010361, 'Network Assisted Cell Change; Concept document'
- [2] 3GPP TS 48.018: "General Packet Radio Service (GPRS); BSS GPRS Protocol (BSSGP)".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the following definitions apply:

External cell change: Change of cells where old and new cell do not belong to the same BSC.

External neighbouring cells: Cells listed in the BA-lists within a BSC that belongs to other BSCs.

Extended neighbouring cell list: List of System information received from the external neighbour cells to be used in the Network Assisted Cell Change procedure.

Service outage time: The time between the last received uplink RLC block from the mobile station in the old cell and the mobile station's first uplink RLC block received in the new cell.

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

CCN	Cell Change Notification
EDGE	Enhanced Data rates for GSM Evolution
GERAN	GSM/EDGE Radio Access Network
GPRS	General Packet Radio Service
NACC	Network Assisted Cell Change
NC	Network Control mode (can be NC0, NC1 or NC2)
O&M	Operations and Maintenance
PACCH	Packet Associated Common Control Channel
PS	Packet Switched
QoS	Quality of Service
RN	Radio Network
RAN	Radio Access Network
RIM	RAN Information Management
UE	User Equipment
UTRAN	Universal Terrestrial Radio Access Network

4 Introduction and Motivation

4.1 Task Description

The purpose of this new work task is to shorten the service outage time at cell reselection in packet transfer mode when the originating and the target cells belong to different BSCs/RNCs. This will improve the delivered quality of service for most QoS classes.

4.2 GPRS Cell Reselection pre-Release 4

A pre-Release 4 GPRS/EDGE mobile station shall in modes NC0 and NC1 perform cell reselection purely based on neighbour cell measurements and independent of whether a packet transfer is ongoing or not. The cell change is performed without notifying the network. The MS is then not allowed to make random access in order to restart the data transfer in the new cell until a consistent set of system information for that cell has been correctly received. This behaviour is also used in Release 4 for the cases when a GPRS mobile station moves between GSM cells belonging to different BSCs or from a GSM to a UMTS cell.

If the MS is trying to collect the target cell system information before the cell change, the MS may lose downlink data, which then has to be retransmitted in the new cell. If on the other hand the system information is collected after entering the target cell, the MS must first synchronise to the system information broadcast cycle and then collect the required system information before starting to re-establish the data transfer. In both cases the MS will lose a certain amount of time and downlink data when collecting the system information. There is also a risk that one or more RLC SDUs have to be completely retransmitted in the new cell as the cell change can be performed anytime during an ongoing transfer.

For these reasons the Network Assisted Cell Change feature was introduced in Release 4 for MSs performing cell changes between cells belonging to the same BSC. The feature reduced the service outage time for an MS in packet transfer mode from a couple of seconds down to 300-700 ms by giving the network a possibility to assist the MS before and during the cell change. The assistance is given both as sending of neighbouring cell system information and with introduction of new procedures.

4.3 NACC in GERAN Release 4, Short description

NACC, the Network Assisted Cell Change feature introduced in Release 4 is a tool to minimize the service outage time for all QoS classes when a GPRS MS in packet transfer mode moves between GSM cells belonging to the same BSC. An overview of the Release 4 behaviour is described in GP-010361.

NOTE: In the Release 4, NACC is not implemented to support cell reselections between GERAN and UTRAN or between BSCs. In this technical report a possible introduction of these cases is outlined.

The NACC procedures are introduced as a mandatory feature for an Release 4 MS to speed up the cell re-selection. There are two main set of procedures specified for NACC, independent from each other:

- One set which supports the mobile station with neighbouring cell system information and
- One set which prepares the MS and puts the MS into Cell Change Notification mode (CCN mode) during a short period of time before the cell change.

4.3.1 System Information Reception

In the first set of procedures the network may - independent of the NC and the CCN modes - send neighbouring cell system information to an MS. The information is sent on the PACCH and is required for initial access after a cell change. An MS in Packet Transfer mode, which receives this information, shall store the information for 30 seconds. The MS may then use this information in the new cell. In the new cell the MS may then initiate access and receive missing system information from BCCH or PBCCH on PACCH by using the Packet PSI/SI Status procedures.

4.3.2 Cell Change Notification (CCN) Mode Procedures

In the second set of procedures a Release 4 MS in packet transfer mode enters CCN mode when a cell reselection is determined and if the network has ordered the MS to use CCN within the cell and towards the target cell. This order can either be generally given by the network in system information or be individually addressed to a certain mobile.

When in CCN mode the MS informs the network with a Cell Change Notification message that the MS wants to reselect cell. The message contains the identity of the target cell. After sending the message to the network the mobile station continues the ongoing packet transfer for either a maximum time of about 1 second or until the network responds with a Packet Cell Change Continue or Packet Cell Change Order message. The Packet Cell Change Order message may indicate another target cell than the one proposed by the mobile station. After the delay, the MS leaves CCN mode. The MS also leaves CCN mode if it returns to Packet Idle mode, if it enters NC2 mode or if the criteria for camping on the old cell are no longer fulfilled.

In CCN mode the network also has an opportunity to send neighbouring cell system information required for immediate initial access in the new cell when the re-selection has been performed. In CCN mode, the network may also terminate the ongoing packet transfer before sending the Packet Cell Change Continue or the Packet Cell Change Order message to the MS.

4.4 Extension of NACC in Release 5

4.4.1 General

In Release 4 of the GERAN specifications, the NACC procedures cover only cell re-selection to other GERAN cells within the same BSC where the BSC has system information available for the target cell.

This limits the value of NACC, as external BSC cell changes and also cell changes between GERAN and UTRAN cells in some network configurations are of frequent occurrence. Extensions of the NACC feature to handle also external cell changes will therefore be of a certain value. For cell changes between Gb and Iu mode within GERAN and between GERAN *A/Gb mode* and UTRAN *Iu-mode* it is not obvious that the service for the user is improved by NACC. These cases might require rather heavy signalling to re-establish the RRC, the radio access bearers and the MM connections before the user service can be restarted in the target cell.

A rough estimation of the occurrence of inter BSC cell changes in an assumed scenario where the BSC area consists of a regular hexagonal area surrounded by other BSC areas (Figure 4.1.1.a) and subdivided into smaller, hexagonal clusters is shown in Table 4.1.1.a. The traffic between these areas is then assumed to be equal distributed.

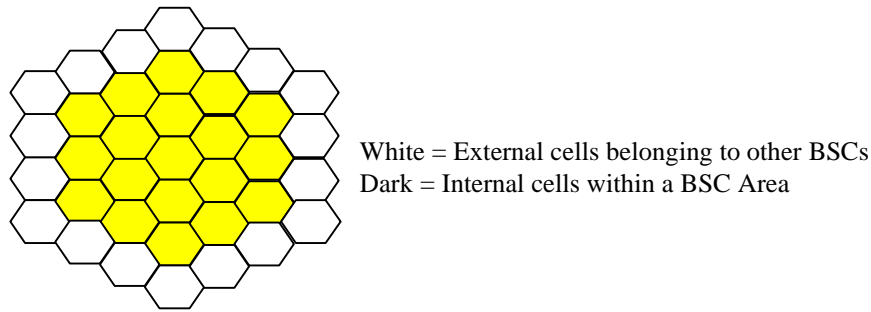


Figure 4.1.1.a: Example of internal/external cells for a BSC

Table 4.1.1.a: Relation between External to Total number of cell changes

BSC Area Size (in # of cells)	No of possible external cell changes	Relation External/Total no of cell changes (in %)
1	6	100
7	18	43
19	30	26
37	42	19
61	54	15
91	66	12
127	78	10
169	90	9
271	114	7
397	138	6
547	162	5
721	186	4
1141	234	3

The case with a network composed of a mixture of BTSs and BSCs from different vendors will also give much higher figures (approximately 30 - 50% of external cell changes) as the cell clusters for a certain BSC will look like islands among cell clusters from other vendors BSCs. This will also be the case having overlapping GERAN and UTRAN coverage.

This is a simplified network where cell reselection is assumed to be possible only to the 6 closest neighbours. In normal case the neighbouring cell lists can contain cells not directly close to the serving cell. So the figures for external cell changes will probably be higher.

There is also the case when UTRAN and GERAN overlay, which means that the two access technologies have different nodes in the access network.

Based on the reasons described above this study considers an extension of NACC to cover also cell changes to a cell managed by another BSC/RNC where the origin BSC/RNC does not have system information available for the target cell. This requires new signalling between BSCs/RNCs. The signalling may then be performed via the A, Gb, Iu and/or Iur-g interfaces to inform each BSC/RNC of the neighbouring cell system information.

NOTE: the exchange of information between BSCs/RNCs via A and Iu-cs interfaces is out of the scope of this document, although care has been taken in order to allow an easy extension for other features using inter BSC/RNC communication.

The Table 4.1.1.b below indicates scenarios to be considered for cell reselection between different BSCs/RNCs and the possibility to add the NACC feature to each case is then further discussed in this document. GERAN Gb indicates a BSC connected to SGSN only via Gb; GERAN Iu indicates a BSC connected to SGSN only via Iu and GERAN Iu/Gb indicates a BSC connected to SGSN via both Iu and Gb. This paper does not consider cell reselection scenarios involving CDMA 2000 cells.

Table 4.1.1.b: Possible combinations of cell changes