



SLOVENSKI STANDARD

SIST ETS 300 403-7:1999

01-januar-1999

Digitalno omrežje z integriranimi storitvami (ISDN) - Protokol digitalne naročniške signalizacije št. 1 (DSS1) - Signalizacijska omrežna plast za krmiljenje vodovnega osnovnega klica - 7. del: Abstraktni preskušalni niz (ATS) in delna dodatna informacija za preskušanje izvedbe protokola (PIXIT) - Proforma specifikacije za omrežje

Integrated Services Digital Network (ISDN); Digital Subscriber Signalling System No. one (DSS1) protocol; Signalling network layer for circuit-mode basic call control; Part 7: Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma specification for the network

[SIST ETS 300 403-7:1999
https://standards.iteh.ai/catalog/standards/sist/e78268d0-83b7-4ac1-8d76-ecd699487816/sist-ets-300-403-7-1999](https://standards.iteh.ai/catalog/standards/sist/e78268d0-83b7-4ac1-8d76-ecd699487816/sist-ets-300-403-7-1999)

Ta slovenski standard je istoveten z: ETS 300 403-7 Edition 1

ICS:


33.080	Digitalno omrežje z integriranimi storitvami (ISDN)	Integrated Services Digital Network (ISDN)
35.100.30	Omrežni sloj	Network layer

SIST ETS 300 403-7:1999 en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ETS 300 403-7:1999](#)

<https://standards.iteh.ai/catalog/standards/sist/e78268d0-83b7-4ac1-8d76-ed699487816/sist-ets-300-403-7-1999>

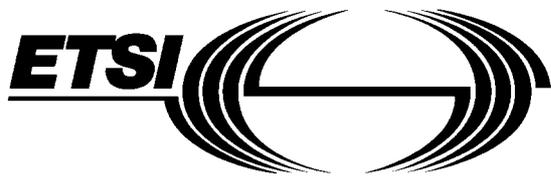

EUROPEAN
TELECOMMUNICATION
STANDARD

ETS 300 403-7

April 1998

Source: SPS

Reference: DE/SPS-05094

ICS: 33.020

Key words: ISDN, DSS1, layer 3, testing, ATS, PIXIT, network

**Integrated Services Digital Network (ISDN);
Digital Subscriber Signalling System No. one (DSS1) protocol;
Signalling network layer for circuit-mode basic call control;
Part 7: Abstract Test Suite (ATS) and partial Protocol
Implementation eXtra Information for Testing (PIXIT) proforma
specification for the network**

ETSI

European Telecommunications Standards Institute

ETSI Secretariat

Postal address: F-06921 Sophia Antipolis CEDEX - FRANCE

Office address: 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

Internet: secretariat@etsi.fr - <http://www.etsi.fr> - <http://www.etsi.org>

Tel.: +33 4 92 94 42 00 - Fax: +33 4 93 65 47 16

Copyright Notification: No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1998. All rights reserved.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ETS 300 403-7:1999](https://standards.iteh.ai/catalog/standards/sist/e78268d0-83b7-4ac1-8d76-ed699487816/sist-ets-300-403-7-1999)

<https://standards.iteh.ai/catalog/standards/sist/e78268d0-83b7-4ac1-8d76-ed699487816/sist-ets-300-403-7-1999>

Contents

Foreword	5
1 Scope	7
2 Normative references	7
3 Definitions and abbreviations	8
3.1 Definitions	8
3.2 Abbreviations	8
4 Abstract Test Method (ATM)	9
4.1 Description of ATM used	9
4.2 Conventions for test components and PCOs	9
4.3 Conventions for point-to-multipoint configurations	11
5 Untestable test purposes	11
6 ATS conventions	12
6.1 Declarations part	12
6.1.1 Type definitions	12
6.1.1.1 Simple type definitions	12
6.1.1.2 Structured type definitions	12
6.1.1.2.1 TTCN structured type definitions	12
6.1.1.2.2 ASN.1 structured type definitions	12
6.1.1.3 ASP type definitions	12
6.1.1.3.1 TTCN ASP type definitions	12
6.1.1.3.2 ASN.1 ASP type definitions	13
6.1.1.4 PDU type definitions	13
6.1.1.4.1 TTCN PDU type definitions	13
6.1.1.4.2 ASN.1 PDU type definitions	13
6.1.2 Test suite constants	13
6.1.3 Test suite parameters	13
6.1.4 Variables	13
6.1.4.1 Test suite variables	13
6.1.4.2 Test case variables	13
6.1.5 Test suite operation definitions	13
6.2 Constraints part	14
6.2.1 Structured type constraint declaration	14
6.2.2 ASN.1 type constraint declaration	14
6.2.3 ASP type constraint declaration	14
6.2.3.1 ASN.1 ASP type constraint declaration	14
6.2.3.2 TTCN ASP type constraint declaration	14
6.2.4 PDU type constraint declaration	15
6.2.4.1 ASN.1 PDU type constraint declaration	15
6.2.4.2 TTCN PDU type constraint declaration	15
6.2.5 Derived constraints	15
6.2.6 Parameterized constraints	15
6.2.7 Value assignment	15
6.2.7.1 Specific values	15
6.2.7.2 Matching values	15
6.3 Dynamic part	15
6.3.1 Test cases	15
6.3.2 Test steps	15
6.3.3 Defaults	15
7 ATS to TP map	15

8	PCTR conformance	16
9	PIXIT conformance	16
10	ATS conformance	16
	Annex A (normative): Protocol Conformance Test Report (PCTR) proforma	17
A.1	Identification summary	17
A.1.1	Protocol conformance test report	17
A.1.2	IUT identification	17
A.1.3	Testing environment	17
A.1.4	Limits and reservations	18
A.1.5	Comments	18
A.2	IUT conformance status	18
A.3	Static conformance summary	18
A.4	Dynamic conformance summary	18
A.5	Static conformance review report	19
A.6	Test campaign report	19
A.7	Observations	36
	Annex B (normative): Partial PIXIT proforma	37
B.1	Identification summary	37
B.2	Abstract test suite summary	37
B.3	Test laboratory	37
B.4	Client (of the test laboratory)	38
B.5	System Under Test (SUT)	38
B.6	Protocol information	39
B.6.1	Protocol identification	39
B.6.2	Configuration to be tested	39
B.6.3	Configuration options	39
B.6.4	Test management timers	40
B.6.5	Sending of messages by IUT	41
B.6.6	Parameter values	41
	Annex C (normative): Abstract Test Suite (ATS)	44
C.1	The TTCN Graphical form (TTCN.GR)	44
C.2	The TTCN Machine Processable form (TTCN.MP)	44
	Annex D (informative): General structure of ATS	45
	History	46

ITIH STANDARD PREVIEW
(standards.itech.ai)

[SIST ETS 300 403-7:1999](https://standards.itech.ai/catalog/standards/sist/e78268d0-83b7-4ac1-8d76-
ced699487816/sist-ets-300-403-7-1999)

[https://standards.itech.ai/catalog/standards/sist/e78268d0-83b7-4ac1-8d76-
ced699487816/sist-ets-300-403-7-1999](https://standards.itech.ai/catalog/standards/sist/e78268d0-83b7-4ac1-8d76-
ced699487816/sist-ets-300-403-7-1999)

Foreword

This European Telecommunication Standard (ETS) has been produced by the Signalling Protocols and Switching (SPS) Technical Committee of the European Telecommunications Standards Institute (ETSI).

This ETS is part 7 of a multi-part standard covering the Digital Subscriber Signalling System No. one (DSS1) protocol specification for the Integrated Services Digital Network (ISDN) signalling network layer for circuit-mode basic call control, as described below:

- Part 1: "Protocol specification [ITU-T Recommendation Q.931 (1993), modified]";
- Part 2: "Specification and Description Language (SDL) diagrams";
- Part 3: "Protocol Implementation Conformance Statement (PICS) proforma specification";
- Part 4: "Test Suite Structure and Test Purposes (TSS&TP) specification for the user";
- Part 5: "Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma specification for the user";
- Part 6: "TSS&TP specification for the network";
- Part 7: "ATS and partial PIXIT proforma specification for the network".**

Transposition dates	
Date of adoption of this ETS:	20 March 1998
Date of latest announcement of this ETS (doa):	31 July 1998
Date of latest publication of new National Standard or endorsement of this ETS (dop/e):	31 January 1999
Date of withdrawal of any conflicting National Standard (dow):	31 January 1999

Blank page

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ETS 300 403-7:1999](https://standards.iteh.ai/catalog/standards/sist/e78268d0-83b7-4ac1-8d76-ed699487816/sist-ets-300-403-7-1999)

<https://standards.iteh.ai/catalog/standards/sist/e78268d0-83b7-4ac1-8d76-ed699487816/sist-ets-300-403-7-1999>

1 Scope

This seventh part of ETS 300 403 specifies the Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma for the Network side of the T reference point or coincident S and T reference point (as defined in ITU-T Recommendation I.411 [10]) of implementations conforming to the standards for the signalling network layer for circuit-mode basic call control of the Digital Subscriber Signalling System No. one (DSS1) protocol for the pan-European Integrated Services Digital Network (ISDN), ETS 300 403-1 [1] and ETS 300 403-2 [2].

ETS 300 403-6 [4] specifies the Test Suite Structure and Test Purposes (TSS&TP) related to this ATS and partial PIXIT proforma specification. Other parts specify the TSS&TP and the ATS and partial PIXIT proforma for the User side of the T reference point or coincident S and T reference point of implementations conforming to ETS 300 403-1 [1] and ETS 300 403-2 [2].

2 Normative references

This ETS incorporates by dated and undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this ETS only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

- [1] ETS 300 403-1 (1995): "Integrated Services Digital Network (ISDN); Digital Subscriber Signalling System No. one (DSS1) protocol; Signalling network layer for circuit-mode basic call control; Part 1: Protocol specification [ITU-T Recommendation Q.931 (1993), modified]".
- [2] ETS 300 403-2 (1995): "Integrated Services Digital Network (ISDN); Digital Subscriber Signalling System No. one (DSS1) protocol; Signalling network layer for circuit-mode basic call control; Part 2: Specification and Description Language (SDL) diagrams".
- [3] ETS 300 403-3 (1996): "Integrated Services Digital Network (ISDN); Digital Subscriber Signalling System No. one (DSS1) protocol; Signalling network layer for circuit-mode basic call control; Part 3: Protocol Implementation Conformance Statement (PICS) proforma specification".
- [4] ETS 300 403-6: "Integrated Services Digital Network (ISDN); Digital Subscriber Signalling System No. one (DSS1) protocol; Signalling network layer for circuit-mode basic call control; Part 6: Test Suite Structure and Test Purposes (TSS&TP) specification for the network".
- [5] ISO/IEC 9646-1: "Information technology - OSI Conformance Testing Methodology and Framework; Part 1: General Concepts".
- [6] ISO/IEC 9646-2: "Information technology - OSI Conformance Testing Methodology and Framework; Part 2: Abstract Test Suite Specification".
- [7] ISO/IEC 9646-3: "Information technology - OSI Conformance Testing Methodology and Framework; Part 3: The Tree and Tabular Combined Notation".

- [8] ISO/IEC 9646-4: "Information technology - OSI Conformance Testing Methodology and Framework; Part 4: Test realization".
- [9] ISO/IEC 9646-5: "Information technology - OSI Conformance Testing Methodology and Framework; Part 5: Requirements on test laboratories and clients for the conformance assessment process".
- [10] ITU-T Recommendation I.411 (1993): "ISDN user-network interfaces - Reference configurations".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of this ETS, the following definitions apply:

Abstract Test Suite (ATS): See ISO/IEC 9646-1 [5].

Implementation Under Test (IUT): See ISO/IEC 9646-1 [5].

Lower Tester (LT): See ISO/IEC 9646-1 [5].

Point of Control and Observation (PCO): See ISO/IEC 9646-1 [5].

Protocol Implementation Conformance Statement (PICS): See ISO/IEC 9646-1 [5].

PICS proforma: See ISO/IEC 9646-1 [5].

Protocol Implementation eXtra Information for Testing (PIXIT): See ISO/IEC 9646-1 [5].

PIXIT proforma: See ISO/IEC 9646-1 [5].

System Under Test (SUT): See ISO/IEC 9646-1 [5].

Upper Tester (UT): See ISO/IEC 9646-1 [5].

3.2 Abbreviations

For the purposes of this ETS, the following abbreviations apply:

ASP	Abstract Service Primitive
ATM	Abstract Test Method
ATS	Abstract Test Suite
BA	Basic Access
CES	Connection Endpoint Suffix
CM	Co-ordination Message
CP	Co-ordination Point
ExTS	Executable Test Suite
IUT	Implementation Under Test
LT	Lower Tester
MOT	Means Of Testing
MTC	Main Test Component
PCO	Point of Control and Observation
PCTR	Protocol Conformance Test Report
PDU	Protocol Data Unit
PICS	Protocol Implementation Conformance Statement
PIXIT	Protocol Implementation eXtra Information for Testing
PRA	Primary Rate Access
PTC	Parallel Test Component

SUT	System Under Test
TCP	Test Co-ordination Procedures
TP	Test Purpose
TTCN	Tree and Tabular Combined Notation
UT	Upper Tester

4 Abstract Test Method (ATM)

4.1 Description of ATM used

The requirement for testing the network IUT is to focus on the behaviour of the network IUT at the user-network interface where a T reference point or coincident S and T reference point applies. Thus the IUT is the network DSS1 protocol entity at a particular user-network interface and is not the whole network.

It is possible to specify an ATS based on a Single party (remote) test method for such an IUT. However, it is considered that an ATS based on such an approach is of limited use as the only way to specify IUT generated PDUs is to use the "implicit send" statement. Many users of such an ATS would replace the "implicit send" statements with descriptions of the behaviour at other interfaces.

An ATS based on a multi-party test method is considered to be more useful in that it is closer to how a real test suite would be constructed. Such a test method specifies behaviour at multiple network interfaces. One very important limitation here is that tests are focused on one particular interface. Thus the test system is made up one Main Test Component (MTC) and one or more Parallel Test Components (PTC), see figure 1.

4.2 Conventions for test components and PCOs

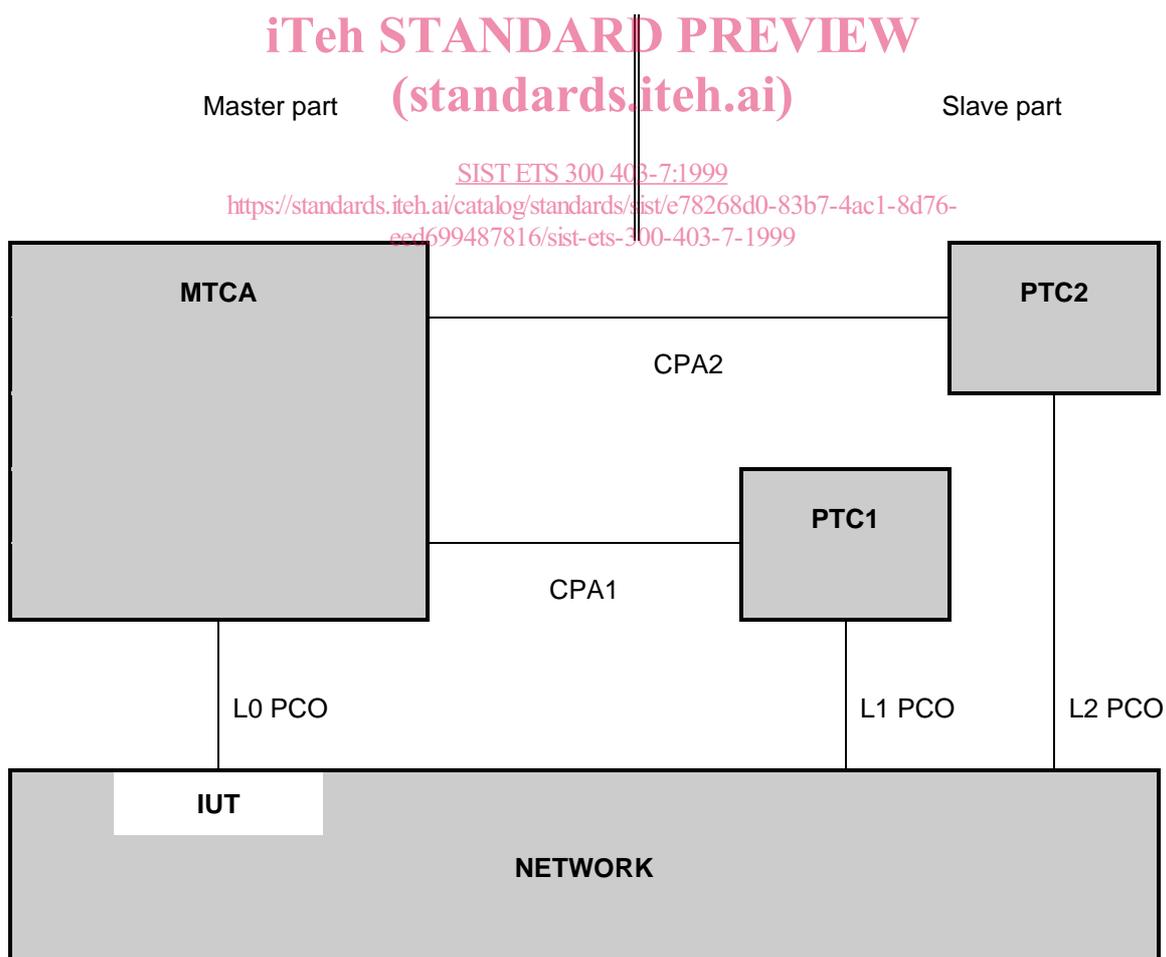


Figure 1: Multi-party test method

In a master/slave arrangement, the MTC is considered to be the master while the PTCs are the slaves. The "slave" testers are only an explicit description of how to deal with the "other" interfaces during the testing process, i.e. "how to make the IUT send the required message".

This means, in particular, that the verdict will only be assigned from the protocol aspects observed on *the* interface under test (i.e. by the "master" tester), as it would be observed by a terminal connected to this interface. A failure in the correlation between the protocol at the different interfaces to which the different testers are connected, i.e. in the mechanism of the functional service itself, will not cause a FAIL verdict. For instance, if the IUT fails to send a message on the tested interface after another interface has received the proper stimulus, the verdict will be INCONCLUSIVE.

The MTC MTCA has two functions in this configuration. Firstly, it has the MTC function of controlling the one or more PTCs. Thus it is responsible for starting the PTCs and afterwards co-ordinates activities by exchanging Co-ordination Messages (CM) with the PTCs. Secondly it is responsible for the behaviour of the Lower Tester (LT) at PCO L0.

A combination of the remote and multi-party test methods is applied. As can be seen from figure 1, several PCOs are used. All PCOs reside at the service access points between layers 2 and 3.

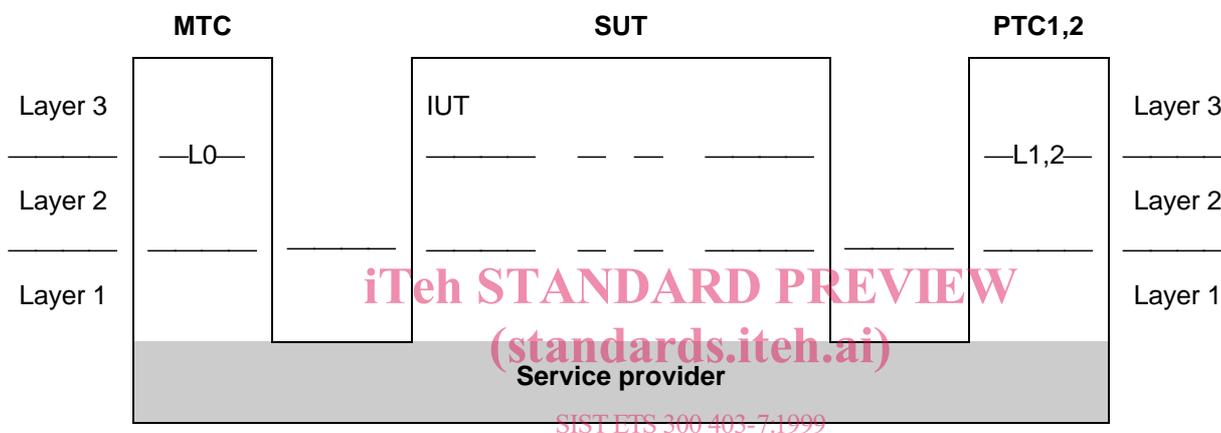


Figure 2: Combination of the remote and multi-party test methods

The MTC PCO is named "L0" ("L" for Lower). The L0 PCO is used to control and observe the behaviour of the IUT and test case verdicts are assigned depending on the behaviour observed at this PCO. The PTCs PTC1, PTC2 etc. use PCOs L1, L2 etc. These PCOs are used to control and, in a limited way, observe the behaviour of the network equipment at interfaces other than the one under test. No verdicts are assigned at these PCOs.

As stated in a previous paragraph, the non-receipt of network generated messages at L0, which are stimulated by events at the L1, L2 etc., will result in INCONCLUSIVE rather than FAIL verdicts being assigned.

PTC2 is only activated in a small set of test cases that test the handling of two calls at one time. In test cases which verify that the IUT rejects invalid or unacceptable SETUP messages, no PTC is activated at all, as these rejection procedures are considered local to the access between IUT and MTC.

The capability of the IUT to send INFORMATION and PROGRESS messages is tested in different call states. Implicit send events have to be used in this small set of test cases, as the sending of those messages cannot be triggered via a PTC. Separate PIXIT questions are asked for each call state, if and how it is possible for the test operator to cause the sending of the messages.

4.3 Conventions for point-to-multipoint configurations

For this group, PTC3 is connected to the same basic access as the MTC. Thus messages that are sent to the MTC via the broadcast data link will be received at PTC3 via PCO L3 as well. Both the MTC and PTC3 will send messages on the same access using the same call reference value. A distinction between the two message flows related to the PCOs L0 and L3 can still be made, as they use different data link entities. This approach, representing a slight modification in the test method, is illustrated in figure 3. This shows that the part of the network considered to be the IUT is connected to both the MTC and PTC3. PTC2 is not used in that configuration.

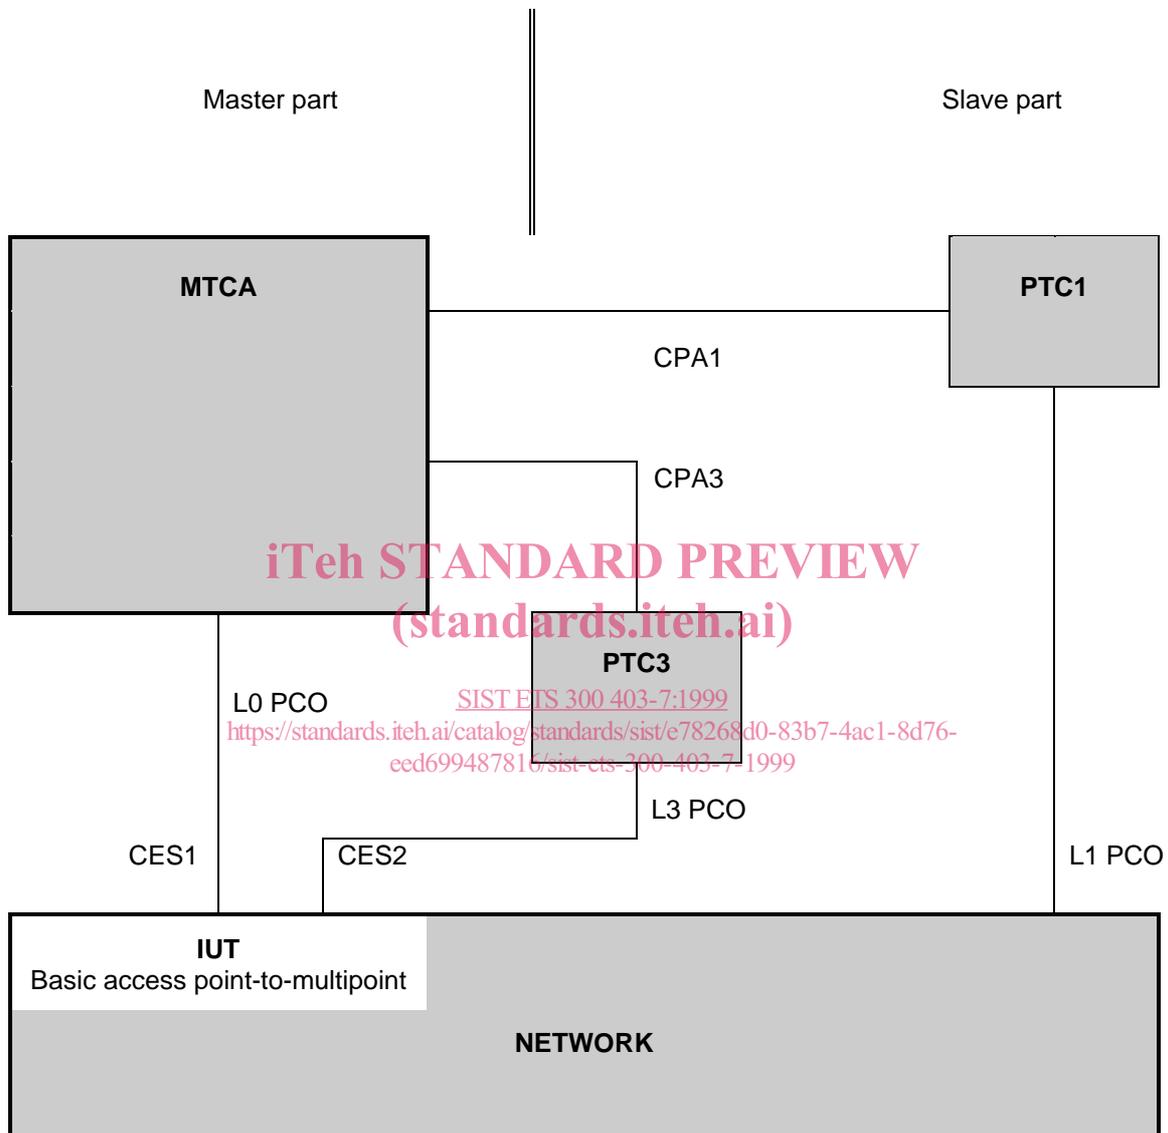


Figure 3: Multi-party test method - modified for point-to-multipoint configurations

5 Untestable test purposes

There are no untestable test purposes associated with this ATS and ATM.