
Metallic materials — Tube — Flanging test

Matériaux métalliques — Tubes — Essai de rabattement de collerette

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 8494:1998](https://standards.iteh.ai/catalog/standards/sist/3deb41d-842d-44f6-b89b-6b935ec65694/iso-8494-1998)

<https://standards.iteh.ai/catalog/standards/sist/3deb41d-842d-44f6-b89b-6b935ec65694/iso-8494-1998>



Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 8494 was prepared by Technical Committee ISO/TC 164, *Mechanical testing of metals*, Subcommittee SC 2, *Ductility testing*.

This second edition cancels and replaces the first edition (ISO 8494:1986), of which it constitutes a technical revision.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO 8494:1998](#)

<https://standards.iteh.ai/catalog/standards/sist/3deb41d-842d-44f6-b89b-6b935ec65694/iso-8494-1998>

© ISO 1998

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization
Case postale 56 • CH-1211 Genève 20 • Switzerland
Internet iso@iso.ch

Printed in Switzerland

Metallic materials — Tube — Flanging test

1 Scope

This International Standard specifies a method for determining the ability of metallic tubes of circular cross-section to undergo plastic deformation during flange formation.

This International Standard is intended for tubes having an outside diameter no greater than 150 mm and a wall thickness no greater than 10 mm, although the range of diameters or wall thickness for which this International Standard is applicable may be more exactly specified in the relevant product standard.

2 Symbols, designations and units

Symbols, designations and units for the flanging test of tubes are given in table 1 and are shown in figure 1.

Table 1

Symbol	Designation	Unit
a^a	Wall thickness of the tube	mm
D	Original outside diameter of the tube	mm
D_u	Maximum outside diameter of the flange	mm
L	Length of the test piece before the test	mm
R	Corner radius of the flanging tool	mm
β	Angle of the conical mandrel	degree

^a The symbol T is also used in steel tube standards.

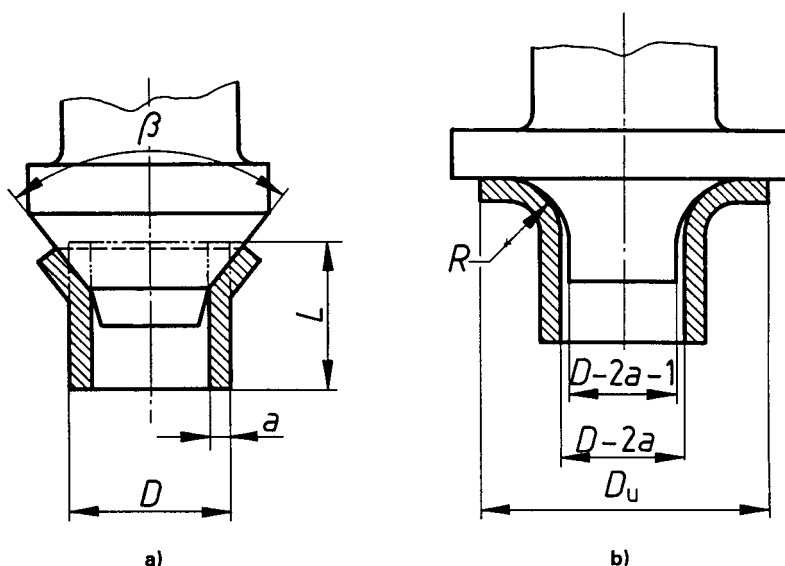


Figure 1

3 Principle

Forming of a flange on the end of a test piece cut from the tube, in a plane perpendicular to the axis of the tube, until the external diameter of the flange reaches the value specified in the relevant product standard.

4 Testing equipment

4.1 Variable-speed press or universal testing machine.

4.2 Forming equipment, made of polished material of sufficient hardness, consisting of

- a) a conical mandrel having a suitable angle (generally 90°);
- b) a flanging tool having
 - a cylindrical end of a diameter 1 mm less than the inside diameter of the tube;
 - a flat concentric portion, perpendicular to the axis of the flanging tool, and having a diameter no less than the required diameter of the flange;
- c) a supporting die, which may be used to support the tube during the formation of the flange.

5 Test piece

5.1 The length of the test piece shall be approximately $1,5 D$. The test piece may be shorter provided that the remaining cylindrical part of the test piece after flanging is at least $0,5 D$.

5.2 Both ends of the test piece shall be in the plane perpendicular to the axis of the tube. The edges of the end to be tested may be rounded by filing or chamfered by other methods.

NOTE — Non-rounded or non-chamfered edges are permissible if the test result meets the test requirements.

5.3 When welded tubes are subjected to the test, the internal welded flash may be removed.

6 Procedure

6.1 In general, the test shall be carried out at ambient temperature within the limits of 10 °C to 35 °C. The test carried out under controlled conditions shall be made at a temperature of $23\text{ °C} \pm 5\text{ °C}$.

6.2 Preform the test piece by forcing the conical mandrel into one end of the test piece until the diameter of the drifted test pieces is such that a flange having the specified diameter can be formed [see figure 1 a)].

6.3 Remove the conical mandrel and, if necessary, replace it with the flanging tool [see figure 1 b)].

6.4 Form the flange by applying axial force to the test piece until the drifted portion has formed a flange of the required diameter perpendicular to the axis of the test piece.

6.5 The conical mandrel may be lubricated. The conical mandrel shall not rotate relative to the test piece during the test.

6.6 In case of dispute, the rate of movement of the forming tools shall not exceed 50 mm/min.

6.7 The diameter of the flange and the radius R shall be as specified in the relevant product standard.

6.8 Interpretation of the flanging test shall be carried out in accordance with the requirements of the relevant product standard. When these requirements are not specified, the test piece shall be considered to have passed the

test if no cracks are visible without the use of magnifying aids. Slight cracking at the edges shall not be considered cause for rejection.

7 Test report

A test report shall be provided when so specified in the relevant product standard. In this case, the test report shall include at least the following information:

- a) reference to this International Standard, i.e. ISO 8494;
- b) identification of the test piece;
- c) dimensions of the test piece;
- d) maximum outside diameter of the expanded part of the test piece, D_u , or relative expansion as a percentage of the original diameter, D ;
- e) corner radius R of the flanging tool, when relevant;
- f) result of the test.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 8494:1998](https://standards.iteh.ai/catalog/standards/sist/3deb41d-842d-44f6-b89b-6b935ec65694/iso-8494-1998)

<https://standards.iteh.ai/catalog/standards/sist/3deb41d-842d-44f6-b89b-6b935ec65694/iso-8494-1998>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 8494:1998

<https://standards.iteh.ai/catalog/standards/sist/3deb41d-842d-44f6-b89b-6b935ec65694/iso-8494-1998>

ICS 77.040

Descriptors: metal products, metal tubes, tests, flanging tests.

Price based on 3 pages
