

---

---

**Flat pallets for intercontinental materials  
handling — Principal dimensions and  
tolerances**

*Palettes plates pour la manutention et le transport dans les échanges  
intercontinentaux — Dimensions principales et tolérances*

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

ISO 6780:2003

<https://standards.iteh.ai/catalog/standards/sist/2fde3b36-e737-472e-b286-1beaa3db666c/iso-6780-2003>



**PDF disclaimer**

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

ISO 6780:2003

<https://standards.iteh.ai/catalog/standards/sist/2fde3b36-e737-472e-b286-1beaa3db666c/iso-6780-2003>

© ISO 2003

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

Page

Foreword .....	iv
Introduction .....	v
1 Scope .....	1
2 Normative references .....	1
3 Terms and definitions .....	1
4 Dimensions .....	3
4.1 Plan dimensions and tolerances .....	3
4.2 Vertical entry clearances for lifting devices .....	3
4.3 Horizontal clearances for lifting devices .....	5
4.4 Dimensions of bottom deck chamfers .....	8
4.5 Dimensions of pallet deck projections .....	8
4.6 Bearing surface of bottom decks .....	8
4.7 Limits of diagonal distortion .....	8
4.8 Flatness .....	8
Annex A (informative) Regional use of intercontinental pallet sizes .....	9
Annex B (normative) Horizontal clearances for pallet trucks and fork-lift trucks .....	10
Bibliography .....	13

[ISO 6780:2003](https://standards.iteh.ai/catalog/standards/sist/2fde3b36-e737-472e-b286-1beaa3db666c/iso-6780-2003)

<https://standards.iteh.ai/catalog/standards/sist/2fde3b36-e737-472e-b286-1beaa3db666c/iso-6780-2003>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 6780 was prepared by Technical Committee ISO/TC 51, *Pallets for unit load method of materials handling*.

This second edition cancels and replaces the first edition (ISO 6780:1988), which has been technically revised, and incorporates ISO 6780:1988/Amd. 1:1994.

This corrected version of ISO 6780:2003 incorporates corrections to Figures 2 d), 2 e), 2 g), 2 h) and B.3.

ISO 6780:2003

<https://standards.iteh.ai/catalog/standards/sist/2fde3b36-e737-472e-b286-1beaa3db666c/iso-6780-2003>

## Introduction

The purpose of this International Standard is to promote distribution efficiency through the use of a limited number of internationally recognized and approved pallet sizes that most countries can adopt. Promotion of these sizes will also help to discourage long-term regional differences within and between international and intercontinental trading nations.

This International Standard is intended to include compatibility between ISO-approved pallet sizes, unit load sizes, materials-handling equipment and transport containers and vehicles. It also provides a presentation of pallet features and includes Asia-Pacific preferred pallet sizes that had been omitted from previous editions.

Although every effort has been made to coordinate overall pallet dimensions specified in this International Standard with the unit load sizes defined in ISO 3676, it is recognized that these pallet sizes are unlikely to cover all requirements because of substantial differences in size, shape and density of products, variations in handling devices, as well as regional habits and practices.

## iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 6780:2003

<https://standards.iteh.ai/catalog/standards/sist/2fde3b36-e737-472e-b286-1beaa3db666c/iso-6780-2003>

## **iTeh STANDARD PREVIEW** **(standards.iteh.ai)**

ISO 6780:2003

<https://standards.iteh.ai/catalog/standards/sist/2fde3b36-e737-472e-b286-1beaa3db666c/iso-6780-2003>

# Flat pallets for intercontinental materials handling — Principal dimensions and tolerances

## 1 Scope

This International Standard specifies the principal dimensions and tolerances for new single-deck and double-deck, reversible and non-reversible flat pallets, of all entry types and made of any material, related to their transportation and handling by pallet trucks, fork-lift trucks and other appropriate equipment.

The requirements for features such as openings, clearances, chamfers and wings that are required for efficient handling are also included.

The applicability of this International Standard to reversible pallets can be affected by their use in field conditions.

## 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 445:1996, *Pallets for materials handling — Vocabulary*  
<https://standards.iteh.ai/catalog/standards/sist/2fde3b36-e737-472e-b286-1bcaad5db66c/iso-6780-2003>

ISO 509, *Pallet trucks — Principal dimensions*

## 3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 445 and ISO 509 and the following apply.

### 3.1

#### **pallet size**

nominal plan view dimensions of pallet length and pallet width

### 3.2

#### **pallet length**

*L*

deck dimension in the direction of stringers or stringerboards

NOTE 1 If these members are not present, the length is the longer deck dimension.

NOTE 2 Pallet length is expressed first, followed by pallet width.

### 3.3

#### **pallet width**

*W*

deck dimension at right angles to the length

### 3.4

#### **pallet truck**

industrial truck, equipped with two fork arms extending over the structure of the frame containing trail wheels (single or tandem) located near the fork arm tips, which is designed to lift the pallet only sufficiently to permit horizontal movement

NOTE The truck may be a hand pallet truck or electrically operated.

### 3.5

#### **fork-lift truck**

industrial truck, equipped with two fork arms not extending over the frame structure when handling pallets, attached through the carriage to the mast of the truck, which is designed to lift the load permitting stacking and racking as well as horizontal movement

### 3.6

#### **automatic handling system**

computer directed and controlled equipment for the storage and movement of material that does not require direct human operators

### 3.7

#### **end**

vertical face of the pallet which corresponds to the width

### 3.8

#### **side**

vertical face of the pallet which corresponds to the length

### 3.9

#### **four-way pallet**

pallet permitting the entry of the fork arms of fork-lift trucks, pallet trucks and pallet stackers from all four directions

NOTE Adapted from ISO 445:1996, definition 3.4.

### 3.10

#### **two-way pallet**

pallet permitting the entry of the fork arms of fork-lift trucks, pallet trucks and pallet stackers from two opposite directions only

NOTE Adapted from ISO 445:1996, definition 3.3.

### 3.11

#### **partial four-way pallet**

pallet permitting four-way entry of the fork arms of fork-lift trucks and two-way entry of the fork arms of pallet trucks and pallet stackers

NOTE Adapted from ISO 445:1996, definition 3.5.

### 3.12

#### **through transit**

pallet usage cycle which anticipates that the full range of mechanical handling equipment may be applied at some stage of the journey

### 3.13

#### **pallet stacker**

industrial truck, equipped with two fork arms extending over the structure of the frame containing trail wheels, permitting horizontal movement of the pallet and stacking of the pallet on the free entry side



## 4 Dimensions

### 4.1 Plan dimensions and tolerances

#### 4.1.1 Rectangular plan dimensions

The rectangular plan dimensions of pallets conforming to this International Standard shall be as indicated in Table 1. Regional use of these pallet sizes is given in Annex A.

**Table 1 — Rectangular plan dimension sizes**

Metric mm	Imperial in
1 200 × 800	47,2 × 31,5
1 200 × 1 000	47,2 × 39,4
1 219 × 1 016	48 × 40
NOTE 1 The above plan dimensions describe pallet sizes only. They do not suggest or imply preferred pallet lengths or preferred pallet widths as defined in ISO 445.	
NOTE 2 With sawn timber, the dimensions stated should be associated with a specified moisture content. For plastics, dimensions should be measured at a temperature of 23 °C ± 2 °C.	

#### 4.1.2 Square plan dimensions

The square plan dimensions of pallets conforming to this International Standard shall be as indicated in Table 2. Regional use of these pallet sizes is given in Annex A.

**Table 2 — Square plan dimension sizes**

Metric mm	Imperial in
1 067 × 1 067	42 × 42
1 100 × 1 100	43,3 × 43,3
1 140 × 1 140	44,9 × 44,9
NOTE The Notes given in Table 1 apply.	

#### 4.1.3 Tolerances

Manufacturing tolerances on the plan dimensions given in 4.1.1 and 4.1.2 shall be  $^{+3}_{-6}$  mm.

### 4.2 Vertical entry clearances for lifting devices


#### 4.2.1 Pallet trucks

The vertical entry clearance  $H_1$  under the top deck for the entry of fork arms of pallet trucks, as shown in Figure 1, shall not be less than those values listed in Table 3. The distance from the top of the opening to the bottom surface of the pallet,  $H_2$  as shown in Figure 1, shall not exceed 156 mm.

The vertical clearance for some pallet designs are shown in Figure 1.

Table 3 — Minimum vertical entry clearance for pallets in use with pallet trucks

Pallet	Minimum vertical entry clearance mm
High profile	100
Standard profile	95
Low profile	89

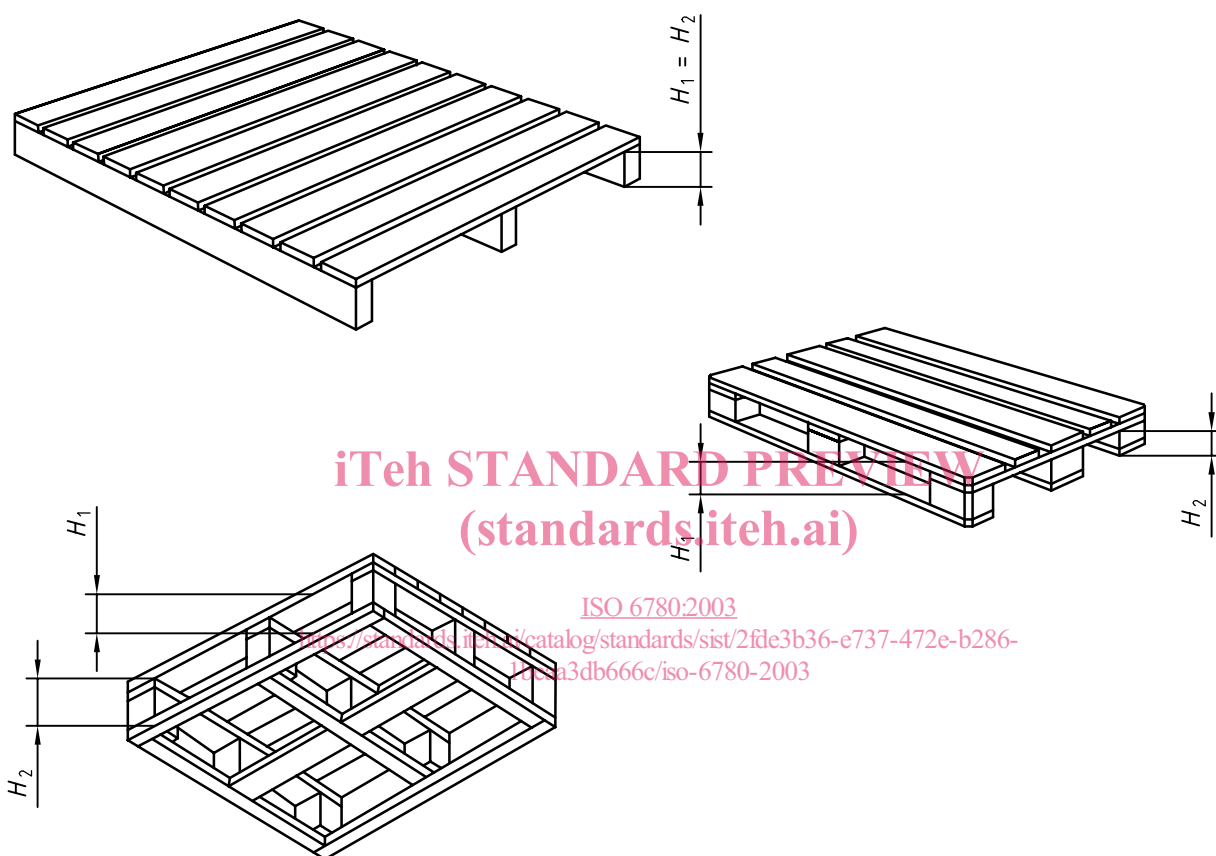

$H_1$  is the vertical entry clearance.

$H_2$  is the distance from the top of the opening to the bottom surface of the pallet.

Figure 1 — Vertical entry clearance for lifting devices for two-way and four-way entry pallets

#### 4.2.2 Fork-lift trucks

The vertical clearance for the entry of fork arms of fork-lift trucks shall not be less than 50 mm.

The minimum clearance of 50 mm may not be sufficient in certain European countries where 55 mm is needed.

#### 4.2.3 Other types of handling/lifting devices

For other types of handling/lifting devices, the dimensions given in 4.2.1 apply. The minimum clearance for pallets used in automatic handling systems is recommended as 100 mm.

### 4.3 Horizontal clearances for lifting devices

#### 4.3.1 End and side entry

Horizontal clearances for the entry of pallet trucks into the ends of two-way and partial four-way pallets and into the ends and sides of four-way pallets shall conform to those dimensions specified in Table 4 and shown in Figure 2 and Annex B.

When the distance between fork arms is greater than 180 mm, as in ISO 509,  $L_1$  and  $W_1$  shall be at least 20 mm less than the distance between the fork arms.

**Table 4 — Horizontal clearances for lifting devices**

Dimensions in millimetres

Nominal dimension of pallet $L$ or $W$	Entries and openings	
	$L_1$ max. and $W_1$ max.	$L_2$ min. and $W_2$ min.
800	160	580
$\geq 1\ 000$	160	710

#### 4.3.2 Horizontal clearance of entries and openings for side entry into partial four-way pallets

Horizontal clearances for the entry of pallet trucks into the sides of partial four-way pallets shall conform to those dimensions specified in Table 5 and shown in Figure 3.

NOTE The dimension  $L_3$  as illustrated in Figure 3 can be as great as 200 mm in partial four-way entry pallets designed to be handled by fork-lift trucks.

ISO 6780:2003

**Table 5 — Horizontal clearance of entries and openings for side entry into partial four-way pallets**

Dimensions in millimetres

Pallet length $L$	Entries and openings					
	$L_5$		$L_4$		$L_3$	
	min.	max.	min. <sup>a</sup>	max.	min.	max.
800 <sup>b</sup>	90	140	200	210	100	220
1 000	90	155	200	255	180	420
1 016	90	155	200	255	196	436
1 067	90	155	200	255	247	487
1 100	90	155	200	255	280	520
1 140	90	155	200	255	320	560
1 200	90	155	200	255	380	620
1 219	90	155	200	255	399	639
<sup>a</sup> Pallets with these minimum dimensions cannot be handled by pallet trucks equipped with tandem trail wheels.						
<sup>b</sup> Pallets of this length cannot be handled by pallet trucks equipped with tandem trail wheels.						