
**Machine tools — Test conditions for
external cylindrical centreless grinding
machines — Testing of the accuracy**

*Conditions d'essai des machines à rectifier les surfaces extérieures
sans centres — Contrôle de la précision*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 3875:2004](https://standards.iteh.ai/catalog/standards/sist/1018069c-aa82-4f45-8974-3a66ca32b056/iso-3875-2004)

<https://standards.iteh.ai/catalog/standards/sist/1018069c-aa82-4f45-8974-3a66ca32b056/iso-3875-2004>



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 3875:2004](#)

<https://standards.iteh.ai/catalog/standards/sist/1018069c-aa82-4f45-8974-3a66ca32b056/iso-3875-2004>

© ISO 2004

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
1 Scope	1
2 Normative references	1
3 Terminology and design of axes	1
4 Preliminary remarks	3
4.1 Measuring units	3
4.2 Reference to ISO 230-1 and ISO 230-2	3
4.3 Testing sequence	3
4.4 Tests to be performed	3
4.5 Measuring instruments	3
4.6 Machining tests	3
4.7 Minimum tolerance	3
5 Geometric tests	4
5.1 Grinding wheel dresser	4
5.2 Regulating wheel dresser	5
5.3 Work support blade location	6
5.4 Grinding wheel spindle	7
5.5 Regulating wheel spindle	8
6 Machining tests	9
7 Accuracy and repeatability of positioning	11
7.1 Positioning of manual or automatic (but not numerically controlled) linear axes	11
7.2 Positioning of numerically controlled linear axes	12
Bibliography	15

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 3875 was prepared by Technical Committee ISO/TC 39, *Machine tools*, Subcommittee SC 2, *Test conditions for metal cutting machine tools*.

This third edition cancels and replaces the second edition (ISO 3875:1990), which has been technically revised.

iTeh STANDARD PREVIEW
(standards.iteh.ai)
ISO 3875:2004
<https://standards.iteh.ai/catalog/standards/sist/1018069c-aa82-4f45-8974-3a66ca32b056/iso-3875-2004>

Machine tools — Test conditions for external cylindrical centreless grinding machines — Testing of the accuracy

1 Scope

The International Standard specifies, with reference to ISO 230-1 and 230-2, geometric tests, machining tests and tests for accuracy and repeatability of positioning axes on general purpose and normal accuracy external cylindrical centreless grinding machines. It also specifies the applicable tolerances corresponding to the above-mentioned tests.

This International Standard deals only with the verification of accuracy of the machine. It does not apply to the testing of the machine operation (vibrations, abnormal noise, stick-slip motion of components, etc.) nor to machine characteristics (such as speeds, feeds, etc.), which should generally be checked before testing of machine accuracy.

This International Standard provides the terminology used for the principal components of the machine and the designation of the axes with reference to ISO 841.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 230-1:1996, *Test code for machine tools — Part 1: Geometric accuracy of machines operating under no-load or finishing conditions*

ISO 230-2:1997, *Test code for machine tools — Part 2: Determination of accuracy and repeatability of positioning numerically controlled axes*

3 Terminology and design of axes

See Figure 1 and Table 1.

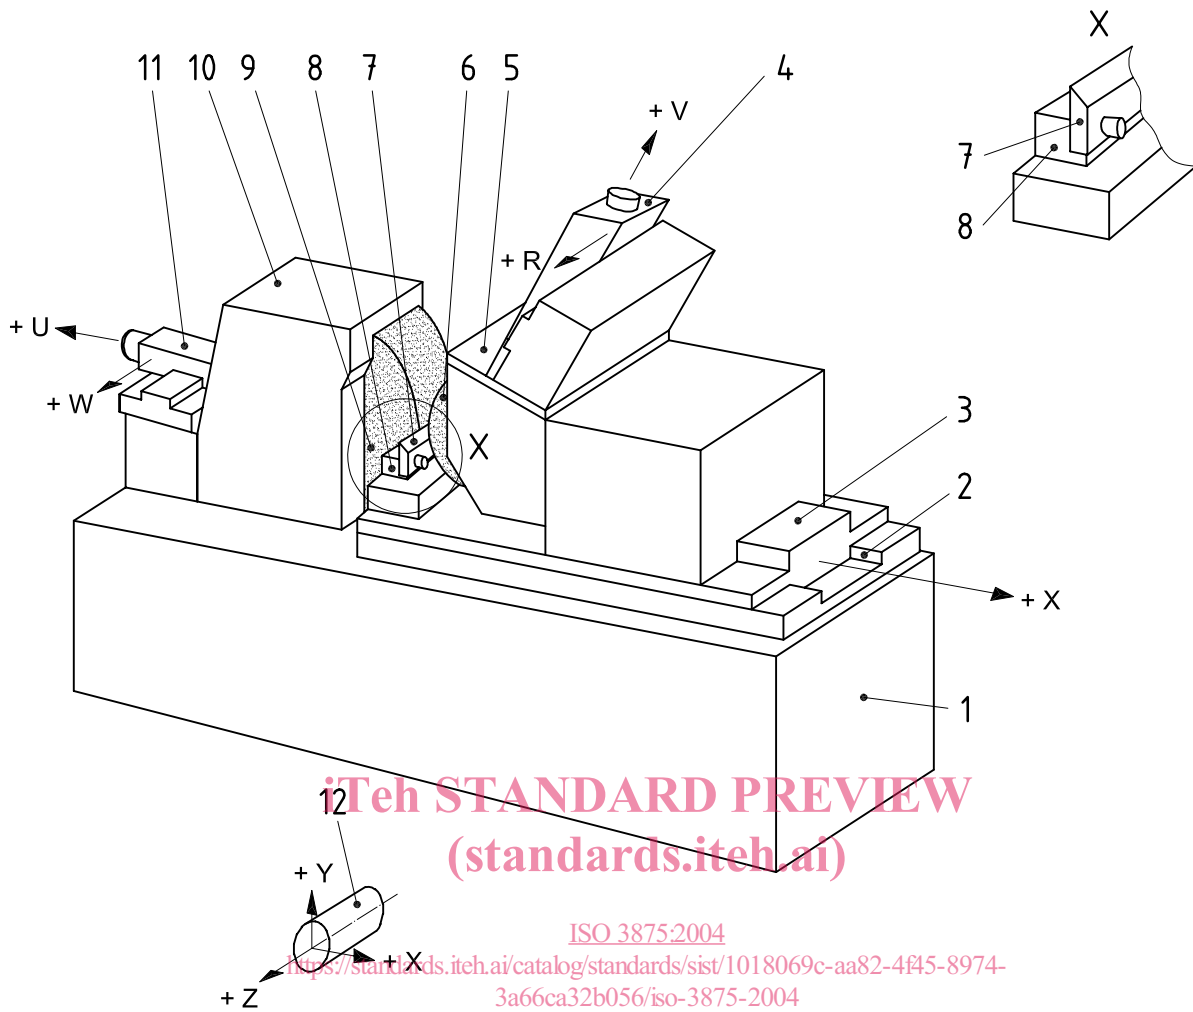


Figure 1 — Example of a centreless grinding machine

Table 1 — Terminology

Ref.	English	French	German
1	Bed	Banc	Bett
2	Saddle guideway	Guidage de chariot	Schlittenführung
3	Saddle	Chariot	Schlitten
4	Regulating wheel dresser	Dispositif de dressage pour meule d'entraînement	Regelscheibenabrichter
5	Regulating wheelhead	Poupée porte-meule d'entraînement	Regelscheibenspindelstock
6	Regulating wheel	Meule d'entraînement	Regelscheibe
7	Work support blade	Lame support de pièce	Werkstückauflagenstütze
8	Work rest	Appui porte-pièce	Werkstückauflage
9	Grinding wheel	Meule de travail	Schleifscheibe
10	Grinding wheelhead	Poupée porte-meule de travail	Schleifscheibenspindelstock
11	Grinding wheel dresser	Dispositif de dressage pour meule de travail	Schleifscheibenabrichter
12	Workpiece	Pièce	Werkstück

NOTE In addition to the terms used in the two official ISO languages (English and French) this International Standard gives the equivalent terms in German; these terms are published under the responsibility of the member body of Germany (DIN). However, only terms and definitions given in the official languages can be considered as ISO terms and definitions.

4 Preliminary remarks

4.1 Measuring units

In this International Standard, all linear dimensions, deviations and corresponding tolerances are expressed in millimetres; angular dimensions are expressed in degrees, and angular deviations and the corresponding tolerances are expressed in ratios, but in some cases microradians or arcseconds may be used for clarification purposes. The equivalence of the following expressions should always be kept in mind:

$$0,010/1000 = 10 \mu\text{rad} \approx 2''$$

4.2 Reference to ISO 230-1 and ISO 230-2

To apply this International Standard, reference shall be made to ISO 230-1 and ISO 230-2, especially for the installation of the machine before testing, the warming up of spindles and other moving components, description of measuring methods and recommended accuracy of testing equipment.

In the "Observations" block of the tests described in Clauses 5 to 7, the instructions are preceded by a reference to the corresponding clause in ISO 230-1 and ISO 230-2 in cases where the test concerned is in compliance with the specifications of ISO 230-1 and ISO 230-2.

4.3 Testing sequence

The sequence in which the tests are presented in this International Standard in no way defines the practical order of testing. In order to make the mounting of instruments or gauging easier, tests may be performed in any order.

4.4 Tests to be performed

When testing a machine, it is not always necessary nor possible to carry out all the tests described in this International Standard. When the tests are required for acceptance purposes, it is up to the user to choose, in agreement with the supplier/manufacturer, those tests relating to the components and/or the properties of the machine which are of interest. These tests are to be clearly stated when ordering a machine. The mere references to this International Standard for the acceptance tests, without specifying the tests to be carried out, and without agreement on the relevant expenses, cannot be considered as binding for any contracting party.

4.5 Measuring instruments

The measuring instruments indicated in the tests described in Clauses 5 to 7 are examples only. Other instruments measuring the same quantities and having at least the same accuracy may be used. Dial gauges shall have a resolution of 0,001 mm.

4.6 Machining tests

Machining tests shall be made with finishing cuts only. Roughing cuts shall be avoided since they are liable to generate appreciable cutting forces.

4.7 Minimum tolerance

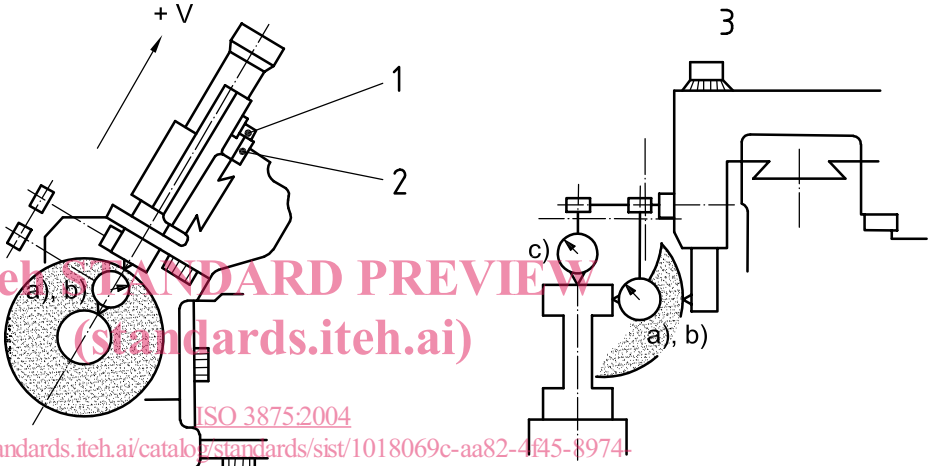
When establishing the tolerance for a measuring length different from that given in this International Standard (see 2.311 of ISO 230-1:1996), it shall be taken into consideration that the minimum value of tolerance is 0,002 mm.

5 Geometric tests

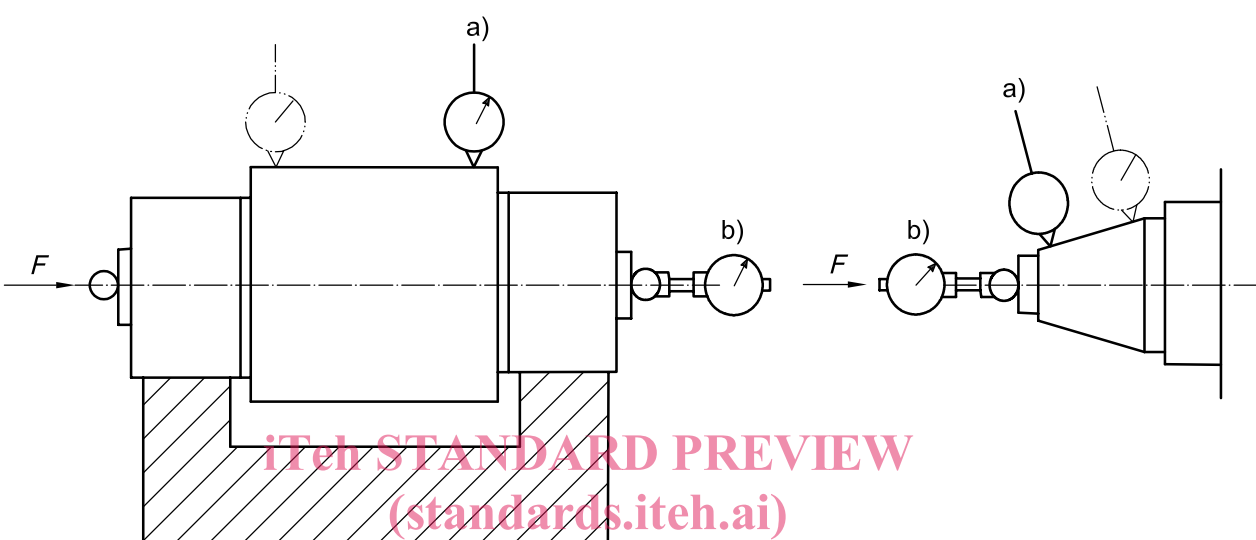
5.1 Grinding wheel dresser

<p>Object</p> <p>Checking of the dressing tool movement:</p> <p>a) straightness in the plane of action;</p> <p>b) parallelism to the grinding wheel spindle axis in a plane perpendicular to the plane of action;</p> <p>c) parallelism to the grinding wheel spindle axis U in the plane of action.</p> <p>NOTE Test c) applies only for machines with a fixed dresser and non-adjustable template.</p>	<p>G1</p>
<p>Diagram</p> <p>Key</p> <p>1 copying pin</p> <p>2 master template</p>	
<p>Tolerance</p> <p>For a measuring length of 300</p> <p>a) 0,005 b) 0,10 c) 0,03</p>	<p>Measured deviation</p> <p>a)</p> <p>b)</p> <p>c)</p>
<p>Measuring instruments</p> <p>Dial gauge, test mandrel and master template</p> <p>Observations and references to ISO 230-1:1996 5.232.1 , 5.233.1 and 5.422.3</p> <p>The dial gauges shall be mounted on the dressing tool holder with their styli contacting the test mandrel, which is mounted on the grinding wheel spindle, in the plane of action and in a plane perpendicular to the plane of action.</p> <p>The dressing slide shall be moved in W-axis motion at a normal working feed. The measuring length shall be equal to the maximum width of the grinding wheel.</p> <p>If the machine is provided with a copying mechanism, the copying pin shall be engaged with a normal working pressure (stated by the manufacturer) against the master template.</p> <p>Indicated tolerance relates to the position of the diamond point.</p> <p>The measuring method gives the sum of errors from the dressing mechanism.</p>	

5.2 Regulating wheel dresser

<p>Object</p> <p>Checking of the dressing tool movement:</p> <p>a) straightness in the plane of action;</p> <p>b) parallelism to the regulating wheel spindle axis in the plane of action;</p> <p>c) parallelism to the work support plane.</p> <p>NOTE 1 Test b) refers only to machines with a fixed dresser and non-adjustable template.</p> <p>NOTE 2 Test c) refers only to machines with a non-gradient slide in the vertical plane.</p>		<p>G2</p>
<p>Diagram</p>  <p>Key</p> <p>1 copying pin</p> <p>2 master template</p> <p>3 alternative type of machine</p> <p>ISO 3875:2004 https://standards.iteh.ai/catalog/standards/sist/1018069c-aa82-4445-8974-3a66ca32b056/iso-3875-2004</p>		
<p>Tolerance</p> <p>For a measuring length of 300</p> <p>a) 0,005 b) 0,03 c) 0,10</p>	<p>Measured deviation</p> <p>a)</p> <p>b)</p> <p>c)</p>	
<p>Measuring instruments</p> <p>Dial gauge, test mandrel, master template and test straightedge</p>		
<p>Observations and references to ISO 230-1:1996 5.232.1, 5.233.1 and 5.422.3</p> <p>The dial gauges shall be mounted on the dressing tool holder with their styli contacting the test mandrel or straightedge, which is mounted on the regulating wheel spindle, in the plane of action and in a plane perpendicular to the plane of action.</p> <p>The dressing slide shall be moved at a normal working feed. The measuring length shall be equal to the maximum width of the regulating wheel.</p> <p>If the machine is provided with a copying mechanism, the copying pin shall be engaged with a normal working pressure (stated by the manufacturer) against the master template.</p> <p>The indicated tolerance relates to the position of the diamond point. The measuring method gives the sum of errors from the dressing mechanism.</p>		

5.4 Grinding wheel spindle

Object Checking of the grinding wheel spindle: a) run-out (at the wheel mounting diameter/taper); b) periodic axial slip.	G4
Diagram  <p style="text-align: center; color: red; font-weight: bold;">iTECH STANDARD PREVIEW (standards.iteh.ai)</p> <p style="text-align: center; color: red; font-size: small;">ISO 3875:2004 https://standards.iteh.ai/catalog/standards/sist/1018069c-aa82-4f45-8774-3a66ca32b056/iso-3875-2004</p>	
Tolerance a) 0,005 for the two locations touched b) 0,008	Measured deviation a) b)
Measuring instruments Dial gauge	
Observations and references to ISO 230-1:1996 a) 5.612.2 The stylus of the dial gauge shall be set normal to the surface to be checked. The measurement of run-out shall be carried out at both ends of the conical or cylindrical grinding wheel mounting surface. b) 5.622.1 and 5.622.2 The value and the direction of the axial force F to be applied shall be specified by the supplier/manufacturer. When preloaded bearings are used, there is no need to apply the force F .	