

SLOVENSKI STANDARD SIST EN 15478:2009

01-junij-2009

BUXca Yý U. SIST-TS CEN/TS 15478:2006

; bc1\d'\'8cc Yj\ub1\d'\'Y\ChbY[\UXi\\\\j]_\Uj\gY\b]b]

Fertilizers - Determination of total nitrogen in urea

Düngemittel - Bestimmung von Gesamtstickstoff in Harnstoff

iTeh STANDARD PREVIEW
Engrais - Détermination de l'azote total dans l'urée
(standards.iteh.ai)

Ta slovenski standard je istoveten z:STENEN/15478:2009

https://standards.iteh.ai/catalog/standards/sist/fb5ec600-3125-4029-a1c2-

ICS:

65.080 Gnojila **Fertilizers**

SIST EN 15478:2009 en,fr,de **SIST EN 15478:2009**

iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST EN 15478:2009

https://standards.iteh.ai/catalog/standards/sist/fb5ec600-3125-4029-a1c2-ce1c68d4a8e8/sist-en-15478-2009

EUROPEAN STANDARD NORME EUROPÉENNE EUROPÄISCHE NORM EN 15478

January 2009

ICS 65.080

Supersedes CEN/TS 15478:2006

English Version

Fertilizers - Determination of total nitrogen in urea

Engrais - Détermination de l'azote total dans l'urée

Düngemittel - Bestimmung von Gesamtstickstoff in Harnstoff

This European Standard was approved by CEN on 30 November 2008.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

SIST EN 15478:2009

https://standards.iteh.ai/catalog/standards/sist/fb5ec600-3125-4029-a1c2-ce1c68d4a8e8/sist-en-15478-2009



EUROPEAN COMMITTEE FOR STANDARDIZATION COMITÉ EUROPÉEN DE NORMALISATION EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

Foreword		Page
		3
1	Scope	4
2	Normative references	4
3	Terms and definitions	4
4	Principle	4
5	Reagents	4
6	Apparatus	5
7	Sampling and sample preparation	10
8	Procedure	10
9	Calculation and expression of the result	11
10	Precision	11
11	Test report	12
Anne	ex A (informative) Results of the inter-laboratory tests D. P.R.E.V.E.W.	13
Bibliography (standards.iteh.ai)		14

SIST EN 15478:2009

https://standards.iteh.ai/catalog/standards/sist/fb5ec600-3125-4029-a1c2-ce1c68d4a8e8/sist-en-15478-2009

Foreword

This document (EN 15478:2009) has been prepared by Technical Committee CEN/TC 260 "Fertilizers and liming materials", the secretariat of which is held by DIN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by July 2009, and conflicting national standards shall be withdrawn at the latest by July 2009.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

This document supersedes CEN/TS 15478:2006.

This document has been prepared under a mandate given to CEN by the European Commission and the European Free Trade Association.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

(standards.iteh.ai)

<u>SIST EN 15478:2009</u> https://standards.iteh.ai/catalog/standards/sist/fb5ec600-3125-4029-a1c2-ce1c68d4a8e8/sist-en-15478-2009

1 Scope

This European Standard specifies a method for the determination of total nitrogen in urea. This method is applied exclusively to urea fertilizers which are nitrate free.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 1482-2, Fertilizers and liming materials — Sampling and sample preparation — Part 2: Sample preparation

EN 12944-1:1999, Fertilizers and liming materials and soil improvers — Vocabulary — Part 1: General terms

EN 12944-2:1999, Fertilizers and liming materials and soil improvers — Vocabulary — Part 2: Terms relating to fertilizers

EN ISO 3696:1995, Water for analytical laboratory use — Specification and test methods (ISO 3696:1987)

iTeh STANDARD PREVIEW

3 Terms and definitions (standards.iteh.ai)

For the purposes of this document, the terms and definitions given in EN 12944-1:1999 and EN 12944-2:1999 apply.

https://standards.iteh.ai/catalog/standards/sist/fb5ec600-3125-4029-a1c2-

ce1c68d4a8e8/sist-en-15478-2009

4 Principle

Urea is transformed quantitatively into ammonia by boiling in the presence of sulfuric acid. The ammonia thus obtained is distilled from an alkaline medium, the distillate being collected in an excess of standard sulfuric acid. The excess acid is titrated by means of a standard alkaline solution.

5 Reagents

5.1 General

Use only reagents of recognized analytical grade and distilled or demineralized water, free from carbon dioxide and all nitrogenous compounds (grade 3 according to EN ISO 3696:1995).

5.2 Kjeldahl tablets,

5 g/tablet containing 100 parts K₂SO₄ to 1 part selenium.

- **5.3** Sulfuric acid, concentrated ($\rho_{20} = 1.84 \text{ g/ml}$).
- **5.4 Sodium hydroxide solution**, approximately NaOH 500 g/l.
- **5.5** Sulfuric acid, c = 0.05 mol/l, to use for the blank test.
- **5.6** Sodium or potassium hydroxide solution, carbonate free, c = 0,1 mol/l, to use for the blank test.
- **5.7** Sulfuric acid, c = 0.5 mol/l.
- **5.8 Sodium or potassium hydroxide solution**, carbonate free, c = 1.0 mol/l.
- 5.9 Indicator solutions

5.9.1 Mixed indicator

Solution A: Dissolve 1 g of methyl red in 37 ml of 0,1 mol/l sodium hydroxide solution and make up to one litre with water.

Solution B: Dissolve 1 g of methylene blue in water and make up to one litre.

Mix one volume of A with two volumes of B.

This indicator is violet in an acid solution, grey in a neutral solution and green in an alkaline solution; use 0,5 ml (10 drops). (standards.iteh.ai)

5.9.2 Methyl red indicator solution

SIST EN 15478:2009

Dissolve 0,1 g of methyl red in 50 ml of 95 % ethanol and make up to 100 ml with water. Filter if necessary. This indicator (4 or 5 drops) may be used instead of the preceding one. This indicator is red in acid solution and yellow in alkaline solution.

- **5.10** Anti-bump granules, for example pumice stone, washed in hydrochloric acid and calcined.
- **5.11 Urea**, p. a.

6 Apparatus


6.1 Distillation apparatus

Consisting of a round-bottomed flask of suitable capacity connected to a condenser by means of a splash head. The equipment is made of borosilicate glass.

NOTE The different types of equipment recommended for this determination are reproduced showing all the features of construction in Figures 1, 2, 3, and 4.

Automatic distillation apparatus may be used as well provided that the results are statistically equivalent.


Dimensions in millimetres

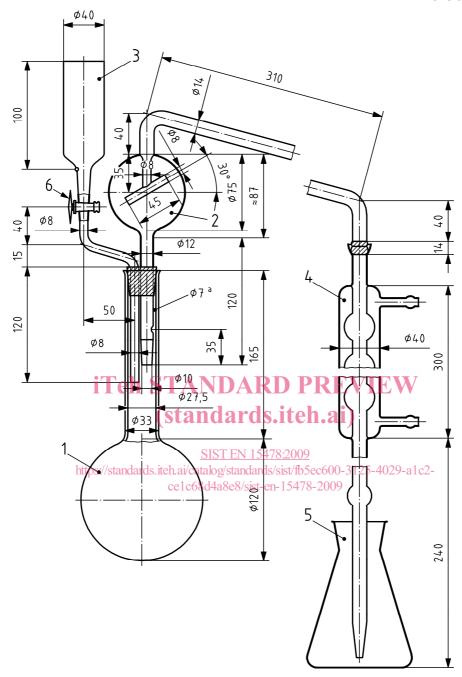

Key

- 1 round-bottomed, long-necked flask of 1 000 ml capacity
- 2 distillation tube with a splash head, connected to the condenser by means of a spherical joint (No 18) (the spherical joint for the connection to the condenser may be replaced by an appropriate rubber connection)
- 3 funnel with a polytetrafluoroethylene (PTFE) tap (6) for the addition of sodium hydroxide
- 4 six-bulb condenser with spherical joint (No 18) at the entrance, and joined at the issue to a glass extension tube by means of a small rubber connection (when the connection to the distillation tube is effected by means of a rubber tube, the spherical joint may be replaced by a suitable rubber bung)
- 5 500 ml flask in which the distillate is collected
- 6 PTFE-tap (the tap may likewise be replaced by a rubber connection with a clip)

Figure 1 — Distillation apparatus 1

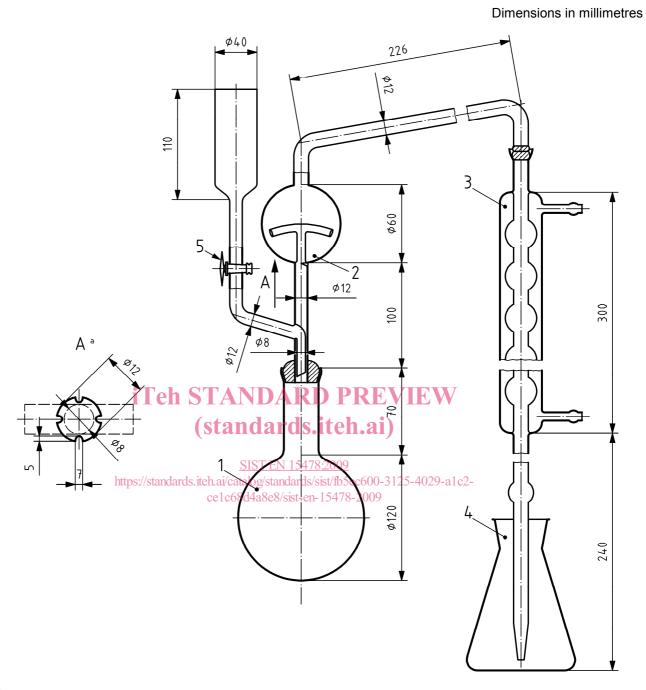

Key

- 1 round-bottomed, short-necked flask of 1 000 ml capacity with a spherical joint (No 35)
- 2 distillation tube with a splash head, equipped with a spherical joint (No 35) at the entrance and a spherical joint (No 18) at the issue, connected at the side to a funnel with a polytetrafluoroethylene (PTFE) tap (6) for the addition of sodium hydroxide
- 3 six-bulb condenser with a spherical joint (No 18) at the entrance and joined at the issue to a glass extension tube by means of a small rubber connection
- 4 500 ml flask in which the distillate is collected
- 5 PTFE-tap
- a enlarged description

Figure 2 — Distillation apparatus 2