



SLOVENSKI STANDARD SIST EN 2997-013:2009

01-maj-2009

5 YfcbUj h_U! ?cbY_lcf jZY_Y_hf] b]žc_fc[`]ždf]_`4 Yb]n'bUj c'ba `cVfc _ca ž
cXdcfb]U]bYcXdcfb]dfc]c[b' žg'ghUbc'XYcj bc'hYa dYfUi fc'a YX'Ě*) `š7 `]b%+)
š7 žghUbc`&\$ \$ š7 žbUj]y'c`&* \$ š7 `!\$% "XY.`HYgb]_UC`nUdf]hfX]Hj `n`Ybc`i`_b'c`!
GHbXUF'X`nUdfc]nj cX

Aerospace series - Connectors, electrical, circular, coupled by threaded ring, fire-resistant or non fire-resistant, operating temperatures - 65 °C to 175 °C continuous, 200 °C continuous, 260 °C peak - Part 013: O-ring seal for jam-nut receptacles - Product standard

ITeH STANDARD PREVIEW
(standards.iteh.ai)

Luft- und Raumfahrt - Elektrische Rundsteckverbinder mit Schraubkupplung, feuerbeständig oder nicht feuerbeständig, Betriebstemperaturen – 65 °C bis 175 °C konstant, 200 °C konstant, 260 °C Spitze - Teil 013: Dichtring für festen Steckverbinder mit Mutterbefestigung - Produktnorm

Série aérospatiale - Connecteurs électriques circulaires à accouplement par bague filetée, résistant au feu ou non, températures d'utilisation - 65 °C à 175 °C continu, 200 °C continu, 260 °C en pointe - Partie 013: Joint torique pour embase à fixation par écrou - Norme de produit

Ta slovenski standard je istoveten z: EN 2997-013:2009

ICS:

49.060 Š^æ\ æš Ą^•[|b\ æ Aerospace electric
^|\ dā } æ] !^ { æš Ąã c { ã equipment and systems

SIST EN 2997-013:2009 en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 2997-013:2009

<https://standards.iteh.ai/catalog/standards/sist/a9cba56f-bcf8-4ca9-be31-a4c129adbe1f/sist-en-2997-013-2009>

EUROPEAN STANDARD

EN 2997-013

NORME EUROPÉENNE

EUROPÄISCHE NORM

February 2009

ICS 49.060

English Version

Aerospace series - Connectors, electrical, circular, coupled by threaded ring, fire-resistant or non fire-resistant, operating temperatures - 65 °C to 175 °C continuous, 200 °C continuous, 260 °C peak - Part 013: O-ring seal for jam-nut receptacles - Product standard

Série aérospatiale - Connecteurs électriques circulaires à accouplement par bague fileté, résistant au feu ou non, températures d'utilisation - 65 °C à 175 °C continu, 200 °C continu, 260 °C en pointe - Partie 013: Joint torique pour embase à fixation par écrou - Norme de produit

Luft- und Raumfahrt - Elektrische Rundsteckverbinder mit Schraubkupplung, feuerbeständig oder nicht feuerbeständig, Betriebstemperaturen - 65 °C bis 175 °C konstant, 200 °C konstant, 260 °C Spitze - Teil 013: Dichtring für festen Steckverbinder mit Mutterbefestigung - Produktnorm

iTeh STANDARD PREVIEW
(standards.iteh.ai)

This European Standard was approved by CEN on 4 July 2008.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents

Page

Foreword.....	3
1 Scope	4
2 Normative references	4
3 Terms and definitions	4
4 Required characteristics	4
5 Designation	6
6 Marking	6
7 Technical specification	6

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 2997-013:2009](https://standards.iteh.ai/catalog/standards/sist/a9cba56f-bcfe-4ca9-be31-a4c129adbe1f/sist-en-2997-013-2009)

<https://standards.iteh.ai/catalog/standards/sist/a9cba56f-bcfe-4ca9-be31-a4c129adbe1f/sist-en-2997-013-2009>

Foreword

This document (EN 2997-013:2009) has been prepared by the Aerospace and Defence Industries Association of Europe - Standardization (ASD-STAN).

After enquiries and votes carried out in accordance with the rules of this Association, this Standard has received the approval of the National Associations and the Official Services of the member countries of ASD, prior to its presentation to CEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by August 2009, and conflicting national standards shall be withdrawn at the latest by August 2009.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

This standard was reviewed by the Domain Technical Coordinator of ASD-STAN's Electrical Domain.

After inquiries and votes carried out in accordance with the rules of ASD-STAN defined in ASD-STAN's General Process Manual, this standard has received approval for Publication.

<https://standards.iteh.ai/catalog/standards/sist/a9cba56f-bcfe-4ca9-be31-a4c129adbe1f/sist-en-2997-013-2009>

EN 2997-013:2009 (E)

1 Scope

This standard specifies the characteristics of O'ring seal for jam-nut receptacles in the family of circular electrical connectors coupled by threaded ring.

It applies to the class defined in Table 2.

For the receptacles using these jam-nuts, see EN 2997-004 and EN 2997-006.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies

EN 2997-001, *Aerospace series — Connectors, electrical, circular, coupled by threaded ring, fire-resistant or non fire-resistant, operating temperatures – 65 °C to 175 °C continuous, 200 °C continuous, 260 °C peak — Part 001: Technical specification*

EN 2997-002, *Aerospace series — Connectors, electrical, circular, coupled by threaded ring, fire-resistant or non fire-resistant, operating temperatures – 65 °C to 175 °C continuous, 200 °C continuous, 260 °C peak — Part 002: Specification of performance and contact arrangements*

EN 2997-004, *Aerospace series — Connectors, electrical, circular, coupled by threaded ring, fire-resistant or non fire-resistant, operating temperatures – 65 °C to 175 °C continuous, 200 °C continuous, 260 °C peak — Part 004: Jam-nut mounted receptacle — Product standard*

EN 2997-006, *Aerospace series — Connectors, electrical, circular, coupled by threaded ring, fire-resistant or non fire-resistant, operating temperatures – 65 °C to 175 °C continuous, 200 °C continuous, 260 °C peak — Part 006: Hermetic jam-nut mounted receptacle — Product standard*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in EN 2997-001 apply.

4 Required characteristics

4.1 Dimensions

See Figure 1 and Table 1.

Dimensions and tolerances are in millimetres, they apply after surface treatment.

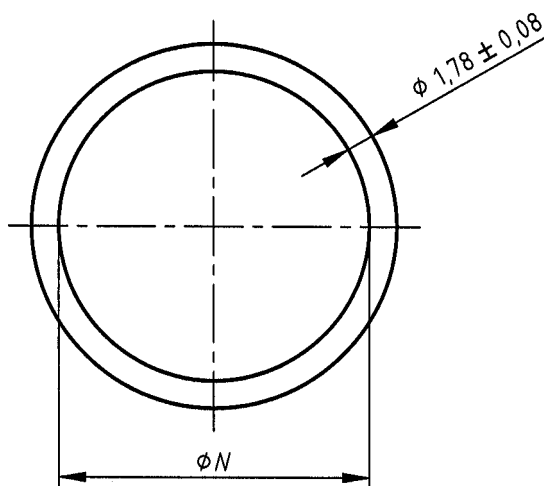


Figure 1

Table 1

Housing size	N	Mass g max.
08	17,02 16,92	0,23
10	20,22 20,12	0,27
12	24,99 24,89	0,32
14	26,57 26,47	0,33
16	29,74 29,64	0,37
18	32,92 32,82	0,41
20	37,64 37,54	0,47
22	40,87 40,77	0,50
24	43,99 43,89	0,56
28	50,39 50,29	0,64

4.2 Material, surface treatment

See Table 2.

EN 2997-013:2009 (E)**4.3 Main general characteristics**

See EN 2997-002.

5 Designation

EXAMPLE

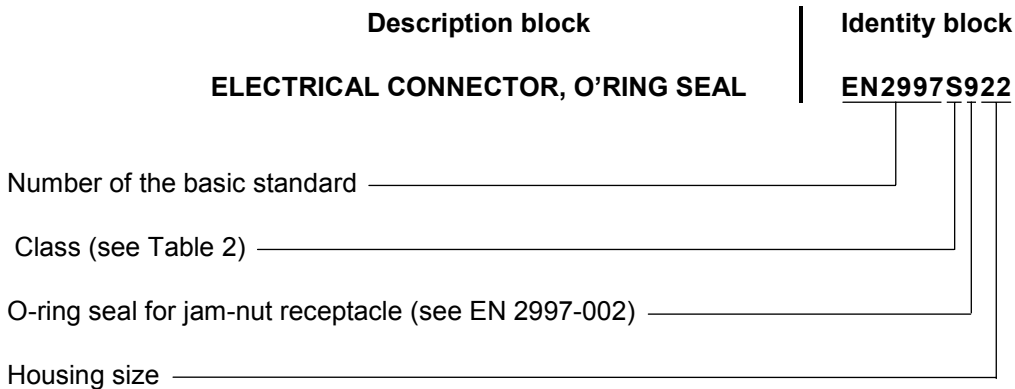


Table 2

Class	Model description
S	O-ring seal for jam-nut receptacle maximum operating temperature 200 °C continuous. NOTE S class O-ring are used for both RS, WS, S, Y and YE classes jam-nut receptacles.
SE	O-ring seal for jam-nut receptacle maximum operating temperature 260 °C peak.

6 Marking

Not applicable.

7 Technical specification

See EN 2997-001.