



# SLOVENSKI STANDARD SIST EN 3660-026:2009

01-maj-2009

5 YfcbUj h\_U!`8 cXUh\_]nUc\_fc[ `Y]b'dfUj c\_cfbYYY\_f] bY]b'cdh] bY'\_cbY\_lcf^Y!  
\$&\* "XY.`? UYg\_Ugdc^\_Užhd'5 ž- \$žbYhYgb^YbUžn'XfyUca `nUgdc^\_c'nU9B" (\* '!  
GHbXUfX'nUdfc]nj cX

Aerospace series - Cable outlet accessories for circular and rectangular electrical and optical connectors - Part 026: Cable outlet, style A , 90°, unsealed, with cable tie strain relief for EN 3646 - Product standard

**STANDARD PREVIEW**

Luft- und Raumfahrt - Endgehäuse für elektrische und optische Rund- und Rechtecksteckverbinder - Teil 026: Endgehäuse, Bauform A, 90°, nicht abgedichtet, mit Arm für Kabelbinder für EN 3646 - Produktnorm

[SIST EN 3660-026:2009](https://standards.iteh.ai/catalog/standards/sist/12c59d23-86c3-4dbf-b8c4-3c91e0100000/sist-en-3660-026-2009)

[https://standards.iteh.ai/catalog/standards/sist/12c59d23-86c3-4dbf-b8c4-](https://standards.iteh.ai/catalog/standards/sist/12c59d23-86c3-4dbf-b8c4-3c91e0100000/sist-en-3660-026-2009)

Série aérospatiale - Accessoires arrière pour connecteurs circulaires et rectangulaires électriques et optiques - Partie 026 : Raccord, type A, coudé 90°, non étanche, avec tenue du câble par frettage pour EN 3646 - Norme de produit

**Ta slovenski standard je istoveten z: EN 3660-026:2009**

**ICS:**

49.060 Š^c^ \ æš Ą^• [ |b \ æ Aerospace electric  
^|\ dā } æ ] !^ { æš Ą Ą c { ã equipment and systems

**SIST EN 3660-026:2009 en**

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST EN 3660-026:2009

<https://standards.iteh.ai/catalog/standards/sist/12c59d23-86c3-4dbf-b8c4-ae91554cb531/sist-en-3660-026-2009>

EUROPEAN STANDARD

EN 3660-026

NORME EUROPÉENNE

EUROPÄISCHE NORM

February 2009

ICS 49.060

English Version

Aerospace series - Cable outlet accessories for circular and rectangular electrical and optical connectors - Part 026: Cable outlet, style A, 90°, unsealed, with cable tie strain relief for EN 3646 - Product standard

Série aérospatiale - Accessoires arrière pour connecteurs circulaires et rectangulaires électriques et optiques - Partie 026 : Raccord, type A, coudé 90°, non étanche, avec tenue du câble par frettage pour EN 3646 - Norme de produit

Luft- und Raumfahrt - Endgehäuse für elektrische und optische Rund- und Rechtecksteckverbinder - Teil 026: Endgehäuse, Bauform A, 90°, nicht abgedichtet, mit Arm für Kabelbinder für EN 3646 - Produktnorm

This European Standard was approved by CEN on 6 September 2008.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN Management Centre has the same status as the official versions.

[SIST EN 3660-026:2009](https://standards.iteh.ai/catalog/standards/sist/12c59d23-86c3-4dhf18c4-91541151/EN-3660-026)

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION  
COMITÉ EUROPÉEN DE NORMALISATION  
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: Avenue Marnix 17, B-1000 Brussels

**Contents**

Page

Foreword.....	3
1 <b>Scope</b> .....	4
2 <b>Normative references</b> .....	4
3 <b>Terms and definitions</b> .....	4
4 <b>Characteristics</b> .....	4
5 <b>Designation</b> .....	10
6 <b>Marking</b> .....	10
7 <b>Technical specification</b> .....	10

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[SIST EN 3660-026:2009](https://standards.iteh.ai/catalog/standards/sist/12c59d23-86c3-4dbf-b8c4-ae91554cb531/sist-en-3660-026-2009)

<https://standards.iteh.ai/catalog/standards/sist/12c59d23-86c3-4dbf-b8c4-ae91554cb531/sist-en-3660-026-2009>

## Foreword

This document (EN 3660-026:2009) has been prepared by the Aerospace and Defence Industries Association of Europe - Standardization (ASD-STAN).

After enquiries and votes carried out in accordance with the rules of this Association, this Standard has received the approval of the National Associations and the Official Services of the member countries of ASD, prior to its presentation to CEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by August 2009, and conflicting national standards shall be withdrawn at the latest by August 2009.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

**ITEH STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST EN 3660-026:2009

<https://standards.iteh.ai/catalog/standards/sist/12c59d23-86c3-4dbf-b8c4-ae91554cb531/sist-en-3660-026-2009>

**EN 3660-026:2009 (E)****1 Scope**

This product standard defines a range of cable outlets, 90°, style A, for use under the following conditions:

Associated electrical connector(s)	:	EN 3660-002
Temperature range, Class A	:	– 65 °C to 200 °C
Class N	:	– 65 °C to 200 °C
Class W	:	– 65 °C to 175 °C

**2 Normative references**

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 2591-100\*, *Aerospace series — Elements of electrical and optical connection — Test methods — General*

EN 3660-001, *Aerospace series — Cable outlet accessories for circular and rectangular electrical and optical connectors — Part 001: Technical specification*

EN 3660-002, *Aerospace series — Cable outlet accessories for circular and rectangular electrical and optical connectors — Part 002: Index of product standards*

EN 3660-036, *Aerospace series — Cable outlet accessories for circular and rectangular electrical and optical connectors — Part 036: Component parts, spacer pad*<sup>1)</sup>

[SIST EN 3660-026:2009](https://standards.iteh.ai/catalog/standards/sist/12c59d23-86c3-4dbf-b8c4-ae91554cb531/sist-en-3660-026-2009)

<https://standards.iteh.ai/catalog/standards/sist/12c59d23-86c3-4dbf-b8c4-ae91554cb531/sist-en-3660-026-2009>

**3 Terms and definitions**

For the purposes of this document, the terms and definitions given in EN 3660-001 apply.

**4 Characteristics****4.1 Dimensions and masses**

For dimensions and masses, see Figure 1 and Table 1.


For interface dimensions, see 4.3.

All dimensions are in millimetres.

---

\* All parts quoted in Table 4.

1) In preparation at the date of publication of this standard.

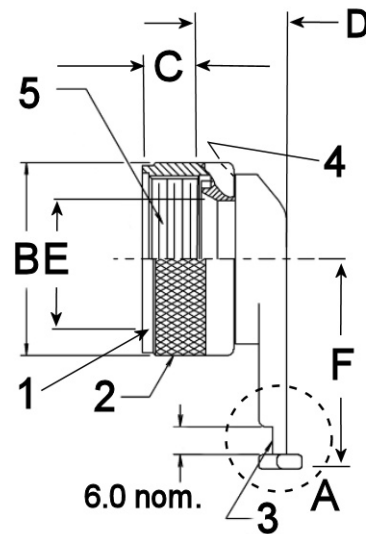

Detail A

iTeh STANDARD PREVIEW  
(standards.iteh.ai)

**Key**

- 1 Area for marking (see Clause 6)
- 2 Knurled, manufactures option
- 3 Area for cable tie or lacing cord
- 4 3 off wire lock holes equi-spaced for 0,8 mm max. diameter wire
- 5 A-Thread (see Table 1)

SIST EN 3660-026:2009

<https://standards.iteh.ai/catalog/standards/sist/12c59d23-86c3-4dbf-b8c4-ae91554cb531/sist-en-3660-026-2009>

**Figure 1****Table 1**

Shell size	A	B	C <sup>a</sup>	D	E	F	Masses without spacer pad Classes A, N and W max. g
	Thread Class 2B  Inches	max. mm	$0$ $-0,56$ mm	max. mm	$\pm 0,8$ mm	max. mm	
08	0.500-20UNF	15,7	7,75	12,1	6,7	22,9	4,8
10	0.625-24UNEF	18,6	7,75	12,1	9,4	24,1	6,4
12	0.750-20UNEF	21,8	7,75	12,1	12,9	27,4	7,5
14	0.875-20UNEF	25,0	7,75	12,9	14,7	33,8	9,2
16	1.000-18UNEF	28,2	7,75	12,9	17,9	35,3	11,2
18	1.063-18UNEF	30,9	7,75	12,9	19,9	37,6	12,7
20	1.188-18UNEF	34,2	7,75	12,9	23,1	42,2	14,8
22	1.313-18UNEF	37,3	7,75	12,9	26,3	47,0	18,1
24	1.438-18UNEF	40,5	7,75	12,9	29,2	48,5	19,3

<sup>a</sup> "C" Dimension is taken when the coupling nut is pulled in forward position.

## EN 3660-026:2009 (E)

## 4.2 Component parts

Spacer pad, see EN 3660-036.

## 4.3 Interface dimensions


## 4.3.1 Associated connectors

See EN 3660-002.

## 4.3.2 Interface

See Figures 2 and 3 and Table 2.

All dimensions are in millimetres.

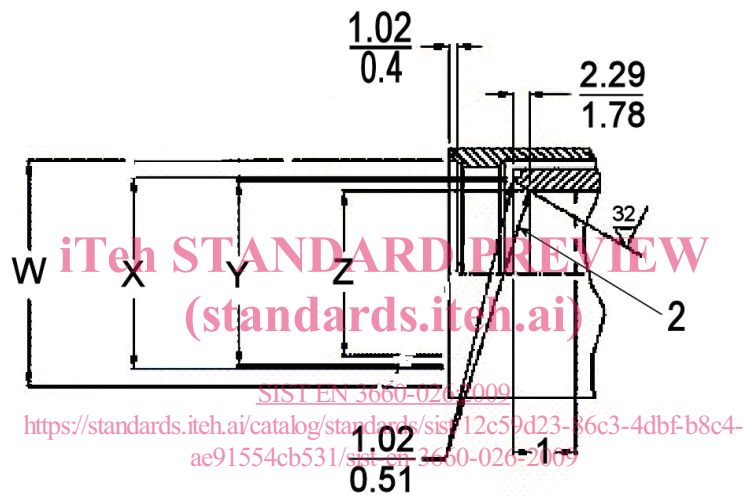

## Key

- 1 4,95 mm min. penetration of Z diameter measured from front of teeth
- 2  $N$  number of teeth, see Table 2

Figure 2

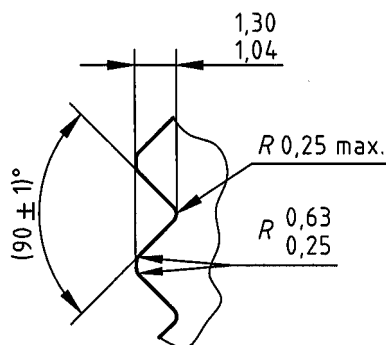


Figure 3



Table 2

Shell size	$W$ + 0,64 0 mm	$X$ 0 - 0,38 mm	$Y$ + 0,38 0 mm	$Z$ 0 - 0,25 mm	$N$ Number of teeth
08	12,70	9,14	7,59	6,86	12
10	15,88	12,55	11,00	9,53	15
12	19,05	15,49	13,94	12,98	21
14	22,23	18,67	17,12	14,86	24
16	25,40	21,84	20,29	18,03	30
18	26,97	23,27	22,07	20,04	33
20	30,18	26,44	25,25	23,22	36
22	33,32	29,62	28,42	26,39	39
24	36,53	32,79	31,60	29,31	42

#### 4.4 Material and finish

Cable outlet: Material/Finish Class A : Aluminium/black anodised  
 Material/Finish Class N : Aluminium/electroless nickel plated  
 Material/Finish Class W : Aluminium/olive drab cadmium plated

#### 4.5 Assembly torque

These torque values are intended for installation use only. See Table 3.

Table 3

Shell size	Torque Nm $\pm$ 0,5
08	4,5
10	4,5
12	4,5
14	4,5
16	4,5
18	4,5
20	9,0
22	9,0
24	9,0

#### 4.6 Coupling thread strength torque

These torque values are for test purposes, see EN 2591-420 and Table 4.