



SLOVENSKI STANDARD SIST EN 3375-008:2009

01-maj-2009

5 YfcbUj h_U!`9`Y_hf] b]_UV]nUX][]HUb]dfYbcg'dcXUh_cj`!`\$\$, "XY.`9bc`b]`cd`Yh!
ühf]j]b]nj YnXUgh]_UVYž%\$\$`c\ a cj`fEi UX`WUV`YŁ!`H]d`?8`!`GhUbXUfX`nUdfc]nj cX

Aerospace series - Cable, electrical, for digital data transmission - Part 008: Single braid
- Star Quad 100 ohms - Type KD - Product standard

Luft- und Raumfahrt - Elektrische Leitungen für Digitaldatenübertragungen - Teil 008:
Einfach geschirmt - Quad 100 Ohm - Typ KD - Produktnorm

Série aérospatiale - Câbles électriques pour transmission de données numériques -
Partie 008: Simple tresse - Quarte en étoile 100 Ohms - Type KD - Norme de produit

<https://standards.iteh.ai/catalog/standards/sist/84800f70-0d21-4df3-a034-4317f99e49e1/sist-en-3375-008-2009>

Ta slovenski standard je istoveten z: EN 3375-008:2009

ICS:

49.060 Š^æ\ æš Ą^•[|b\ æ Aerospace electric
^|\ dā} æ[]!^{\ æš Ąã c{ ã equipment and systems

SIST EN 3375-008:2009

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 3375-008:2009

<https://standards.iteh.ai/catalog/standards/sist/84800f70-0d21-4df3-a034-4317f99e49e1/sist-en-3375-008-2009>

EUROPEAN STANDARD

EN 3375-008

NORME EUROPÉENNE

EUROPÄISCHE NORM

March 2009

ICS 49.060

English Version

**Aerospace series - Cable, electrical, for digital data transmission
- Part 008: Single braid - Star Quad 100 ohms - Type KD -
Product standard**

Série aérospatiale - Câbles électriques pour transmission
de données numériques - Partie 008: Simple tresse -
Quarte en étoile 100 Ohms - Type KD - Norme de produit

Luft- und Raumfahrt - Elektrische Leitungen für
Digitaldatenübertragungen - Teil 008: Einfach geschirmt -
Quad 100 Ohm - Typ KD - Produktnorm

This European Standard was approved by CEN on 30 August 2008.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

<https://standards.iteh.ai/catalog/standards/sist/8-400170-0d21-4df3-a034-4317f99e49e1/sist-en-3375-008-2009>



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents

Page

Foreword.....	3
1 Scope	4
2 Normative references	4
3 Terms and definitions	4
4 Required characteristics	4
5 Tests	6
6 Quality assurance	11
7 Identification and marking (according to EN 3375-002 and TR 6058)	11
8 Packaging	12
9 Technical specification	12

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 3375-008:2009](https://standards.iteh.ai/catalog/standards/sist/84800f70-0d21-4df3-a034-4317f99e49e1/sist-en-3375-008-2009)

<https://standards.iteh.ai/catalog/standards/sist/84800f70-0d21-4df3-a034-4317f99e49e1/sist-en-3375-008-2009>

Foreword

This document (EN 3375-008:2009) has been prepared by the Aerospace and Defence Industries Association of Europe - Standardization (ASD-STAN).

After enquiries and votes carried out in accordance with the rules of this Association, this Standard has received the approval of the National Associations and the Official Services of the member countries of ASD, prior to its presentation to CEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by September 2009, and conflicting national standards shall be withdrawn at the latest by September 2009.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

ITEH STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 3375-008:2009

<https://standards.iteh.ai/catalog/standards/sist/84800f70-0d21-4df3-a034-4317f99e49e1/sist-en-3375-008-2009>

EN 3375-008:2009 (E)**1 Scope**

This standard specifies the dimensions, tolerances, required characteristics and the mass of an AWG 24 shielded quad cable, type KD, intended for high speed (100 Mbit/s) full duplex Ethernet networks.

Linked to this particular application, the operating temperatures of the cable are between – 65 °C and 125 °C.

This cable is laser markable, this marking satisfies the requirements of EN 3838.

The characteristics impedance must be $(100 \pm 15) \Omega$.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 3375-001, *Aerospace series — Cable, electrical, for digital data transmission — Part 001: Technical specification.*

EN 3375-002, *Aerospace series — Cable, electrical, for digital data transmission — Part 002: General.* ¹⁾

EN 3475-100*, *Aerospace series — Cables, electrical, aircraft use — Test methods — Part 100: General.*

EN 3838, *Aerospace series — Requirements and tests on user-applied markings on aircraft electrical cables.* ¹⁾

EN 9133, *Aerospace series — Quality management systems — Qualification procedure for aerospace standard parts.*

TR 6058, *Aerospace series — Cable code identification list.* ²⁾

3 Terms and definitions

For the purposes of this document, the terms and definitions given in EN 3475-100 apply.

4 Required characteristics**4.1 Configuration, dimensions, tolerances and mass**

The configuration, dimensions and tolerances shall be in accordance with Figure 1 and Table 1.


Mass: ≤ 41 kg/km.

Dimensions are in millimetres.

* All parts quoted in Table 3.

1) Published as ASD Prestandard at the date of publication of this standard.

2) Published as ASD Technical Report at the date of publication of this standard.

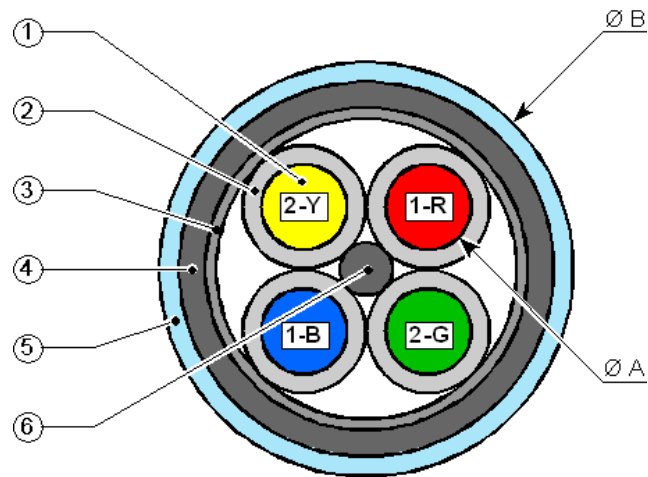

NOTE No. of elements in accordance with Table 2.

Figure 1 — Configuration, dimensions and tolerances

Table 1 — Dimensions, tolerances and general characteristics

Stranded conductor (Ø A)	$0,598 \text{ mm} \leq \varnothing \leq 0,656 \text{ mm}^a$
Insulation diameter (single wire)	$1,35 \text{ mm} \leq \varnothing \leq 1,52 \text{ mm}^a$
Braid, shield	Strand diameter: 0,10 mm
Outer diameter of cable (Ø B)	< 5,0 mm
Colour of the jacket ⑤	Light blue
Colour of components ①	Pair 1: Red (+), Blue (-) Pair 2: Yellow (+), Green (-)
Minimum bending radius for dynamic installation	$10 \times \text{Max. outer diameter}$
Minimum bending radius in static	$5 \times \text{Max. outer diameter}$
^a Adapted tools are requested for stripping.	

4.2 Material

The material and surface treatment shall be in accordance with Table 2.

Table 2 — Material

No. of element	Element	Material
1	Stranded conductor	Silver plated copper
2	Insulation	Fluoropolymer
3	Protection tape	Synthetic
4	Braid	Silver plated copper
5	Jacket	Fluoropolymer
6	Filler	Fluoropolymer

EN 3375-008:2009 (E)

4.3 General characteristics

General characteristics shall be in accordance with Table 1.

5 Tests

Tests shall be in accordance with Table 3.

Maximum attenuation of the cable at 25 °C shall be in accordance with Table 4.

Minimum near end cross-talk of the cable and contacts shall be in accordance with Table 5.

Transfer impedance shall be in accordance with Table 6.

Table 3 — Tests as per EN 3475

EN 3475-	Test	Carried out on / Requirement	
		Component (samples from finished cable)	Cable
100	General	Not applicable	Applicable
201	Visual examination	Applicable	Applicable
202	Mass	Not applicable	Applicable, see 4.1.
203	Dimensions	Applicable	Applicable See Table 1.
301	Ohmic resistance per unit length	Not applicable	Applicable Maximum electrical loop resistance 192 Ω/km
302	Voltage proof test	Not applicable	Applicable Conductor/conductor Conductors/shield DC : 1 kV (1 mn) or 2,5 kV (2 s) AC : 700 V (1 mn) or 1,7 kV (2 s)
303	Insulation resistance	Not applicable	Applicable ≥ 1 500 MΩ.km at 20 °C
304	Surface resistance	Applicable 1 250 MΩ.mm	Applicable 1 250 MΩ.mm
305	Overload resistance	Not applicable	Not applicable
306	Continuity of conductors	Not applicable	Not applicable
307	Corona extinction voltage	Not applicable	Not applicable
401	Accelerated ageing	Not applicable	Applicable T = (155 ± 5) °C, 168 h Mandrel Ø = 60 mm Load = 0,7 daN

continued

Table 3 (continued)

EN 3475-	Test	Carried out on / Requirement	
		Component (samples from finished cable)	Cable
402	Shrinkage and delamination	Applicable $T = (125 \pm 5) ^\circ\text{C}$ shrinking of the insulation = 0,8 mm max.	Applicable $T = (125 \pm 5) ^\circ\text{C}$ shrinking of the jacket = 5 mm max.
403	Delamination and blocking	Applicable $T = (125 \pm 5) ^\circ\text{C}$ Mandrel $\varnothing = 20 \text{ mm}$	Applicable $T = (125 \pm 5) ^\circ\text{C}$ Mandrel $\varnothing = 60 \text{ mm}$
404	Thermal shock	Not applicable	Applicable 30 min at $(125 \pm 5) ^\circ\text{C}$ / 30 min at $-65 ^\circ\text{C}$ / 30 min at $20 ^\circ\text{C}$ shrinking of the jacket = 5 mm max.
405	Bending at ambient temperature	Not applicable	Applicable Mandrel $\varnothing = 60 \text{ mm}$ Load = 0,7 daN
406	Cold bend test	Not applicable	Applicable $T = -65 ^\circ\text{C}$ Mandrel $\varnothing = 60 \text{ mm}$ Load = 0,7 daN
407	Flammability	Not applicable	Applicable Load = 1 daN
408	Fire resistance	Not applicable	Not applicable
409	Air-excluded ageing	Not applicable	Not applicable
410	Thermal endurance	Not applicable	Not applicable
411	Resistance to fluids	Not applicable	Applicable
412	Humidity resistance	Not applicable	Not applicable
413	Wrap back test	Not applicable	Not applicable
414	Differential scanning calorimeter (DSC test)	Not applicable	Not applicable
415	Rapid change of temperature	Not applicable	Not applicable
416	Thermal stability	Not applicable	Not applicable
418	Thermal endurance for conductors	Not applicable	Not applicable
501	Dynamic cut-through	Not applicable	Applicable At $23 ^\circ\text{C}$: $> 1 \text{ daN}$ At operating temperature: $\geq 0,5 \text{ daN}$

continued