



SLOVENSKI STANDARD
SIST EN 999:2000+A1:2008
01-december-2008

JUfbcghlfc^Yj !'DcghUj]hYj `j Ufcj UbYcdfYa Y[`YXY'bU\]fbcghdf]V]jYj Ub^UXYcj
`cj Yy_Y[UHYgU

Safety of machinery - The positioning of protective equipment in respect of approach speeds of parts of the human body

Sicherheit von Maschinen - Anordnung von Schutzeinrichtungen im Hinblick auf Annäherungsgeschwindigkeiten von Körperteilen

Sécurité des machines - Positionnement des équipements de protection en fonction de la vitesse d'approche des parties du corps

SIST EN 999:2000+A1:2008
<https://standards.iteh.ai/catalog/standards/sist/93da8dcc-a546-4735-8c88-b55a550c1103/sist-en-999-2000a1-2008>

Ta slovenski standard je istoveten z: EN 999:1998+A1:2008

ICS:

13.110	Varnost strojev	Safety of machinery
13.180	Ergonomija	Ergonomics

SIST EN 999:2000+A1:2008 en,fr,de

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 999:2000+A1:2008
<https://standards.iteh.ai/catalog/standards/sist/93da8dcc-a546-4735-8c88-b55a550c1103/sist-en-999-2000a1-2008>

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

EN 999:1998+A1

July 2008

ICS 13.110; 13.180

Supersedes EN 999:1998

English Version

Safety of machinery - The positioning of protective equipment in respect of approach speeds of parts of the human body

Sécurité des machines - Positionnement des équipements de protection en fonction de la vitesse d'approche des parties du corps

Sicherheit von Maschinen - Anordnung von Schutzeinrichtungen im Hinblick auf Annäherungsgeschwindigkeiten von Körperteilen

This European Standard was approved by CEN on 20 September 1998 and includes Amendment 1 approved by CEN on 6 June 2008.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

[SIST EN 999:2000+A1:2008](https://standards.iteh.ai/catalog/standards/sist/93da8dcc-a546-4735-8c88-b55a550c1103/sist-en-999-2000a1-2008)

<https://standards.iteh.ai/catalog/standards/sist/93da8dcc-a546-4735-8c88-b55a550c1103/sist-en-999-2000a1-2008>



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

Contents

Page

Foreword.....	3
Introduction	4
1 Scope	4
2 Normative references	5
3 Definitions	6
4 Methodology.....	7
5 General formula for the calculation of minimum distances	9
6 Calculation of minimum distances for electro-sensitive protective equipment employing active opto-electronic protective devices	9
6.1 Direction of approach normal to the detection zone	10
6.2 Direction of approach parallel to the detection zone.....	13
6.3 Direction of approach angled to the detection zone.....	14
6.4 Dual position equipment.....	16
7 Method of calculating the minimum distances for ground level trip devices	16
7.1 General method.....	16
7.2 Floor mounting.....	17
7.3 Step mounting.....	17
8 Two-hand control devices	17
Annex A (informative) Worked examples.....	18
Annex B (informative) Walking speeds and stride lengths.....	22
Annex ZA (informative) Relationship between this European Standard and the Essential Requirements of EU Directive 98/37/EC	23
Annex ZB (informative) Relationship between this European Standard and the Essential Requirements of EU Directive 2006/42/EC	24

Foreword

This document (EN 999:1998+A1:2008) has been prepared by Technical Committee CEN/TC 114 "Safety of machinery", the secretariat of which is held by DIN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by January 2009, and conflicting national standards shall be withdrawn at the latest by January 2009.

This document includes Amendment 1, approved by CEN on 2008-06-06.

This document supersedes EN 999:1998.

The start and finish of text introduced or altered by amendment is indicated in the text by tags $\boxed{A_1}$ and $\boxed{A_1}$.

It is a Type B1 standard and is intended to be an accompaniment to the European Standards EN 292-1 and EN 292-2.

This document has been prepared under a mandate given to CEN by the European Commission and the European Free Trade Association, and supports essential requirements of EC Directive(s).

$\boxed{A_1}$ For relationship with EC Directive(s), see informative Annexes ZA and ZB, which are integral parts of this document. $\boxed{A_1}$

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

Introduction

The effectiveness of certain types of protective equipment described in this standard to minimise risk relies, in part, on the relevant parts of that equipment being correctly positioned in relation to the danger zone. In deciding on these positions a number of aspects will need to be taken into account such as:

- A need for the identification of hazards and an assessment of all the risks;
- Practical experiences of users including accident statistics and existing national standards;
- The state of the art and possible future technical developments;
- Type of equipment to be used;
- Response times of protective equipment used;
- Time taken to ensure the safe condition of the machine following operation of the protective equipment, e.g. to stop the machine;
- Bio-mechanical and anthropometric data of body parts;
- Path taken by body part when moving from the sensing or actuating means towards the danger zone;
- The possible presence of a person between the device and the danger zone;
- The possibility of undetected access to the danger zone.

If these aspects are further developed the current state of the art, reflected in this standard, will be improved.

1 Scope

1.1 This European Standard provides parameters based on values for hand/arm and approach speeds and the methodology to determine the minimum distances from specific sensing or actuating devices of protective equipment to a danger zone.

1.2 These specific devices are:

- Trip devices as defined in 3.23.5 of EN 292-1:1991 (specifically electro-sensitive protective equipment, including those used additionally to initiate operation, and pressure sensitive mats).
- Two-hand control devices as defined in 3.23.4 of EN 292-1:1991 and covered by EN 574.

NOTE For the purpose of this standard hold-to-run controls, which are designed to be actuated with one hand, are not considered to be protective equipment.

1.3 This standard gives guidance based on the assumption that the correct device has been chosen either by reference to the appropriate Type-C standard or by carrying out a risk assessment.

1.4 The calculated distances, when implemented, will provide sufficient protection for persons against the risks caused by approaching a danger zone which generate any of the following mechanical hazards, such as:

Crushing, shearing, cutting or severing, entanglement, drawing-in or trapping, friction or abrasion, stabbing or puncture and impact.

Protection against the risks from mechanical hazards arising from the ejection of solid or fluid materials and non-mechanical hazards such as toxic emissions, electricity, radiation etc. are not covered by this standard.

1.5 The distances are derived from data that take into account population groups likely to be found in European countries and are consequently applicable to those groups.

NOTE 1 If this standard is to be used for non-industrial purposes then the designer should take into account that this data is based on industrial experience.

NOTE 2 Until specific data is available for approach speeds for children, this standard uses adult speeds and lower detection factors, where relevant, to calculate the distances that could be within the reach of children.

1.6 This standard does not apply to protective equipment which is intended to be moved, without tools, nearer to the danger zone than the calculated distance, e.g. pendant two-hand control devices.

1.7 The minimum distances derived from this standard do not apply to protective equipment used to detect the presence of persons within an area already protected by a guard or electro-sensitive protective equipment.

2 Normative references

SIST EN 999:2000+A1:2008

[https://standards.iteh.ai/catalog/standards/sist/93da8dcc-a546-4735-8c88-](https://standards.iteh.ai/catalog/standards/sist/93da8dcc-a546-4735-8c88-b55a550c1103/sist-en-999-2000a1-2008)

[b55a550c1103/sist-en-999-2000a1-2008](https://standards.iteh.ai/catalog/standards/sist/93da8dcc-a546-4735-8c88-b55a550c1103/sist-en-999-2000a1-2008)

This European Standard incorporates by dated or undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this European Standard only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

EN 292-1:1991, *Safety of machinery - Basic concepts, general principles for design — Part 1: Basic terminology, methodology.*

EN 292-2, *Safety of machinery - Basic concepts, general principles for design — Part 2: Technical principles and specifications.*

EN 294:1992, *Safety of machinery – Safety distances to prevent danger zones being reached by the upper limbs.*

EN 574, *Earth-moving machinery – Two-hand control devices – Functional aspects, principles for design.*

EN 1050, *Safety of machinery – Principles for risk assessment.*

EN 61496-1:1997, *Safety of machinery – Electro-sensitive protective equipment – Part 1: General requirements and tests (IEC 61496-1:1997).*

EN 999:1998+A1:2008 (E)

3 Definitions

For the purposes of this standard the following definitions apply. Other definitions are given in EN 292-1 and EN 292-2.

3.1

actuation (of protective equipment)

physical initiation of the protective equipment when it detects movement of the body or a part of the body

3.2

overall system stopping performance

time or travel occurring from the actuation of the sensing function to the cessation of hazardous motion, or to the machine assuming a safe condition

[based on 3.20 of EN 61496-1:1997]

The overall system stopping performance comprises a minimum of two phases.

$T = t_1 + t_2$, where


T is the overall system stopping performance.

t_1 is the maximum time between the actuation of the sensing function and the output signal switching devices being in the off state,

t_2 is the maximum response time of the machine, i.e. the time required to stop the machine or remove the risks after receiving the output signal from the protective equipment. t_2 is influenced by various factors, e.g. temperature, switching time of valves, ageing of components.

The relationship of t_1 and t_2 is given in figure 1.

t_1 and t_2 are functions of the protective equipment and the machine respectively and are determined by design and measurement.

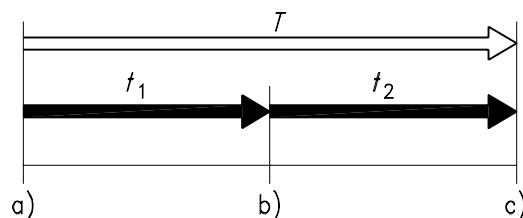

- a) Actuating of protective equipment
- b) Operation of protective equipment
- c) Elimination of risk

Figure 1 — Relationship between t_1 and t_2

3.3

detection capability

the sensing function parameter limit specified by the supplier that will cause actuation of the electro-sensitive protective equipment (EPSE).

[3.4 of EN 61496-1:1997]

NOTE Symbol d is used throughout the standard.

3.4**electro-sensitive protective equipment (ESPE)**

an assembly of devices and/or components, working together for protective tripping or presence-sensing purposes and comprising as a minimum:

- A sensing device;
- Controlling/monitoring devices;
- Output signal switching devices.

[3.1 of EN 61496-1:1997]

4 Methodology

Figure 2 provides a schematic representation of the methodology for determining the correct position of sensing or actuating devices of protective equipment using this standard which is as follows:

- a) Identify the hazards and assess the risks (see EN 292-1 and EN 1050).
- b) If a Type-C standard exists for the machine, select one of the specified types of protective equipment from that machine-specific standard, and then use the distance specified by that standard.
- c) If there is no Type-C standard or if the Type-C standard does not specify any minimum distances then use the formulae in this standard to calculate the minimum distance for the protective equipment selected. The selection of the appropriate type of protective equipment should be made in accordance with the relevant Type-A and Type-B standards.
- d) Incorporate the distance in the machine design.
- e) Ensure the device has been installed in such a manner that access to the danger zone will not be possible without detection by the device.
- f) Check if the determined position will allow persons to be between the sensing devices of the protective equipment and the danger zone without being detected. In this case supplementary measures may be required depending on the risk.

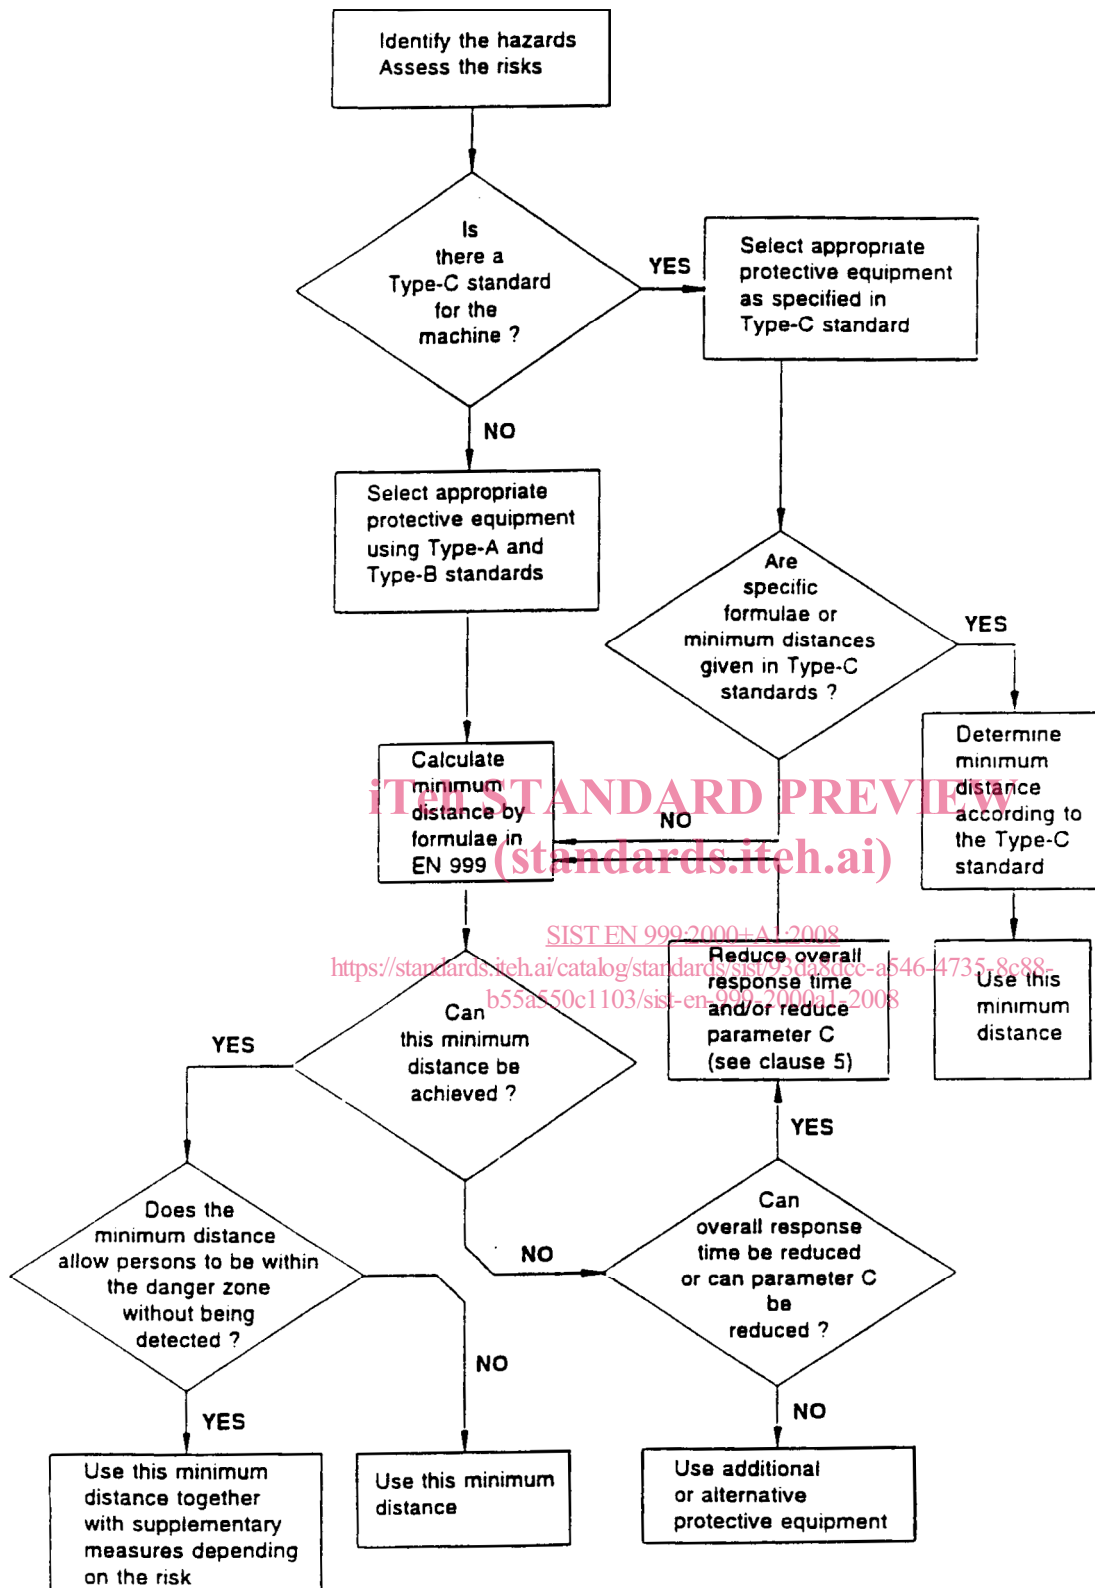


Figure 2 — Schematic of methodology

5 General formula for the calculation of minimum distances

The minimum distance from the danger zone shall be calculated by using the general formula (1).

$$S = (K \times T) + C \quad (1)$$

where:

S is the minimum distance in millimetres, from the danger zone to the detection point, line, plane or zone;

K is a parameter in millimetres per second, derived from data on approach speeds of the body or parts of the body (see also annex B);

T is the overall system stopping performance in seconds (see 3.2);

C is an additional distance in millimetres, based on intrusion towards the danger zone prior to actuation of the protective equipment.

For worked examples see annex A.

6 Calculation of minimum distances for electro-sensitive protective equipment employing active opto-electronic protective devices

Users of this standard shall select and use electro-sensitive protective equipment for a machine in accordance with the appropriate Type-C standard for that particular machine. If no Type-C standard exists, they shall undertake a risk assessment according to EN 1050.

This clause considers three main applications based on the direction of approach to the detection zone¹⁾:

- Normal approach (see figure 3);
- Parallel approach (see figure 4);
- Angled approach (see figure 5).

Where it is foreseeable that any gaps adjacent to or within the detection zone of the electro-sensitive protective equipment will allow access to the danger zone then this should be taken into account in the correct positioning of the protective equipment and additional safeguards considered.

Access to the danger zone by reaching over or round the electro-sensitive protective equipment, together with any other protective equipment and additional safeguards, shall be prevented.

1) Definition see EN 61496-1