# INTERNATIONAL STANDARD

Second edition 2003-09-01

# Subland twist drills with Morse taper shanks for holes prior to tapping screw threads

Forets étagés à queue cône Morse pour avant-trous de taraudage

# iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 3438:2003 https://standards.iteh.ai/catalog/standards/sist/e2208c5f-8d86-4dff-b7dfc511f77d37fc/iso-3438-2003



Reference number ISO 3438:2003(E)

#### PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

# iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 3438:2003 https://standards.iteh.ai/catalog/standards/sist/e2208c5f-8d86-4dff-b7dfc511f77d37fc/iso-3438-2003

© ISO 2003

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office Case postale 56 • CH-1211 Geneva 20 Tel. + 41 22 749 01 11 Fax + 41 22 749 09 47 E-mail copyright@iso.org Web www.iso.org

Published in Switzerland

#### Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 3438 was prepared by Technical Committee ISO/TC 29, *Small tools*, Subcommittee SC 2, *High speed steel cutting tools and their attachments*.

This second edition cancels and replaces the first edition (ISO 3438:1975), which has been technically revised, in particular in order to align with ISO 273:1979 rds.iteh.ai)

ISO 3438:2003 https://standards.iteh.ai/catalog/standards/sist/e2208c5f-8d86-4dff-b7dfc511f77d37fc/iso-3438-2003

# iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 3438:2003 https://standards.iteh.ai/catalog/standards/sist/e2208c5f-8d86-4dff-b7dfc511f77d37fc/iso-3438-2003

# Subland twist drills with Morse taper shanks for holes prior to tapping screw threads

#### 1 Scope

This International Standard lays down the dimensions of subland twist drills with Morse taper shanks for holes prior to tapping screw threads.

The drills have been designed to produce holes prior to tapping metric threads (coarse pitch series) over a selected range of M8 to M30.

This International Standard complements ISO 2306.

Subland twist drills with cylindrical shanks for holes prior to tapping screw threads are dealt with in ISO 3439.

#### 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 296, Machine tools — Self-holding tapers for tool shanks https://standards.iteh.ai/catalog/standards/sist/e2208c5f-8d86-4dff-b7df-ISO 2306, Drills for use prior to tapping screw threads 3438-2003


ISO 2768-1, General tolerances — Part 1: Tolerances for linear and angular dimensions without individual tolerance indications

ISO 10899:1996, High-speed steel two-flute twist drills — Technical specifications

#### 3 Dimensions

See Figure 1 and Table 1.

Unless otherwise stated, these drills are right-hand cutting.

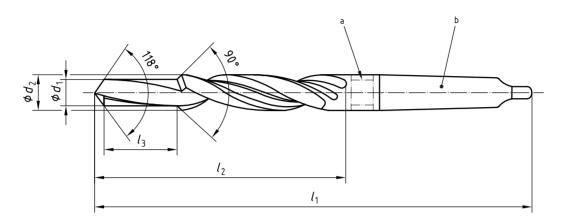

#### <sup>a</sup> Optional recess.

<sup>b</sup> Morse taper in acordance with ISO 296, but with a cone tolerance of AT7 in accordance with ISO 10899:1996, 5.3 and Annex A.

# Figure 1 — Subland twist drill with Morse taper shank (standards.iteh.ai)

## Table 1 — Dimensions of Subland twist drills with Morse taper shanks for holes prior to tapping metric

	c511f77d37fc/iso-3438-2003					Dimensions in millimetres
$d_2$	$d_1$	$l_1^{a}$	$l_2{}^{a}$	$l_3{}^{a}$	Morse taper	Thread
h8	h8				No.	Inteau
9	6,8	162	81	21	1	M8 imes 1,25
11	8,5	175	94	25,5		M10 $ imes$ 1,5
13,5	10,2	189	108	30		M12  imes 1,75
15,5	12	218	120	34,5	2	M14  imes 2
17,5	14	228	130	38,5		M16 $ imes$ 2
20	15,5	238	140	43,5		M18 $ imes$ 2,5
22	17,5	248	150	47,5		M20 $ imes$ 2,5
24	19,5	281	160	51,5	3	M22 imes 2,5
26	21	286	165	56,5		M24  imes 3
30	24	296	175	62,5		M27  imes 3
33	26,5	334	185	70	4	M30 $ imes$ 3,5
<sup>a</sup> The tolerance on overall length $l_1$ and flute lengths $l_2$ and $l_3$ shall be the "very coarse" class as given in ISO 2768-1.						

https://standards.iteh.avcatalog/standards/sist/e2208c5f-8d86-4dff-b7df-

### Bibliography

- [1] ISO 273:1979, Fasteners Clearance holes for bolts and screws
- [2] ISO 3439:2003, Subland twist drills with cylindrical shanks for holes prior to tapping screw threads

# iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 3438:2003 https://standards.iteh.ai/catalog/standards/sist/e2208c5f-8d86-4dff-b7dfc511f77d37fc/iso-3438-2003

# iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 3438:2003 https://standards.iteh.ai/catalog/standards/sist/e2208c5f-8d86-4dff-b7dfc511f77d37fc/iso-3438-2003

ICS 25.100.30 Price based on 3 pages