
Draft ETSI EN 302 500-2 V2.1.1 (2010-01)

Harmonized European Standard (Telecommunications series)

Electromagnetic compatibility
and Radio spectrum Matters (ERM);
Short Range Devices (SRD) using
Ultra WideBand (UWB) technology;
Location Tracking equipment operating in
the frequency range from 6 GHz to 9 GHz;
Part 2: Harmonized EN covering the essential requirements of
article 3.2 of the R&TTE Directive

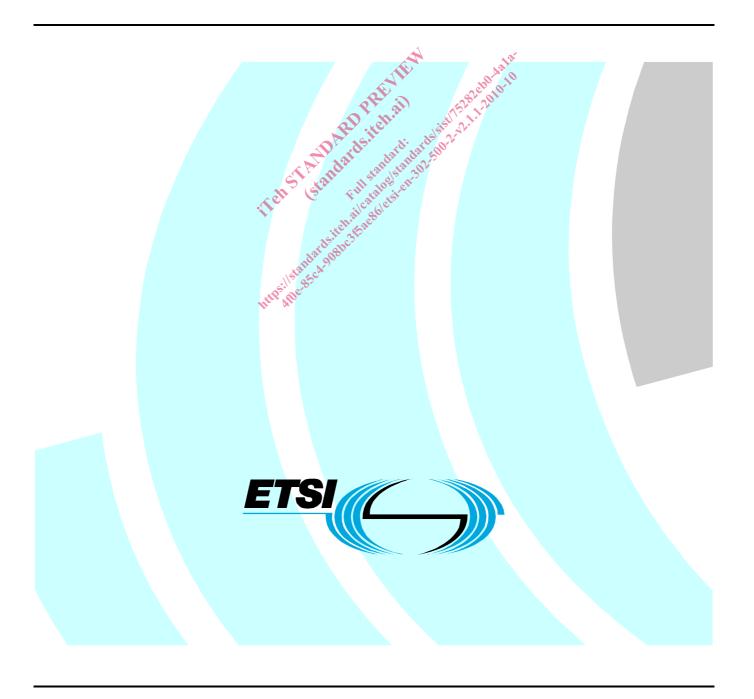

Reference

REN/ERM-TGUWB-009-2

Keywords

radio, regulation, SRD, testing, UWB

ETSI

650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from: http://www.etsi.org

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

http://portal.etsi.org/tb/status/status.asp

If you find errors in the present document, please send your comment to one of the following services: http://portal.etsi.org/chaircor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2010.
All rights reserved.

DECTTM, **PLUGTESTS**TM, **UMTS**TM, **TIPHON**TM, the TIPHON logo and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.

3GPP[™] is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **LTE**[™] is a Trade Mark of ETSI currently being registered

for the benefit of its Members and of the 3GPP Organizational Partners.

GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Contents

Intelle	ctual Property Rights						
1							
2	•						
2							
2.1 2.2							
		S					
		nd abbreviations					
3.1							
3.2							
3.3	Abbreviations						
4	Technical requirement	s specifications	6				
4.1		2					
4.2		ments					
4.2.1		rements					
4.2.1.1		an equivalent isotropically radiated power spectral density					
4.2.1.2		highest maximum mean e.i.r.p. spectral density					
4.2.1.3			_				
4.2.1.4	Indirect Detec	t-And-Avoid (DAA)					
4.2.2	Receiver requiren	nents					
4.2.2.1	Maximum rec	eiver spurious radiations					
5	Testing for compliance	with technical requirements & state of the s	_				
5.1	Environmental condit	tions for testing					
5.2	1.3 Maximum peak equivalent isotropically radiated power 1.4 Indirect Detect-And-Avoid (DAA) 2 Receiver requirements 2.1 Maximum receiver spurious radiations Testing for compliance with technical requirements Environmental conditions for testing Essential radio test suites 1 Transmitter test suites 1 Maximum mean e.i.r.p. spectral density						
5.2.1	Transmitter test su	ites 10 (star cull do lett					
5.2.1.1	Maximum me	an e i ro spectral density	~				
5.2.1.2	Frequency of 1	nighest maximum mean e.ir.p. spectral density	~				
5.2.1.3	Maximum pea	k e.i.r.p.					
5.2.1.4		t-And-Avoid (DAA)					
5.2.2	Receiver test suite	28					
5.2.2.1	Receiver spuri	ous radiations section of the control of the contro					
5.3		surement results					
Annes	x A (normative):	HS Requirements and conformance Test specifications Table					
AIIIIC	a 11 (noi manve).	(HS-RTT)	9				
Anne	x B (informative):	The EN title in the official languages	1				
Anne	x C (informative):	Bibliography	12				
Histor	Annex C (informative): Bibliography						

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (http://webapp.etsi.org/IPR/home.asp).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Harmonized European Standard (Telecommunications series) has been produced by ETSI Technical Committee Electromagnetic compatibility and Radio spectrum Matters (ERM), and is now submitted for the Public Enquiry phase of the ETSI standards Two-step Approval Procedure.

The present document is part 2 of a multi-part deliverable covering Short Range Devices (SRD) using Ultra WideBand (UWB) technology; Location Tracking equipment operating in the frequency range from 6 GHz to 9 GHz, as identified below:

Part 1: "Technical characteristics and methods of measurement";

Part 2: "Harmonized EN covering the essential requirements of article 3.2 of the R&TTE Directive".

The present document has been produced by ETSI in response to a mandate from the European Commission issued under Council Directive 98/34/EC [i.1] (as amended) laying down a procedure for the provision of information in the field of technical standards and regulations.

The present document is intended to become a Harmonized Standard, the reference of which will be published in the Official Journal of the European Communities referencing the Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity ("the R&TTE Directive") [i.2].

Technical specifications relevant to Directive 1999/5/EC [i.2] are given in annex A.

Proposed national transposition dates						
Date of latest announcement of this EN (doa):	3 months after ETSI publication					
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	6 months after doa					
Date of withdrawal of any conflicting National Standard (dow):	18 months after doa					

1 Scope

The present document specifies the requirements for ultra-wideband Location Tracking equipment operating in all or part of the frequency range from 6 GHz to 9 GHz.

The present document applies for indoor as well as portable or mobile outdoor applications.

It covers ultra-wideband location tracking tags which are attached to people or objects and are tracked using a fixed receiver infrastructure to only receive the UWB emission by the tags. Equipment covered by the present document is fitted with an integral or dedicated antenna.

The present document is intended to cover the provisions of article 3.2 of Directive 1999/5/EC [i.2] R&TTE Directive, which states that "... radio equipment shall be so constructed that it effectively uses the spectrum allocated to terrestrial/space radio communications and orbital resources so as to avoid harmful interference".

In addition to the present document, other ENs that specify technical requirements in respect of essential requirements under other parts of article 3 of the R&TTE Directive may apply to equipment within the scope of the present document.

NOTE: A list of such ENs is included on the web site http://www.newapproach.org.

2 References

References are either specific (identified by date of publication and/or edition number or version number) or non-specific.

- For a specific reference, subsequent revisions do not apply.
- Non-specific reference may be made only to a complete document or a part thereof and only in the following cases:
 - if it is accepted that it will be possible to use all future changes of the referenced document for the purposes of the referring document;
 - for informative references.

Referenced documents which are not found to be publicly available in the expected location might be found at http://docbox.etsi.org/Reference.

NOTE: While any hyperlinks included in this clause were valid at the time of publication ETSI cannot guarantee their long term validity.

2.1 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For non-specific references, the latest edition of the referenced document (including any amendments) applies.

[1] ETSI EN 302 500-1 (V2.1.1): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Short Range Devices (SRD) using Ultra WideBand (UWB) technology; Location Tracking equipment operating in the frequency range from 6 GHz to 9 GHz; Part 1: Technical requirements and methods of measurement".

2.2 Informative references

The following referenced documents are not essential to the use of the ETSI deliverable but they assist the user with regard to a particular subject area. For non-specific references, the latest version of the referenced document (including any amendments) applies.

- [i.1] Directive 98/34/EC of the European Parliament and of the Council of 22 June 1998 laying down a procedure for the provision of information in the field of technical standards and regulations.
- [i.2] Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity (R&TTE Directive).

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in the R&TTE Directive [i.2] and EN 302 500-1 [1] apply.

3.2 Symbols

For the purposes of the present document, the symbols given in EN 302 500-1 [1] apply.

3.3 Abbreviations

For the purposes of the present document, the abbreviations given in EN 302 500-1 [1] apply.

4 Technical requirements specifications

4.1 Environmental profile

The technical requirements of the present document apply under the environmental profile for operation of the equipment, which shall be declared by the provider. The equipment shall comply with all the technical requirements of the present document at all times when operating within the boundary limits of the declared operational environmental profile.

4.2 Conformance requirements

4.2.1 Transmitter requirements

4.2.1.1 Maximum mean equivalent isotropically radiated power spectral density

The maximum mean equivalent isotropically radiated power (e.i.r.p.) spectral density shall not exceed the limits specified in clause 8.1.3 of EN 302 500-1 [1].

This requirement applies to all transmitters.

4.2.1.2 Frequency of highest maximum mean e.i.r.p. spectral density

The frequency of the highest maximum mean equivalent isotropically radiated power (e.i.r.p.) spectral density shall not lie outside the limits specified in EN 302 500-1 [1], clause 8.2.3.

This requirement applies to all transmitters.

4.2.1.3 Maximum peak equivalent isotropically radiated power

The maximum peak equivalent isotropically radiated power (e.i.r.p.) shall not exceed the limits specified in clause 8.3.3 of EN 302 500-1 [1].

This requirement applies to all transmitters.

4.2.1.4 Indirect Detect-And-Avoid (DAA)

The equipment shall meet the design requirements for Indirect Detect-And-Avoid (DAA) as specified in EN 302 500-1 [1], clause 8.4.2.

Furthermore, the maximum mean equivalent isotropically radiated power (e.i.r.p.) spectral density and maximum peak e.i.r.p., as measured in Non-Interference Mode and non-NIM operation mode, shall not exceed the limits specified in clause 8.4.4 of EN 302 500-1 [1].

This requirement applies to all transmitters operating in the range 8,5 GHz to 9 GHz.

4.2.2 Receiver requirements

4.2.2.1 Maximum receiver spurious radiations

The receiver spurious radiations as defined in EN 302 500-111], clause 9.1.1, shall not exceed the limit specified in EN 302 500-1 [1], clause 9.1.3.

5 Testing for compliance with technical requirements

5.1 Environmental conditions for testing

Tests defined in the present document shall be carried out at representative points within the boundary limits of the declared operational environmental profile.

Where technical performance varies subject to environmental conditions, tests shall be carried out under a sufficient variety of environmental conditions (within the boundary limits of the declared operational environmental profile) to give confidence of compliance for the affected technical requirements.

5.2 Essential radio test suites

5.2.1 Transmitter test suites

5.2.1.1 Maximum mean e.i.r.p. spectral density

The test defined in clause 8.1.2 of EN 302 500-1 [1] shall be carried out.

This test suite applies to all transmitters.

5.2.1.2 Frequency of highest maximum mean e.i.r.p. spectral density

The test defined in clause 8.2.2 of EN 302 500-1 [1] shall be carried out.

This test suite applies to all transmitters.

5.2.1.3 Maximum peak e.i.r.p.

The test defined in clause 8.3.2 of EN 302 500-1 [1] shall be carried out.

This test suite applies to all transmitters.

5.2.1.4 Indirect Detect-And-Avoid (DAA)

The tests defined in clause 8.4.3 of EN 302 500-1 [1] shall be carried out.

This requirement applies to all transmitters operating in the range 8,5 GHz to 9 GHz.

5.2.2 Receiver test suites

5.2.2.1 Receiver spurious radiations

The test defined in clause 9.1.2 of EN 302 500-1 [1], shall be carried out.

5.3 Interpretation of measurement results

Clause 7 of EN 302 500-1 [1] shall apply.

Annex A (normative):

HS Requirements and conformance Test specifications Table (HS-RTT)

The HS Requirements and conformance Test specifications Table (HS-RTT) in table A.1 serves a number of purposes, as follows:

- it provides a statement of all the requirements in words and by cross reference to (a) specific clause(s) in the present document or to (a) specific clause(s) in (a) specific referenced document(s);
- it provides a statement of all the test procedures corresponding to those requirements by cross reference to (a) specific clause(s) in the present document or to (a) specific clause(s) in (a) specific referenced document(s);
- it qualifies each requirement to be either:
 - Unconditional: meaning that the requirement applies in all circumstances; or
 - Conditional: meaning that the requirement is dependent on the manufacturer having chosen to support optional functionality defined within the schedule.
- in the case of Conditional requirements, it associates the requirement with the particular optional service or functionality;
- it qualifies each test procedure to be either:
 - Essential: meaning that it is included with the Essential Radio Test Suite and therefore the requirement shall be demonstrated to be met in accordance with the referenced procedures;
 - Other: meaning that the test procedure is illustrative but other means of demonstrating compliance with the requirement are permitted.

Table A.1: HS Requirements and conformance Test specifications Table (HS-RTT)

Harmonized Standard EN 302 500-2										
The following requirements and test specifications are relevant to the presumption of conformity										
under the article 3.2 of the R&TTE Directive										
	Requirement 🚕	1, 6,	Requirement Conditionality		Test Specification					
No	Description	Reference: Clause No	U/C	Condition	E/O	Reference: Clause No				
1	Maximum mean equivalent isotropically radiated power spectral density	4.2.1.1	U		Е	5.2.1.1				
2	Frequency of highest maximum mean e.i.r.p. spectral density	4.2.1.2	U		Е	5.2.1.2				
3	Maximum peak e.i.r.p.	4.2.1.3	U		Е	5.2.1.3				
4	Indirect Detect-And-Avoid (DAA)	4.2.1.4	С	Applies for equipment operating in the range 8,5 GHz to 9 GHz	E	5.2.1.4				
5	Maximum receiver spurious radiations	4.2.2.1	U		Е	5.2.2.1				

Key to columns:

Requirement:

No A unique identifier for one row of the table which may be used to identify a requirement or its test

specification.

Description A textual reference to the requirement.