INTERNATIONAL STANDARD



First edition 2003-10-15

Footwear — Test methods for uppers and lining — Water vapour permeability and absorption

Chaussures — Méthodes d'essai des tiges et des doublures — Perméabilité à la vapeur d'eau et absorption de la vapeur d'eau

iTeh STANDARD PREVIEW (standards.iteh.ai)

<u>ISO 17699:2003</u> https://standards.iteh.ai/catalog/standards/sist/dfe57e50-202b-4e37-bbd2-1bb1fc8b0441/iso-17699-2003



Reference number ISO 17699:2003(E)

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 17699:2003 https://standards.iteh.ai/catalog/standards/sist/dfe57e50-202b-4e37-bbd2-1bb1fc8b0441/iso-17699-2003

© ISO 2003

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office Case postale 56 • CH-1211 Geneva 20 Tel. + 41 22 749 01 11 Fax + 41 22 749 09 47 E-mail copyright@iso.org Web www.iso.org Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 17699 was prepared by CEN (as EN 13515:2001) and was adopted, under a special "fast-track procedure", by Technical Committee ISO/TC 216, *Footwear*, in parallel with its approval by the ISO member bodies.

For the purposes of international standardization, a list of corresponding International and European Standards for which equivalents are not given in EN 13515 has been added as Annex ZZ.

ISO 17699:2003 https://standards.iteh.ai/catalog/standards/sist/dfe57e50-202b-4e37-bbd2-1bb1fc8b0441/iso-17699-2003 ISO 17699:2003(E)

EN 13515:2001 (E)

Contents

Foreword		
1	Scope	4
2	Normative references	
3	Terms and definitions	4
4 4.1 4.2	Apparatus and material Water vapour permeability test method Water vapour absorption test method (see Figure 2)	4
5 5.1 5.2	Sampling and conditioning Water vapour permeability test method Water vapour absorption test method	7
6 6.1 6.2	Test method Water vapour permeability test method Water vapour absorption test method	8
7 7.1 7.2	Water vapour absorption test method iTeh STANDARD PREVIEW Expression of results Water vapour permeability test method	10 10 10
8 8.1 8.2	Test report <u>ISO 17699-2003</u> . Water vapour permeability fest method alog/standards/sist/dfs57e50-202b-4e37-bbd2 Water vapour absorption test method 168b0441/iso-17699-2003.	11 11

Foreword

This European Standard has been prepared by Technical Committee CEN/TC 309 "Footwear", the secretariat of which is held by AENOR.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by June 2002, and conflicting national standards shall be withdrawn at the latest by June 2002.

This European Standard is based on the IUP 15 method and the European Standard EN 344-1 "Requirements and test methods for safety, protective and occupational footwear for professional use.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and the United Kingdom.

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 17699:2003 https://standards.iteh.ai/catalog/standards/sist/dfe57e50-202b-4e37-bbd2-1bb1fc8b0441/iso-17699-2003

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 17699:2003 https://standards.iteh.ai/catalog/standards/sist/dfe57e50-202b-4e37-bbd2-1bb1fc8b0441/iso-17699-2003

1 Scope

This standard specifies two test methods for assessing, respectively, the water vapour permeability and the water vapour absorption of uppers or complete upper assembly irrespective of the material, in order to assess the suitability for the end use.

2 Normative references

This European Standard incorporates by dated or undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text, and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this European Standard only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies (including amendments).

EN 12222, Footwear - Standard atmospheres for conditioning and testing of footwear and components for footwear.

EN ISO 3696, Water for analytical laboratory use - Specification and test methods (ISO 3696:1987).

EN 13512, Footwear - Test methods for uppers and lining - Flex resistance.

3 Terms and definitions

For the purposes of this European Standard, the following terms and definitions apply.

3.1

water vapour permeability

amount of water vapour a material will transmit through its structure expressed as mass of water transmitted per area of material per hour https://standards.iteh.ai/catalog/standards/sist/dfe57e50-202b-4e37-bbd2-1bb1fc8b0441/iso-17699-2003

3.2

water vapour absorption

amount of water vapour a material will absorb in a specified time expressed as mass of water per area of material

3.3

upper

material forming the outer face of the footwear which is attached to the sole assembly and covers the upper dorsal surface of the foot. In case of boots, this also includes the outer face of the material covering the leg. Only the materials that are visible are included, no account should be taken of underlying materials

3.4

complete upper assembly

finished upper, fully seamed, joined or laminated as appropriate, comprising the centre material and any lining(s) together with all components such as interlinings, adhesives, membranes, foams or reinforcements, but excluding toe puffs and stiffners

NOTE The complete upper assembly may be flat, 2-dimensional or comprise lasted upper in the final footwear.

Apparatus and material 4

The following apparatus and material shall be used:

4.1 Water vapour permeability test method

Cylindrical test pots each with an internal height of 80 mm \pm 10 mm and internal volume of 100 cm³ \pm 20 4.1.1 cm³, and including the following:

(standards.iteh.ai)

ISO 17699:2003(E)

4.1.1.1 One circular open end with an internal diameter of $D = 30 \text{ mm} \pm 1 \text{ mm}$ and is known to the nearest 0,1 mm.

4.1.1.2 A clamping ring with an internal diameter *D*.

4.1.1.3 Means of tightly clamping a test specimen between the clamping ring and the open end so that the pot is sealed by the test specimen.

4.1.2 Test machine (see Figure 1) including the following:

4.1.2.1 Vertically mounted turntable which:

a) has at least three test stations, each of which is capable of holding a test pot so that its axis is parallel to, and 67 mm \pm 2 mm from the axis of rotation of the turntable;

b) is rotated at 7,8 rad/s \pm 0,5 rad/s¹⁾

4.1.2.2 Paddle type fan which:

a) has three flat blades inclined at 120° to one another. The blades shall be flat with approximate dimensions 90 mm x 75 mm;

b) is mounted so that its axle is coaxially aligned with the axis of the turntable (see 4.1.2.1) and the blades pass within a distance of 10 mm \pm 5 mm of the open ends of test pots (see 4.1.1) mounted on the turntable;

c) is rotated at 146 rad/s \pm 10 rad/s¹⁾ in a direction opposite to the direction of rotation of the turntable.

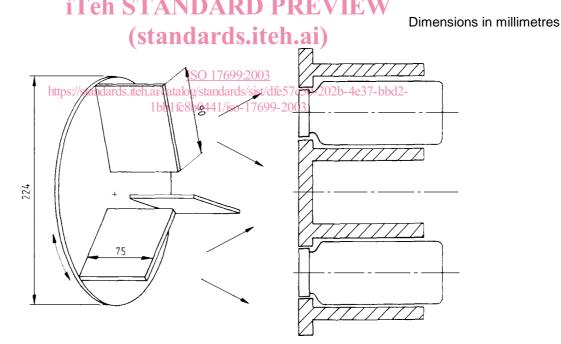


Figure 1 — Schematic diagram of apparatus to be used in the water vapour permeability test

4.1.3 Analytical balance capable of measuring mass up to 200 g to the nearest 1 mg.

4.1.4 Silica gel with a particle size greater than 2 mm and which is preferably self indicating.

Freshly dry the silica gel in a ventilated oven at 125° C $\pm 5^{\circ}$ C for at least 16 h and cool in a sealed container for at least 6 h. Once dried the silica gel will remain dry for many days if kept in air tight containers. Typically the colour of self indicating silica gel will turn from blue when dry to pink or colourless when saturated.

^{1) 1} rad \approx 0,16 rev.

EN 13515:2001 (E)

4.1.5 Press knife, or similar cutting device, capable of cutting test specimens with a diameter which is sufficiently larger than *D* to enable a good seal to be made around the open end (see 4.1.1.1) of the pot.

4.2 Water vapour absorption test method (see Figure 2)

4.2.1 Two round test pots each with a volume of $100 \text{ cm}^3 \pm 20 \text{ cm}^3$, and including the following:

4.2.1.1 One open end with a flat annular surface of internal diameter of 35,0 mm \pm 0,5 mm and external diameter of at least 20 mm larger. The external diameter can be provided by a flange of minimum width 10 mm or by a cylinder of minimum wall thickness 10 mm.

4.2.1.2 A metal disk of diameter greater than 55 mm.

4.2.1.3 Means of tightly clamping a test specimen and a piece of impermeable material (see 4.2.5) between the open end and the disk so that the pot is sealed by the test specimen.

4.2.2 Analytical balance capable of measuring mass up to 100 g to the nearest 1 mg.

4.2.3 Device capable of measuring time up to 8 h to the nearest 0,1 h, e.g., a stopwatch.

- **4.2.4** Distilled or deionised water complying with EN ISO 3696.
- **4.2.5** Two circular pieces of impermeable material of minimum diameter 55 mm.
- **4.2.6** Cutting device such as a press knife, capable of cutting test specimens of/diameter 45 mm ± 5 mm.

(standards.iteh.ai)

<u>ISO 17699:2003</u> https://standards.iteh.ai/catalog/standards/sist/dfe57e50-202b-4e37-bbd2-1bb1fc8b0441/iso-17699-2003