
**Footwear — Test methods for uppers,
lining and insoles — Thermal insulation**

*Chaussures — Méthodes d'essai des tiges, de la doublure et des
premières de propreté — Isolation thermique*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 17705:2003](https://standards.iteh.ai/catalog/standards/sist/4bdbef6f-64c6-4f93-9aaa-2f7604181c24/iso-17705-2003)

[https://standards.iteh.ai/catalog/standards/sist/4bdbef6f-64c6-4f93-9aaa-
2f7604181c24/iso-17705-2003](https://standards.iteh.ai/catalog/standards/sist/4bdbef6f-64c6-4f93-9aaa-2f7604181c24/iso-17705-2003)



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 17705:2003

<https://standards.iteh.ai/catalog/standards/sist/4bdbef6f-64c6-4f93-9aaa-2f7604181c24/iso-17705-2003>

© ISO 2003

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 17705 was prepared by CEN (as EN 13521:2001) and was adopted, under a special “fast-track procedure”, by Technical Committee ISO/TC 216, *Footwear*, in parallel with its approval by the ISO member bodies.

iTeh STANDARD PREVIEW

For the purposes of international standardization, a list of corresponding International and European Standards for which equivalents are not given in EN 13521 has been added as Annex ZZ.

ISO 17705:2003

<https://standards.iteh.ai/catalog/standards/sist/4bdbef6f-64c6-4f93-9aaa-2f7604181c24/iso-17705-2003>

Contents

	page
Foreword.....	3
1 Scope	4
2 Normative references	4
3 Terms and definitions.....	4
4 Apparatus and material	4
5 Sampling and conditioning.....	6
6 Test method.....	6
6.1 Principle	6
6.2 Procedure	6
7 Expression of results	7
8 Test report	8

iTeh STANDARD PREVIEW
(standards.iteh.ai)

<https://standards.iteh.ai/catalog/standards/sist/4bdbef6f-64c6-4f93-9aaa-2f7604181c24/iso-17705-2003>

Foreword

This European Standard has been prepared by Technical Committee CEN/TC 309 "Footwear", the secretariat of which is held by AENOR.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by May 2002, and conflicting national standards shall be withdrawn at the latest by May 2002.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and the United Kingdom.

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 17705:2003

<https://standards.iteh.ai/catalog/standards/sist/4bdbef6f-64c6-4f93-9aaa-2f7604181c24/iso-17705-2003>

iTeh STANDARD PREVIEW **(standards.iteh.ai)**

ISO 17705:2003

<https://standards.iteh.ai/catalog/standards/sist/4bdbef6f-64c6-4f93-9aaa-2f7604181c24/iso-17705-2003>

EN 13521:2001 (E)

1 Scope

This European Standard specifies a test method for determining the thermal conductivity of uppers, lining and insoles irrespective of the material, in order to assess the suitability for the end use.

2 Normative references

This European Standard incorporates by dated or undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text, and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this European Standard only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies (including amendments).

EN 12222 *Footwear - Standard atmospheres for conditioning and testing of footwear and components for footwear.*

3 Terms and definitions

For the purposes of this European Standard, the following terms and definitions apply.

3.1

thermal insulation

thermal conductivity of a material under static conditions

3.2

upper

materials forming the outer surface of the footwear which is attached to the sole assembly and covers the upper dorsal surface of the foot. In the case of boots, this also includes the outer face of the material covering the leg. Only the materials that are visible are included, no account should be taken of underlying materials

3.3

complete upper assembly

finished upper, fully seamed, joined or laminated as appropriate, comprising the centre material and any lining(s) together with all components such as interlinings, adhesives, membranes, foams or reinforcements, but excluding toe puffs and stiffeners

NOTE The complete upper assembly can be flat, 2-dimensional or comprise lasted upper in the final footwear.

4 Apparatus and material

The following apparatus and material shall be used:

4.1 “Lees’ disc” apparatus, see Figure 1, including the following:

4.1.1 Cylindrical brass block, which will subsequently be referred to as block B1, with:

4.1.1.1 Diameter of approximately 75 mm which is known with an accuracy of 0,2 mm.

4.1.1.2 Height of approximately 25 mm which is known with an accuracy of 0,2 mm.

4.1.1.3 Hole of diameter 2 mm $\pm$ 0,1 mm drilled radially to its centre.

4.1.1.4 Type K thermocouple inserted into the hole until its junction is at the bottom of the hole.

4.1.1.5 Remaining volume of the hole shall be filled with a high thermal conductivity compound with a thermal conductivity of better than 0,8 W/(m °C), for example a metal oxide filled paste of the type used between high power semiconductor electronic devices and heat sinks.

4.1.2 Circular electrical heater element which:

4.1.2.1 Has a diameter the same as that of the blocks in 4.1.1, with a tolerance of $\pm 0,5$ mm.

4.1.2.2 Is capable of dissipating a minimum power density of 400 W/m² from each of its circular faces.

4.1.2.3 Has a cylindrical brass block and thermocouple of the same dimensions as block B1 bonded to both its top and bottom faces with a high thermal conductivity adhesive compound. These two blocks will subsequently be referred to as B2 and B3.

4.1.3 A fourth cylindrical brass block fitted with a thermocouple as in 4.1.1 of the same diameter as block B1 but of height (8 ± 2) mm. This is for measuring the ambient temperature of the surrounding atmosphere and will subsequently be referred to as block B4.

4.1.4 A power supply unit connected to the heater element (4.1.2). The unit should be capable of supplying sufficient power to enable the heater element to dissipate a power density of 400 W/m² from each of its circular faces.


4.1.5 Means of measuring the power being supplied to the heater element to an accuracy of ± 4 mW.

4.1.6 Means of mounting the heater and block assembly so that air can circulate freely around all the outside edges of the assembly.

4.1.7 Device capable of measuring and displaying the temperatures of the thermocouples in the four brass cylindrical blocks to an accuracy of $\pm 0,2$ °C.

4.2 Circular press knife or similar device for cutting circular test specimens of the same diameter as the block B1, with a tolerance of $\pm 0,5$ mm.

4.3 Dial thickness gauge which applies a pressure of $(2,0 \pm 0,2)$ kPa to the test specimen and is capable of measuring to the nearest 0,01 mm.

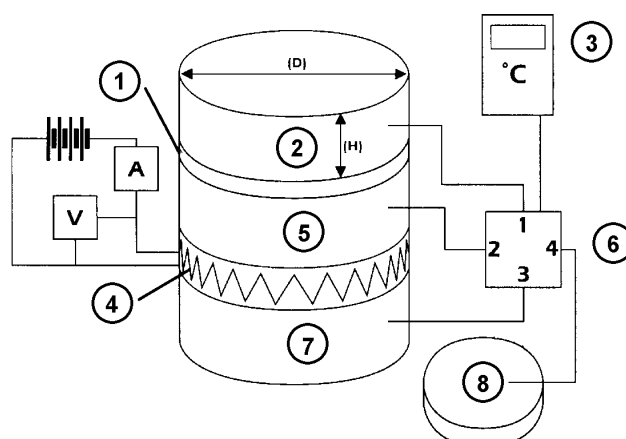

Key

- 1 Test specimen
- 2 Block B1
- 3 Temperature display
- 4 Heater
- 5 Block B2
- 6 Switching device
- 7 Block B3
- 8 Block B4

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Figure 1 — Lees' disc thermal conductivity apparatus

<https://standards.iteh.ai/catalog/standards/sist/4bdf6f6f-64c6-4f93-9aaa-2f7604181c24/iso-17705-2003>

5 Sampling and conditioning

5.1 Store the uncut sheet material in a conditioned standard atmosphere as specified in EN 12222 for at least 48 h prior to cutting test specimens.

5.2 Cut two circular test specimens of the same diameter as the metal block B1, with a tolerance of $\pm 0,5$ mm.

NOTE Test specimens can be taken either from materials likely to be used for uppers and linings or from made-up uppers or finished footwear. Prepare test specimens from complete upper assemblies when the lining material is permanently attached to the upper material.

6 Test method

6.1 Principle

A constant heat source is sandwiched between two identical metal cylinders which are mounted with their axes vertical. A test specimen is placed on the top surface of the upper cylinder and a third identical metal cylinder is placed on top of the test specimen so that all the cylinders and the test specimen are concentrically aligned. The heat source is switched on and the temperatures of the three blocks allowed to reach equilibrium. The thermal conductivity of the test specimen is then determined from the steady state temperatures of the three blocks, the exposed surface areas of the blocks and test specimen and the thickness of the test specimen.

6.2 Procedure

6.2.1 Use the thickness gauge (4.3) to measure the thickness S , in mm, at the centre of each test specimen and record these two values to the nearest 0,05 mm.