

SLOVENSKI STANDARD

SIST EN 488:2011

01-oktober-2011

Nadomešča:
SIST EN 488:2004

Cevi za daljinsko ogrevanje - Izolirani vezani cevni sistemi za podzemeljska toplovodna omrežja - Sestav jeklenih ventilov za jeklene cevi, poliuretanske toplotne izolacije in zunanjega polietilenskega plašča

District heating pipes - Preinsulated bonded pipe systems for directly buried hot water networks - Steel valve assembly for steel service pipes, polyurethane thermal insulation and outer casing of polyethylene

Fernwärmerohre - Werkmässig gedämmte Verbundmantelrohrsysteme für direkt erdverlegte Fernwärmenetze - Vorgeämmte Absperrarmaturen für Stahlmediumrohre mit Polyurethan-Wärmedämmung und Außenmantel aus Polyethylen

Tuyaux de chauffage urbain - Systèmes bloqués de tuyaux préisolés pour les réseaux d'eau chaude enterrés directement - Robinets préisolés pour tubes de service en acier, isolation thermique en polyuréthane et tube de protection en polyéthylène

Ta slovenski standard je istoveten z: EN 488:2011

ICS:

23.040.10	Železne in jeklene cevi	Iron and steel pipes
23.060.01	Ventili na splošno	Valves in general
91.140.65	Oprema za ogrevanje vode	Water heating equipment

SIST EN 488:2011

en,fr,de

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 488:2011

<https://standards.iteh.ai/catalog/standards/sist/0dad307d-ed00-4e53-8e78-3806189482c6/sist-en-488-2011>

EUROPEAN STANDARD

EN 488

NORME EUROPÉENNE

EUROPÄISCHE NORM

March 2011

ICS 23.060.01

Supersedes EN 488:2003

English Version

District heating pipes - Preinsulated bonded pipe systems for directly buried hot water networks - Steel valve assembly for steel service pipes, polyurethane thermal insulation and outer casing of polyethylene

Tuyaux de chauffage urbain - Systèmes bloqués de tuyaux préisolés pour les réseaux d'eau chaude enterrés directement - Robinets préisolés pour tubes de service en acier, isolation thermique en polyuréthane et tube de protection en polyéthylène

Fernwärmerohre - Werkmäßig gedämmte Verbundmantelsysteme für direkt erdverlegte Fernwärmenetze - Vorgeämmte Absperrarmaturen für Stahlmediumrohre mit Polyurethan-Wärmedämmung und Außenmantel aus Polyethylen

This European Standard was approved by CEN on 19 February 2011.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents

Page

Foreword.....	4
1 Scope	7
2 Normative references	7
3 Terms and definitions	7
4 Requirements	9
4.1 Pressure ratings for valves.....	9
4.1.1 General.....	9
4.1.2 Valves without indicated flow direction	9
4.2 Service temperatures for valves	9
4.3 Steel parts.....	9
4.3.1 General.....	9
4.3.2 Valve.....	10
4.3.3 Valve extension pipe	10
4.3.4 Welding ends.....	10
4.3.5 Welding of steel parts	10
4.4 Casing	10
4.4.1 General.....	10
4.4.2 Requirements for polyethylene welding	10
4.4.3 Diameter and wall thickness of the casing	10
4.5 Polyurethane rigid foam insulation (PUR)	10
4.5.1 General.....	10
4.5.2 Minimum insulation thickness	10
4.6 Valve assembly	11
4.6.1 Ends of valve assembly	11
4.6.2 End of stem construction	11
4.6.3 Main dimensions of the valve assembly	12
4.6.4 Installation of measuring elements.....	13
4.7 Requirements for effective operation and maintenance	13
4.8 Resistance to axial forces and bending moments	14
5 Testing, test methods and test requirements.....	14
5.1 General.....	14
5.2 Test specimens	14
5.2.1 General.....	14
5.2.2 Test specimens for type testing steel parts of valve	14
5.2.3 Test specimens from casings and polyurethane foam.....	14
5.3 Steel parts.....	14
5.3.1 General.....	14
5.3.2 Type test of the steel parts	14
5.3.3 Production testing of valves.....	17
5.4 Casing	17
5.4.1 General.....	17
5.4.2 Leak-tightness of the welded casing	17
5.5 Polyurethane rigid foam insulation.....	17
5.6 Valve assembly	18
5.7 Surveillance system	18
6 Marking	18
6.1 General.....	18
6.2 Steel valve	18
6.3 Casing	18

6.4	Valve assembly.....	18
7	Installation and maintenance	19
Annex A	(informative) Guidelines for inspection and testing	20
A.1	General	20
A.2	Manufacturer's type test	20
A.3	Manufacturer's quality control	20
A.4	External inspection	20
A.5	Extent of inspection	20
A.6	Manufacturer's responsibility	20
Annex B	(normative) Resistance to axial force and bending moment.....	23
B.1	Axial strength test	23
B.2	Bending test.....	23
Annex C	(normative) Resistance to bending forces	25
C.1	Resistance to bending forces	25
C.1.1	General	25
C.1.2	Formulas based on the considerations	25
C.1.3	Standard test assembly (four point bending test)	27
C.1.3.1	Bending moment from test load.....	27
C.1.3.2	Bending Moment from uniform load q (pipe weight and where appropriate water weight)	28
C.1.3.3	Bending moment from valve weight.....	29
C.1.3.4	Total Bending Moment (M_{total}) due to F, P and F_v.....	29
C.1.4	Alternative test assembly (for diameters \leq DN 200 mm) – Maximum bending moment	30
Bibliography	32

iTeh STANDARD PREVIEW

(standards.iteh.ai)

SIST EN 488:2011

<https://standards.iteh.ai/catalog/standards/sist/0dad307d-ed00-4e53-8e78-3806189482c6/sist-en-488-2011>

EN 488:2011 (E)**Foreword**

This document (EN 488:2011) has been prepared by Technical Committee CEN/TC 107 "Prefabricated district heating pipe systems", the secretariat of which is held by DS.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by September 2011, and conflicting national standards shall be withdrawn at the latest by September 2011.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

This document supersedes EN 488:2003.

Annex A is informative, Annexes B and C are normative.

This document includes a Bibliography.

The first edition of EN 488 was approved in 1994. The first revised standard was published in 2003. In this second revision, in general the whole standard has been edited to make it more readable. Requirements and test methods have been separated; therefore, clause numbers have changed and some clauses have been split up in several clauses. Exact references for changes are not always possible. The main areas of the current revision are:

- a) The scope has been amended. The standard applies no longer only to insulated valve assemblies for continuous operation with hot water at various temperatures in accordance with EN 253:2009, Clause 1 but also to the valve assemblies with a maximum operation pressure of 25 bar. For higher pressure, additional demands apply. It is also explained that the calculation rules of loads and stresses are not included. They depend on the configuration of the system as it is installed. The design and installation rules are given in EN 13941:2009+A1:2010.
- b) In Clause 3, "terms and definitions", definitions for the nominal pressure (PN), nominal size (DN) and maximum operation pressure have been added. A figure "Example valve assembly components" of a valve assembly, its components and definitions has been added.
- c) Clause 4, "requirements"
 - 1) material of the steel parts in the pressurized parts of the valve shall be certified in accordance with EN 10204, the 3.1 certificate (4.3.1);
 - 2) it is added that flanged or screwed connections, except sealing system at the stem, shall not be used except in the non-pressurized area e.g. for the stem extensions (4.3.2);
 - 3) the requirements for the use of stop devices are amended (4.7);
 - 4) the minimum water temperature has been adjusted to 4 °C (4.2);
 - 5) 4.3.5 "Welding of steel parts" has been changed and adjusted to EN 13941:2009+A1:2010 and the text in EN 448;
 - 6) 4.1.6 has become 4.8 "resistance to axial forces bending moments" and has been rewritten in Annex B;
 - 7) additions have been made to the requirements to the corrosion protection of the stem (see 4.6);

- 8) the Clause "increase in diameter" has been changed to "diameter and wall thickness of the casing" (see 4.4.3);
 - 9) a table with the tolerances of the main dimensions has been added together with a figure to explain the dimensions (see 4.6.3);
 - 10) a clause was added about the installation of measuring elements for surveillance (see 4.6.4).
- d) Clause 5, "test methods"
- 1) the clause "Testing, test methods and test requirements" has been adjusted to make the order of test clearer;
 - 2) a test for the surveillance system is added (see 5.7).
- e) Clause 6, "marking"
- 1) for the steel valve pressure and temperature and marking with closed and open position;
 - 2) for the casing the date of manufacture has been changed to year and week of manufacture (see 6.3);
 - 3) for the valve assembly, the type of blowing agent and diffusion barrier has been added (see 6.4).
- f) Annex A, "guidelines for inspection and testing"
- 1) the clause about quality surveillance had been changed in quality control (see A.3);
 - 2) a table for the valve assembly inspection had been added.
- g) Former Annex B, the guidelines for installation of the valves has been deleted. New Annexes B and C have been added, in which the actual testing is included.
- h) The former Table 1, "Service pipe dimensions and test forces" has been changed due to cold laying conditions. Therefore, the compressive forces have been adapted. In this table the maximum allowable bending moments have been included and the table has been moved to Annex B.
- i) A description of the test method for bending forces has been added in Annex C.

In general, references were changed where needed. If possible references to European standards were used.

For information on the minimum expected thermal life with operation at various temperatures with respect to PUR foam performance see EN 253.

The other standards from CEN/TC 107 covering this subject are:

- EN 253, *District heating pipes — Preinsulated bonded pipe systems for directly buried hot water networks — Pipe assembly of steel service pipe, polyurethane thermal insulation and outer casing of polyethylene;*
- EN 448, *District heating pipes — Preinsulated bonded pipe systems for directly buried hot water networks — Fitting assemblies of steel service pipes, polyurethane thermal insulation and outer casing of polyethylene;*
- EN 489, *District heating pipes — Preinsulated bonded pipe systems for directly buried hot water networks — Joint assembly for steel service pipes, polyurethane thermal insulation and outer casing of polyethylene;*

EN 488:2011 (E)

- EN 13941:2009+A1:2010, *Design and installation of preinsulated bonded pipe systems for district heating*;
- EN 14419, *District heating pipes — Preinsulated bonded pipe systems for directly buried hot water networks — Surveillance systems*;
- EN 15632 (all parts), *District heating pipes — Pre-insulated flexible pipe systems*;
- EN 15698-1, *District heating pipes — Preinsulated bonded twin pipe systems for directly buried hot water networks — Part 1: Twin pipe assembly of steel service pipe, polyurethane thermal insulation and outer casing of polyethylene*.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST EN 488:2011](https://standards.iteh.ai/catalog/standards/sist/0dad307d-ed00-4e53-8e78-3806189482c6/sist-en-488-2011)

<https://standards.iteh.ai/catalog/standards/sist/0dad307d-ed00-4e53-8e78-3806189482c6/sist-en-488-2011>

1 Scope

This European Standard specifies requirements and test methods for valves of prefabricated thermally insulated valve assemblies comprising a steel valve, rigid polyurethane foam insulation and an outer casing of polyethylene for use in directly buried hot water networks with pre-insulated pipe assemblies in accordance with EN 253.

This European Standard applies only to insulated valve assemblies for continuous operation with hot water at various temperatures in accordance with EN 253:2009, Clause 1 and the valve assemblies with a maximum operation pressure of 25 bar. For higher pressures, additional demands apply.

Guidelines for quality inspection are given in Annex A of this European Standard.

NOTE For this application, the following valve types are commonly used: ball valves, gate valves, and butterfly valves.

This European Standard does not include calculation rules for loads and stresses. These depend on the configuration of the system as it is installed. The design and installation rules are given in EN 13941:2009+A1:2010.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 19, *Industrial valves — Marking of metallic valves*

EN 253:2009, *District heating pipes — Preinsulated bonded pipe systems for directly buried hot water networks — Pipe assembly of steel service pipe, polyurethane thermal insulation and outer casing of polyethylene*

EN 448:2009, *District heating pipes — Preinsulated bonded pipe systems for directly buried hot water networks — Fitting assemblies of steel service pipes, polyurethane thermal insulation and outer casing of polyethylene*

EN 736-1:1995, *Valves — Terminology — Part 1: Definition of types of valves*

EN 10204:2004, *Metallic products — Types of inspection documents*

EN 12266-1:2003, *Industrial valves — Testing of valves — Part 1: Pressure tests, test procedures and acceptance criteria — Mandatory requirements*

EN 13941:2009+A1:2010, *Design and installation of preinsulated bonded pipe systems for district heating*

EN 14419, *District heating pipes — Preinsulated bonded pipe systems for directly buried hot water networks — Surveillance systems*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in EN 253:2009 and EN 448:2009 and the following apply. For types of valves, the terms and definitions given in EN 736-1:1995 apply.

EN 488:2011 (E)

3.1 nominal pressure (PN) class
alphanumeric designation used for reference purposes related to a combination of mechanical and dimensional characteristics of a component of a pipe work system

NOTE 1 It comprises the letters PN followed by a dimensionless number.

NOTE 2 The number following the letters PN does not represent a measurable value and should not be used for calculation purposes except where specified in the relevant standard.

NOTE 3 The designation PN is not meaningful unless it is related to the relevant component standard number.

NOTE 4 The allowable pressure of a pipe work component depends on the PN number, the material and design of the component, its allowable temperature, etc., and is given in tables of pressure/temperature ratings specified in the appropriate standards.

NOTE 5 Definition is according to EN 1333.

3.2 maximum operation pressure
maximum internal pressure acting against the pipe wall at any point or in any section of the pipeline at a given operating temperature


NOTE Definition is according to EN 13941:2009+A1:2010.

3.3 nominal size (DN)
numerical metric designation of size is common to components in piping systems of any one size

NOTE Definition is according to EN ISO 6708.

3.4 valve assembly
assembly of valve, valve extension pipe, PE-casing and PUR-foam

NOTE Figure 1 gives an example a valve assembly and its components.

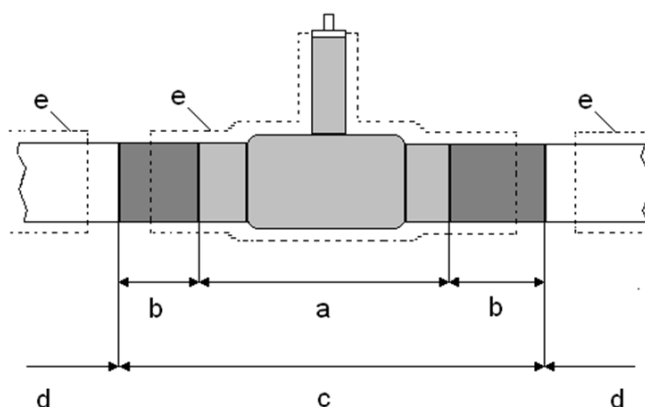

Key
a valve
b valve extension pipe
c valve assembly
d service pipe
e insulation

Figure 1 — Example valve assembly components

3.5

valve

part of the valve assembly supplied by the valve manufacturer (with or without valve extension pipe)

3.6

valve extension pipe

pipe part of the valve assembly welded to the valve

NOTE The valve extension may be required before the insulation process. This can be done by the valve manufacturer or the insulation manufacturer. The valve can be extended with valve extension pipes before insulation or delivered by the valve manufacturer with extensions.

3.7

welding end on valve

welding end of the valve

3.8

steel service pipe

service pipe according to EN 253

4 Requirements

4.1 Pressure ratings for valves

4.1.1 General

The valves shall be designed for use in pipe systems with a maximum operating pressure of 16 bar or 25 bar.

The valves shall be able to withstand a strength test pressure of the district heating system of 1,5 times the maximum operating pressure at ambient temperature in open and closed position.

4.1.2 Valves without indicated flow direction

Valves without an indicated flow direction shall support the pressure load in both directions.

4.2 Service temperatures for valves

The valves shall be able to withstand continuous operation with hot water at various temperatures in accordance with EN 253:2009, Clause 1 and at a minimum water temperature of 4 °C.

4.3 Steel parts

4.3.1 General

The material in the pressurized parts of the valve shall be certified, with a 3.1 certificate, in accordance with EN 10204. If traceability on materials is required by the end user it shall be specified at the time of ordering. Corresponding material certificates shall be delivered to the end user if specified at the time of ordering.

All components shall be designed in accordance with EN 13941:2009+A1:2010, for the actions and stresses that normally occur during a system's entire service life

EN 488:2011 (E)**4.3.2 Valve**

The valve shall be fully welded. Detachable joints, such as flanged or screwed connections, except sealing system at the stem, shall not be used in the pressurized area.

4.3.3 Valve extension pipe

The quality of the valve body shall match with the quality of the valve extension pipe.

4.3.4 Welding ends

The welding ends of the valve assembly shall match with the service pipe in accordance with EN 253:2009, 4.2.2.

Pipe ends shall be prepared in accordance with EN 448:2009, 4.1.9.3.

4.3.5 Welding of steel parts

Fusion welding between valves and valve extension pipe, respectively between valve steel pipe and steel service pipes shall be carried out in accordance with EN 448:2009, 4.1.9.

The quality of the steel at the weld ends of the valve or valve assembly shall match with steel of the service pipes.

Welding of pressurized parts of the valve shall comply with EN 448:2009, 4.1.9.2 and 4.1.9.5.

4.4 Casing**4.4.1 General**

The casing shall be in accordance with EN 448 and EN 253. <https://standards.iteh.ai/catalog/standards/sist/0dad307d-ed00-4e53-8e78-000000000000/sist-en-488-2011>

4.4.2 Requirements for polyethylene welding

The general requirements for polyethylene welding shall be in accordance with EN 448:2009, 4.4.3.

4.4.3 Diameter and wall thickness of the casing

The outside diameter and the minimum wall thickness of the PE casing shall be in accordance with EN 448:2009, 4.4.5.

4.5 Polyurethane rigid foam insulation (PUR)**4.5.1 General**

The requirements for PUR shall be the same as in EN 448:2009, 4.3 when tested in accordance with 5.5 of this standard.

4.5.2 Minimum insulation thickness

The minimum insulation thickness shall be in accordance with EN 448:2009, 4.4.6.