



SLOVENSKI STANDARD
DSIST ETS 300 175-9:1998
01-1 b]11998

8][]HJbY]nVc`ýUbYVfYnj fj] bYHfY_ca i b]_UMY'fB 97 HL!'G_i db]j a Ygb]_f7 4!' - " XY.'DfcZ`Uj bY[UXcglcdUfD5 DŁ


Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 9: Public Access Profile (PAP)

Ta slovenski standard je istoveten z: ETS 300 175-9 E2.% - *!\$-

ICS:

33.070.30 Öã äæ) ^/á à[|zæ) ^ Digital Enhanced Cordless
à!^: ç!çã} ^/á ^\ [{ ~ } ä æã Telecommunications (DECT)
CÖÓVD

DSIST ETS 300 175-9:1998 en

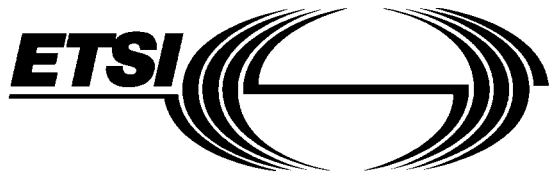

EUROPEAN
TELECOMMUNICATION
STANDARD

ETS 300 175-9

September 1996

Second Edition

Source: ETSI TC-RES

Reference: RE/RES-03027-9

ICS: 33.060, 33.060.50

Key words: DECT, PAP, radio

**Radio Equipment and Systems (RES);
Digital Enhanced Cordless Telecommunications (DECT);
Common Interface (CI);
Part 9 : Public Access Profile (PAP)**

ETSI

European Telecommunications Standards Institute

ETSI Secretariat

Postal address: F-06921 Sophia Antipolis CEDEX - FRANCE

Office address: 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

X.400: c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 92 94 42 00 - Fax: +33 93 65 47 16

Copyright Notification: No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1996. All rights reserved.

Contents

| | |
|---|----|
| Foreword | 9 |
| 1 Scope..... | 11 |
| 2 Normative references..... | 11 |
| 3 Definitions and abbreviations | 12 |
| 3.1 Definitions..... | 12 |
| 3.2 Abbreviations | 14 |
| 4 Features for the public access service..... | 15 |
| 4.1 Description of the features | 15 |
| 4.1.1 Speech | 15 |
| 4.1.2 Bell on | 15 |
| 4.1.3 Bell off | 15 |
| 4.1.4 Off-hook | 15 |
| 4.1.5 On-hook (full release) | 15 |
| 4.1.6 Partial release..... | 15 |
| 4.1.7 Dialed digits (basic)..... | 15 |
| 4.1.8 Dialed digits (additional) | 16 |
| 4.1.9 Dialling delimiter | 16 |
| 4.1.10 Dialling delimiter request | 16 |
| 4.1.11 Register recall..... | 16 |
| 4.1.12 Go to DTMF..... | 16 |
| 4.1.13 Go to pulse | 16 |
| 4.1.14 Pause (interdigit pause) | 16 |
| 4.1.15 Specific trunk carrier selection | 16 |
| 4.1.16 Incoming call | 16 |
| 4.1.17 Hold call..... | 16 |
| 4.1.18 Re-connection of a held call..... | 16 |
| 4.1.19 Forced re-connection | 16 |
| 4.1.20 Authentication of PP..... | 17 |
| 4.1.21 Authentication of user..... | 17 |
| 4.1.22 Authentication of FP..... | 17 |
| 4.1.23 Silent polling | 17 |
| 4.1.24 Class of service field indication | 17 |
| 4.1.25 Inter-operator roaming registration..... | 17 |
| 4.1.26 Control of supervisory tones | 17 |
| 4.1.27 Regular security handshake..... | 18 |
| 4.1.28 Signalling of display characters..... | 18 |
| 4.1.29 Display control characters | 18 |
| 4.1.30 ZAP suspend..... | 18 |
| 4.1.31 ZAP terminate | 18 |
| 4.1.32 Alphanumeric text messaging and radiopaging service | 18 |
| 4.1.33 Voice and user data traffic encryption activation/deactivation | 18 |
| 4.1.34 Signalling traffic encryption activation/deactivation | 18 |
| 4.1.35 Debit public access service | 18 |
| 4.1.36 Credit public access service | 18 |
| 4.1.37 Credit agency public access service..... | 19 |
| 4.1.38 On-demand (hot-bill) public access service | 19 |
| 4.1.39 Advice of tariff request..... | 19 |
| 4.1.40 Advice of charge request..... | 19 |
| 4.1.41 Location registration for incoming calls, paging or messages..... | 19 |
| 4.1.42 Location de-registration for incoming calls, paging or messages..... | 19 |

| | | |
|--------|---|----|
| 4.1.43 | Queue management..... | 19 |
| 4.1.44 | Queue entry request | 19 |
| 4.1.45 | Queue exit request..... | 19 |
| 4.1.46 | "Portable part inaccessible" indication..... | 19 |
| 4.1.47 | "In-range" indication | 19 |
| 4.1.48 | Emergency service access request | 20 |
| 4.1.49 | Indication of teleservices available request..... | 20 |
| 4.1.50 | Indication of teleservices available..... | 20 |
| 4.1.51 | Selection of service provider/network operator..... | 20 |
| 4.1.52 | Selection of required teleservice | 20 |
| 4.1.53 | Selection of bearer service | 20 |
| 4.1.54 | Validation of PP user..... | 20 |
| 4.1.55 | Validation of PP..... | 20 |
| 4.1.56 | Validation of identity module | 20 |
| 4.1.57 | User Personal Identification (UPI)..... | 20 |
| 4.1.58 | Group address | 20 |
| 4.1.59 | Selection of additional character sets | 21 |
| 4.1.60 | Data capability..... | 21 |
| 4.1.61 | Keypad protocol for supplementary services..... | 21 |
| 4.1.62 | Feature key management protocol for supplementary services..... | 21 |
| 4.1.63 | Functional protocol for supplementary services | 21 |
| 4.1.64 | Dial tone detection indication..... | 21 |
| 4.1.65 | Request for indication of (temporary) subscriber number | 21 |
| 4.1.66 | PP capability/FP capability data exchange | 21 |
| 4.1.67 | Subscription registration user procedure (on-air) | 21 |
| 4.1.68 | Subscription registration user procedure (keypad)..... | 21 |
| 4.1.69 | Subscription registration user procedure (DECT authentication module) | 21 |
| 4.1.70 | Subscription data exchange (on-air) | 21 |
| 4.1.71 | Multicell FP coverage..... | 22 |
| 4.1.72 | Handover | 22 |
| 4.1.73 | Multiple subscription registration | 22 |
| 4.1.74 | All-physical-channel capability | 22 |
| 4.2 | Summary of DECT public access service facilities..... | 23 |
| 5 | Effect of the services on the DECT layers..... | 25 |
| 5.1 | Overview of the affected DECT layers | 25 |
| 5.2 | Mapping of the features | 27 |
| 5.2.1 | Speech | 27 |
| 5.2.2 | Bell on | 27 |
| 5.2.3 | Bell off | 27 |
| 5.2.4 | Off-hook | 28 |
| 5.2.5 | On-hook (full release)..... | 28 |
| 5.2.6 | Partial release | 28 |
| 5.2.7 | Dialled digits (basic)..... | 28 |
| 5.2.8 | Dialled digits (additional)..... | 28 |
| 5.2.9 | Dialling delimiter..... | 28 |
| 5.2.10 | Dialling delimiter request..... | 28 |
| 5.2.11 | Register recall | 28 |
| 5.2.12 | Go to DTMF..... | 28 |
| 5.2.13 | Go to pulse | 29 |
| 5.2.14 | Pause (interdigit pause)..... | 29 |
| 5.2.15 | Specific trunk carrier selection | 29 |
| 5.2.16 | Incoming call | 29 |
| 5.2.17 | Hold call..... | 29 |
| 5.2.18 | Re-connection of a held call..... | 29 |
| 5.2.19 | Forced re-connection | 29 |
| 5.2.20 | Authentication of PP..... | 29 |
| 5.2.21 | Authentication of user..... | 29 |
| 5.2.22 | Authentication of FP..... | 29 |
| 5.2.23 | Silent polling | 30 |

| | | |
|--------|---|----|
| 5.2.24 | Class of service field indication | 30 |
| 5.2.25 | Inter-operator roaming registration..... | 30 |
| 5.2.26 | Control of supervisory tones | 30 |
| 5.2.27 | Regular security handshake..... | 30 |
| 5.2.28 | Signalling of display characters..... | 30 |
| 5.2.29 | Display control characters | 30 |
| 5.2.30 | ZAP suspend..... | 30 |
| 5.2.31 | ZAP terminate | 30 |
| 5.2.32 | Alphanumeric text messaging and radiopaging service..... | 31 |
| 5.2.33 | Voice and user data traffic encryption activation/deactivation | 31 |
| 5.2.34 | Signalling traffic encryption activation/deactivation | 31 |
| 5.2.35 | Debit public access service | 31 |
| 5.2.36 | Credit public access service | 32 |
| 5.2.37 | Credit agency public access service..... | 32 |
| 5.2.38 | On-demand (hot-bill) public access service | 32 |
| 5.2.39 | Advice of tariff request..... | 32 |
| 5.2.40 | Advice of charge request..... | 32 |
| 5.2.41 | Location registration for incoming calls, paging or messages..... | 32 |
| 5.2.42 | Location de-registration for incoming calls, paging or messages..... | 32 |
| 5.2.43 | Queue management..... | 32 |
| 5.2.44 | Queue entry request | 33 |
| 5.2.45 | Queue exit request | 33 |
| 5.2.46 | PP inaccessible indication..... | 33 |
| 5.2.47 | In-range indication | 33 |
| 5.2.48 | Emergency service access request..... | 33 |
| 5.2.49 | Indication of teleservices available request | 33 |
| 5.2.50 | Indication of teleservices available | 33 |
| 5.2.51 | Selection of service provider/network operator..... | 33 |
| 5.2.52 | Selection of required teleservice | 33 |
| 5.2.53 | Selection of bearer service | 33 |
| 5.2.54 | Validation of PP user | 34 |
| 5.2.55 | Validation of PP..... | 34 |
| 5.2.56 | Validation of identity module | 34 |
| 5.2.57 | User identification | 34 |
| 5.2.58 | Group address | 34 |
| 5.2.59 | Selection of additional character sets | 34 |
| 5.2.60 | Data capability | 34 |
| 5.2.61 | Keypad protocol for supplementary services..... | 34 |
| 5.2.62 | Feature key management protocol for supplementary services..... | 34 |
| 5.2.63 | Functional protocol for supplementary services | 34 |
| 5.2.64 | Dial tone detection indication | 35 |
| 5.2.65 | Request for indication of (temporary) subscriber number | 35 |
| 5.2.66 | Portable part capability/FP capability data exchange..... | 35 |
| 5.2.67 | Subscription registration user procedure (on-air) | 35 |
| 5.2.68 | Subscription registration user procedure (keypad)..... | 35 |
| 5.2.69 | Subscription registration user procedure (DECT authentication module) | 35 |
| 5.2.70 | Subscription data exchange (on-air) | 35 |
| 5.2.71 | Multicell FP coverage..... | 35 |
| 5.2.72 | Handover | 35 |
| 5.2.73 | Multiple subscription registration | 36 |
| 5.2.74 | All-physical-channel capability..... | 36 |
| 6 | Requirements regarding the NWK layer..... | 36 |
| 6.1 | Required procedures | 36 |
| 6.1.1 | CC procedures..... | 36 |
| 6.1.2 | MM procedures | 37 |
| 6.1.3 | COMS procedures..... | 37 |
| 6.1.4 | CLMS procedures | 37 |
| 6.1.5 | LCE procedures | 38 |
| 6.1.6 | Supplementary service procedures | 38 |

| | | |
|-----------|--|----|
| 6.1.7 | Management procedures..... | 38 |
| 6.2 | Required messages in the PT and FT..... | 38 |
| 6.3 | Required mandatory information elements | 42 |
| 6.3.1 | Information elements in CC messages..... | 43 |
| 6.3.2 | Information elements in CISS messages..... | 47 |
| 6.3.3 | Information elements in MM messages..... | 48 |
| 6.4 | Coding of information elements in CC messages..... | 51 |
| 6.4.1 | Coding of mandatory information elements in CC messages..... | 51 |
| 6.4.2 | Coding of optional information elements in CC messages..... | 52 |
| 6.5 | Coding of information elements in MM messages..... | 53 |
| 7 | Requirements regarding the DLC layer..... | 53 |
| 7.1 | Control plane..... | 53 |
| 7.1.1 | Minimum requirements | 53 |
| 7.1.2 | Incoming call (feature 16)..... | 53 |
| 7.1.3 | Alphanumeric text messaging and radiopaging service (feature 32)..... | 54 |
| 7.2 | User plane | 54 |
| 8 | Mandatory requirements regarding the MAC layer..... | 54 |
| 8.1 | MAC layer services..... | 54 |
| 8.1.1 | Connection oriented services | 54 |
| 8.1.2 | Broadcast services | 54 |
| 8.2 | MAC layer procedures..... | 54 |
| 8.2.1 | Connection oriented service procedures | 54 |
| 8.2.1.1 | General..... | 54 |
| 8.2.1.2 | Antenna diversity in connection oriented services | 55 |
| 8.2.1.2.1 | Q1 setting in direction PT to FT | 55 |
| 8.2.1.2.2 | Antenna change due to FT reception of Q1..... | 55 |
| 8.2.1.2.3 | Antenna change due to poor quality on slot received at FT | 55 |
| 8.2.1.3 | Information for handover..... | 55 |
| 8.2.1.3.1 | Q1 and Q2 setting in direction FT to PT..... | 55 |
| 8.2.1.3.2 | PT reception of Q1 and Q2 | 55 |
| 8.2.2 | Broadcast procedures..... | 56 |
| 8.3 | Scrambling..... | 56 |
| 8.4 | Required messages..... | 56 |
| 8.4.1 | Header field..... | 56 |
| 8.4.2 | Messages in the tail field..... | 57 |
| 8.4.2.1 | Identities information (N_T tail)..... | 57 |
| 8.4.2.2 | System information and multiframe marker (Q_T tail)..... | 57 |
| 8.4.2.3 | Paging (P_T tail)..... | 57 |
| 8.4.2.4 | MAC control (M_T tails) | 57 |
| 8.4.3 | Messages in the B-field..... | 57 |
| 8.5 | Monitoring of speech quality | 57 |
| 9 | MAC layer requirements for the optional features..... | 58 |
| 9.1 | Incoming call (feature 16)..... | 58 |
| 9.2 | Alphanumeric text messaging and radiopaging service (feature 32)..... | 58 |
| 9.2.1 | Alphanumeric service via the MAC broadcast service (case A) | 58 |
| 9.2.2 | Alphanumeric service via the MAC C/L downlink service (case B1) | 59 |
| 9.2.3 | Alphanumeric service via the MAC C/L downlink and uplink services (case B2) | 59 |
| 9.3 | Encryption (features 33 and 34)..... | 60 |
| 9.3.1 | Connection oriented service procedures | 60 |
| 9.3.2 | System information and multiframe marker (Q_T tail) | 60 |
| 9.3.3 | MAC control (M_T tails) | 60 |
| 9.4 | Selection of bearer service (feature 53)..... | 60 |
| 9.5 | TARI request..... | 60 |
| 9.5.1 | Non-continuous broadcast procedure..... | 61 |