

INTERNATIONAL STANDARD

**ISO/IEC
9594-9**

Second edition
1998-12-15

Information technology — Open Systems Interconnection — The Directory: Replication

*Technologies de l'information — Interconnexion de systèmes ouverts
(OSI) — L'Annuaire: Duplication*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO/IEC 9594-9:1998](#)

<https://standards.iteh.ai/catalog/standards/sist/bd7617b8-ab80-4d14-ad6f-8b782e3307fe/iso-iec-9594-9-1998>

Reference number
ISO/IEC 9594-9:1998(E)



© ISO/IEC 1998

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO/IEC 9594-9:1998](#)

<https://standards.iteh.ai/catalog/standards/sist/bd7617b8-ab80-4d14-ad6f-8b782e3307fe/iso-iec-9594-9-1998>

© ISO/IEC 1998

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.ch
Web www.iso.ch

Published by ISO in 2000
Printed in Switzerland

Contents

	<i>Page</i>
1 Scope	1
2 Normative references.....	1
2.1 Identical Recommendations International Standards.....	1
2.2 Paired Recommendations International Standards equivalent in technical content.....	2
3 Definitions	2
3.1 Basic directory definitions.....	2
3.2 Directory model definitions.....	2
3.3 Distributed operation definitions.....	2
3.4 Replication definitions	3
4 Abbreviations	4
5 Conventions	4
6 Replication in the Directory.....	4
6.1 Caching.....	4
6.2 Shadowing.....	5
6.3 Shadowing functional model.....	5
6.3.1 Primary shadowing.....	5
6.3.2 Secondary shadowing.....	6
7 Shadowing in the Directory	7
7.1 Shadowing agreement	7
7.2 Shadowed information	7
7.2.1 SDSEs	ISO/IEC 9594-9:1998
7.2.2 Establishment of shadowed information.....	10
7.3 Shadow operations	8b782e3307fe/iso-iec-9594-9-1998
7.4 DSA Shadow Bind and DSA Shadow Unbind.....	11
7.4.1 DSA Shadow Bind	11
7.4.2 DSA Shadow Unbind	12
8 Shadow operational binding	12
8.1 Shadow operational binding type characteristics	12
8.1.1 Symmetry and roles.....	12
8.1.2 Agreement	12
8.1.3 Initiator	12
8.1.4 Establishment parameters.....	12
8.1.5 Type identification	12
8.2 DSA procedures for operational binding management	13
8.2.1 Establishment procedure	13
8.2.2 Modification procedure	13
8.2.3 Termination procedure	14
8.2.4 Operations and procedures	14
8.3 Operational Binding	14
9 Shadowing agreement.....	15
9.1 Shadowing agreement specification	15
9.2 Unit of replication	16
9.2.1 Area specification.....	17
9.2.2 Attribute selection	17
9.2.3 Subordinate knowledge	18
9.2.4 Subentries	18
9.2.5 Principles for the use of SDSE information	19
9.2.6 Overlapping replicated areas	19

9.3	Update mode	20
9.3.1	Supplier update mode	20
9.3.2	Consumer update mode	20
9.3.3	Scheduling parameters	20
10	Directory information shadow service.....	21
10.1	Shadow supplier initiated service.....	21
10.2	Shadow consumer initiated service	22
11	Shadow operations.....	22
11.1	Coordinate Shadow Update operation.....	22
11.1.1	Coordinate Shadow Update parameters	23
11.1.2	Coordinate Shadow Update success.....	23
11.1.3	Coordinate Shadow Update failure	23
11.2	Request Shadow Update operation.....	24
11.2.1	Request Shadow Update parameters	24
11.2.2	Request Shadow Update success.....	25
11.2.3	Request Shadow Update failure	25
11.3	Update Shadow operation	25
11.3.1	Update Shadow parameters	26
11.3.2	Update Shadow success	28
11.3.3	Update Shadow failure	28
12	Shadow error	29
12.1	Shadow error problems	29
12.2	Last update	30
12.3	Update window.....	30
12.4	Common results.....	30
Annex A	– Directory shadow abstract service in ASN.1	31
Annex B	– Amendments and corrigenda	36

<https://standards.iteh.ai/catalog/standards/sist/bd7617b8-ab80-4d14-ad6f-8b782e3307fe/iso-iec-9594-9-1998>

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this part of ISO/IEC 9594 may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

International Standard ISO/IEC 9594-9 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology, Subcommittee SC 6, Telecommunications and information exchange between systems*, in collaboration with ITU-T. The identical text is published as ITU-T Recommendation X.525.

This second edition cancels and replaces the first edition (ISO/IEC 9594-9:1995), of which it constitutes a minor revision.

ISO/IEC 9594 consists of the following parts, under the general title *Information technology — Open Systems Interconnection — The Directory*.
<http://standards.iteh.ai/catalog/standards/sist/bd7617b8-ab80-4d14-ad6f-8b782e3307fe/iso-iec-9594-9-1998>

- *Part 1: Overview of concepts, models and services*
- *Part 2: Models*
- *Part 3: Abstract service definition*
- *Part 4: Procedures for distributed operation*
- *Part 5: Protocol specifications*
- *Part 6: Selected attribute types*
- *Part 7: Selected object classes*
- *Part 8: Authentication framework*
- *Part 9: Replication*
- *Part 10: Use of systems management for administration of the Directory*

Annex A forms a normative part of this part of ISO/IEC 9594. Annex B is for information only.

Introduction

This Recommendation | International Standard, together with other Recommendations | International Standards, has been produced to facilitate the interconnection of information processing systems to provide directory services. A set of such systems, together with the directory information which they hold, can be viewed as an integrated whole, called the *Directory*. The information held by the Directory, collectively known as the Directory Information Base (DIB) is typically used to facilitate communication between, with or about objects such as application-entities, people, terminals and distribution lists.

The Directory plays a significant role in Open Systems Interconnection, whose aim is to allow, with a minimum of technical agreement outside of the interconnection standards themselves, the interconnection of information processing systems:

- from different manufacturers;
- under different managements;
- of different levels of complexity; and
- of different ages.

This Recommendation | International Standard defines the replication capabilities provided by DSAs to improve the level of service to Directory users.

This third edition technically revises and enhances, but does not replace, the second edition of this Recommendation | International Standard. Implementations may still claim conformance to the second edition. However, at some point, the second edition will not be supported (i.e. reported defects will no longer be resolved). It is recommended that implementations conform to this third edition as soon as possible.

This third edition specifies version 1 and version 2 of the Directory protocols.

The first and second editions also specified version 1. Most of the services and protocols specified in this edition are designed to function under version 1. When version 1 has been negotiated, differences between the services and between the protocols defined in the three editions are accommodated using the rules of extensibility defined in the 1997 edition of ITU-T Rec. X.519 | ISO/IEC 9594-5. However some enhanced services and protocols, e.g. signed errors, will not function unless all Directory entities involved in the operation have negotiated version 2.

Implementors should note that a defect resolution process exists and that corrections may be applied to this Recommendation | International Standard in the form of technical corrigenda. The identical corrections will be applied to this Recommendation | International Standard in the form of an Implementor's Guide. A list of approved technical corrigenda for this Recommendation | International Standard can be obtained from the Subcommittee secretariat. Published technical corrigenda are available from your national standards organization. The Implementor's Guide may be obtained from the ITU Web site.

Annex A, which is an integral part of this Recommendation | International Standard, provides the ASN.1 module for the directory shadow abstract service.

Annex B, which is not an integral part of this Recommendation | International Standard, lists the amendments and defect reports that have been incorporated to form this edition of this Recommendation | International Standard.

INTERNATIONAL STANDARD**ITU-T RECOMMENDATION****INFORMATION TECHNOLOGY – OPEN SYSTEMS INTERCONNECTION –
THE DIRECTORY: REPLICATION****1 Scope**

This Recommendation | International Standard specifies a shadow service which DSAs may use to replicate Directory information. The service allows Directory information to be replicated among DSAs to improve service to Directory users. The shadowed information is updated, using the defined protocol, thereby improving the service provided to users of the Directory.

2 Normative references

The following Recommendations and International Standards contain provisions which, through reference in this text, constitute provisions of this Recommendation | International Standard. At the time of publication, the editions indicated were valid. All Recommendations and Standards are subject to revision, and parties to agreements based on this Recommendation | International Standard are encouraged to investigate the possibility of applying the most recent edition of the Recommendations and Standards listed below. Members of IEC and ISO maintain registers of currently valid International Standards. The Telecommunication Standardization Bureau of the ITU maintains a list of currently valid ITU-T Recommendations.

[ISO/IEC 9594-9:1998](#)**2.1 Identical Recommendations|International Standards**[8b782e3307fe/iso-iec-9594-9-1998](#)

- ITU-T Recommendation X.200 (1994) | ISO/IEC 7498-1:1994, *Information technology – Open Systems Interconnection – Basic Reference Model: The Basic Model*.
- ITU-T Recommendation X.500 (1997) | ISO/IEC 9594-1:1997, *Information technology – Open Systems Interconnection – The Directory: Overview of concepts, models and services*.
- ITU-T Recommendation X.501 (1997) | ISO/IEC 9594-2:1997, *Information technology – Open Systems Interconnection – The Directory: Models*.
- ITU-T Recommendation X.509 (1997) | ISO/IEC 9594-8:1997, *Information technology – Open Systems Interconnection – The Directory: Authentication framework*.
- ITU-T Recommendation X.511 (1997) | ISO/IEC 9594-3:1997, *Information technology – Open Systems Interconnection – The Directory: Abstract service definition*.
- ITU-T Recommendation X.518 (1997) | ISO/IEC 9594-4:1997, *Information technology – Open Systems Interconnection – The Directory: Procedures for distributed operation*.
- ITU-T Recommendation X.519 (1997) | ISO/IEC 9594-5:1997, *Information technology – Open Systems Interconnection – The Directory: Protocol specifications*.
- ITU-T Recommendation X.520 (1997) | ISO/IEC 9594-6:1997, *Information technology – Open Systems Interconnection – The Directory: Selected attribute types*.
- ITU-T Recommendation X.521 (1997) | ISO/IEC 9594-7:1997, *Information technology – Open Systems Interconnection – The Directory: Selected object classes*.
- ITU-T Recommendation X.530 (1997) | ISO/IEC 9594-10:1997, *Information technology – Open Systems Interconnection – The Directory: Use of systems management for administration of the Directory*.
- ITU-T Recommendation X.680 (1994) | ISO/IEC 8824-1:1995, *Information technology – Abstract Syntax Notation One (ASN.1): Specification of basic notation*.

- ITU-T Recommendation X.681 (1994) | ISO/IEC 8824-2:1995, *Information technology – Abstract Syntax Notation One (ASN.1): Information object specification*.
- ITU-T Recommendation X.682 (1994) | ISO/IEC 8824-3:1995, *Information technology – Abstract Syntax Notation One (ASN.1): Constraint specification*.
- ITU-T Recommendation X.683 (1994) | ISO/IEC 8824-4:1995, *Information technology – Abstract Syntax Notation One (ASN.1): Parametrization of ASN.1 specifications*.
- ITU Recommendation X.830 (1995) | ISO/IEC 11586-1:1995, *Information technology Open Systems Interconnection – Generic upper layers security: Overview, models and notation*.
- ITU Recommendation X.833 (1995) | ISO/IEC 11586-4:1995, *Information technology – Open Systems Interconnection – Generic upper layers security: Protecting transfer syntax specification*
- ITU-T Recommendation X.880 (1994) | ISO/IEC 13712-1:1995, *Information technology – Remote operations: Concepts, model and notation*.
- ITU-T Recommendation X.881 (1994) | ISO/IEC 13712-2:1995, *Information technology – Remote operations: OSI realizations – Remote Operations Service Element (ROSE) service definition*.

2.2 Paired Recommendations | International Standards equivalent in technical content

- CCITT Recommendation X.208 (1998), *Specification of Abstract Syntax Notation One (ASN.1)*.
- ISO/IEC 8824:1990, *Information technology – Open Systems Interconnection – Specification of Abstract Syntax Notation 1 (ASN.1)*.

3 Definitions

iTeh STANDARD PREVIEW (standards.iteh.ai)

3.1 Basic directory definitions

[ISO/IEC 9594-9:1998](#)

The following terms are defined in ITU-T Rec. X.500 | ISO/IEC 9594-1:17b8-ab80-4d14-ad6f-8b782e3307fe/iso-iec-9594-9-1998

- (the) Directory.

3.2 Directory model definitions

The following terms are defined in ITU-T Rec. X.501 | ISO/IEC 9594-2:

- a) distinguished name;
- b) Directory Information Tree;
- c) DSA Specific Entry;
- d) DSA Information Model;
- e) DSA Information Tree;
- f) Directory System Agent.

3.3 Distributed operation definitions

The following terms are defined in ITU-T Rec. X.518 | ISO/IEC 9594-4:

- a) access point;
- b) knowledge information;
- c) name resolution;
- d) naming context;
- e) non-specific subordinate reference;
- f) subordinate reference.

3.4 Replication definitions

The following terms are defined in this Recommendation | International Standard:

3.4.1 area prefix: The sequence of RDNs and associated administrative information common to all entries within a replicated area.

3.4.2 attribute completeness: Indicates whether or not all user attributes are included in an entry-copy.

3.4.3 cache-copy: A copy of an entry (or part of an entry) whose consistency with its corresponding entry is maintained by means outside the scope of this Directory Specification.

3.4.4 caching: The process of creating cache copies. This process is outside the scope of this Directory Specification.

3.4.5 consumer reference: The access point of the shadow consumer.

3.4.6 entry-copy: Shadowed information from an entry.

3.4.7 extended knowledge: Those subordinate and non-specific subordinate references that would be included as subordinate knowledge if the replicated area were extended to the lower boundary of the naming context.

3.4.8 master DSA: The DSA which has administrative authority for a naming context. All adds, deletes and modifications to entries in this naming context are done by the master DSA. The master DSA may enter into shadowing agreements with other DSAs to provide copies of a subset of a naming context (see unit of replication).

3.4.9 primary shadowing: Shadowing where the shadow supplier is the master DSA.

3.4.10 replicated area: A subtree of the DIT for purposes of shadowing.

3.4.11 replication: The process by which copies of entry and operational information are held by DSAs other than the master DSA.

3.4.12 replication base entry: The distinguished name of the root vertex of a replicated area.

3.4.13 secondary shadowing: Shadowing where the shadow supplier is not the master DSA.

3.4.14 shadow consumer: A DSA that receives shadowed information.

3.4.15 shadow operational binding: The relationship between two DSAs, one acting as a supplier of replicated information and the other as its consumer.

3.4.16 shadow service: The service provided to perform shadowing between two DSAs that have entered into one or more shadowing agreements.

3.4.17 shadow supplier: A DSA that provides shadowed information. This DSA may or may not be the master DSA.

3.4.18 shadowed DSA specific entry (SDSE): A unit of shadowed information which is associated with a specific name; it represents the information taken from a DSE which is shadowed.

3.4.19 shadowed information: The complete set of information associated with a unit of replication. Shadowed information is conceptually held both by the shadow supplier and the shadow consumer for the purposes of the shadow protocol and comprises a tree shaped structure of shadowed DSEs.

3.4.20 shadowing: Replication between two DSAs whereby shadowed information is copied and maintained using the Directory Information Shadowing Protocol.

3.4.21 shadowing agreement: The terms specific to a particular agreement required for shadowing to occur between a pair of DSAs.

3.4.22 subordinate completeness: Indicates whether or not subordinate knowledge is complete for an entry-copy.

3.4.23 supplier reference: The access point of the shadow supplier.

3.4.24 unit of replication: A specification of the information to be shadowed, including (optionally) subordinate knowledge information.

4 Abbreviations

For the purposes of this Recommendation | International Standard, the following abbreviations apply:

ACI	Access Control Information
DIB	Directory Information Base
DISP	Directory Information Shadowing Protocol
DIT	Directory Information Tree
DSA	Directory System Agent
DSE	DSA Specific Entry
DUA	Directory User Agent
RDN	Relative Distinguished Name
SDSE	Shadowed DSA Specific Entry

5 Conventions

With minor exceptions this Directory Specification has been prepared according to the "Presentation of ITU-T | ISO/IEC common text" guidelines in the Guide for ITU-T and ISO/IEC JTC 1 Cooperation, March 1993.

The term "Directory Specification" (as in "this Directory Specification") shall be taken to mean this Recommendation | International Standard. The term "Directory Specifications" shall be taken to mean all of the X.500-Series Recommendations ISO/IEC 9594.

iTeh STANDARD PREVIEW

This Directory Specification uses the term "1988 edition systems" to refer to systems conforming to the first (1988) edition of the Directory Specifications, i.e. the 1988 edition of the series of CCITT X.500 Recommendations and the ISO/IEC 9594:1990 edition. This Directory Specification uses the term "1993 edition systems" to refer to systems conforming to the second (1993) edition of the Directory Specifications, i.e. the 1993 edition of the series of ITU-T X.500 Recommendations and the ISO/IEC 9594:1993 edition. Systems conforming to this third edition of the Directory Specifications are referred to as "1997 edition systems".

This Directory Specification presents ASN.1 notation in the bold Times Roman, 9 point typeface. When ASN.1 types and values are referenced in normal text, they are differentiated from normal text by presenting them in the bold Times Roman, 9 typeface.

If the items in a list are numbered (as opposed to using "–" or letters), then the items shall be considered steps in a procedure.

This Directory Specification defines directory operations using the Remote Operation notation defined in ITU-T Rec. X.880 | ISO/IEC 13712-1.

6 Replication in the Directory

Replicated (copied) information can exist in the Directory. Shadowing is the mechanism for replication defined in this Directory Specification. Directory information can also be replicated by means outside this Directory Specification, such as caching. Any such alternative means of replication will need to ensure that exactly one instance of each replicated entry is identified as the master copy if the Directory and DSA Abstract Services are to be used.

Service controls provide the ability to control whether replicated information may be used in support of directory operations, regardless of the replication mechanism used to acquire the copy. DISP is protected by the underlying protocol as defined in ITU-T Rec. X.518 | ISO/IEC 9594-5.

6.1 Caching

One method of replicating directory information is caching. Caching procedures are considered to be almost entirely governed by local policies, and therefore outside the scope of this Directory Specification.

6.2 Shadowing

Another method of replicating directory information is shadowing. An overview of the Directory information shadow service is found in clause 7. Before shadowing can occur, an agreement, covering the conditions under which shadowing may occur is required. Although such agreements may be established in a variety of ways, such as policy statements covering all DSAs within a given DMD, the shadowing is always between a pair of DSA. The technical parameters for the subsequent shadowing are specified as part of the resulting shadowing agreement. Components of the shadowing agreement are defined in clause 9.

Once the terms of the agreement have been established, the DSAs may initiate, modify and subsequently terminate the shadowing agreement. This may be done through a shadow operational binding as defined in clause 8.

This shadowing service for the Directory is based on the models established in ITU-T Rec. X.501 | ISO/IEC 9594-2, to satisfy the requirements outlined in ITU-T Rec. X.500 | ISO/IEC 9594-1. The protocol specification for shadowing and conformance requirements are provided in ITU-T Rec. X.519 | ISO/IEC 9594-5. In addition, this Directory Specification provides the definition of an operational binding for the purpose of initiating, modifying, and terminating shadowing agreements between DSAs. This operational binding type is defined using the tools specified in ITU-T Rec. X.501 | ISO/IEC 9594-2.

The directory information shadow service is defined in clause 10. The actual shadowing occurs through the set of operations defined in clause 11. These operations accommodate the transfer of Directory information and updates to the shadowed information.

The use of shadowed information by a DSA to satisfy a Directory request is described in ITU-T Rec. X.518 | ISO/IEC 9594-4.

6.3 Shadowing functional model

iTeh STANDARD PREVIEW

In the standardized form of Directory replication, termed *shadowing*, a DSA may assume the role of *shadow supplier*, the source of shadowed information, or *shadow consumer*, the recipient of shadowed information. The role played by a DSA when engaging in standardized replication activities (shadow supplier or shadow consumer) is always with respect to another DSA which plays the reciprocal role (shadow consumer or shadow supplier).

A given DSA may assume both roles, either:

<https://standards.itech.ai/catalog/standards/sist/bd7617b8-ab80-4d14-ad6f-8b782e3307fe/iso-iec-9594-9-1998>

- with respect to different DSAs for the same or different units of replication; or
- with respect to a single DSA (which plays the reciprocal role) for different units of replication.

The Shadowing functional model addresses two approaches to shadowing Directory information:

- a *primary shadowing* policy requires that each shadow consumer receives its updates directly from the master DSA for the unit of replication;
- a *secondary shadowing* policy permits a shadow consumer to assume the shadow supplier role with respect to shadow consumers not having a shadowing agreement directly with the master DSA.

The characteristics of these two policies and their approach to addressing performance, availability, reliability and recovery are described below.

6.3.1 Primary shadowing

Figure 1 depicts primary shadowing. In this case the shadowing policy in effect has the following characteristics:

- a) the master DSA is the only shadow supplier for a replicated area;
- b) each shadow consumer has a direct shadowing agreement with the master DSA;
- c) only read, compare, search, and list operations may be performed at a shadow consumer holding shadowed information. All modification operations are directed to the master DSA.

Because it allows for the placement of copies of often requested information, or knowledge of it, closer to the requester, this approach may be used to satisfy the performance requirement. Also, because this approach provides for the redundancy of individual entry or knowledge information, it is possible, in a primitive sense, to provide for availability, reliability, and recovery.

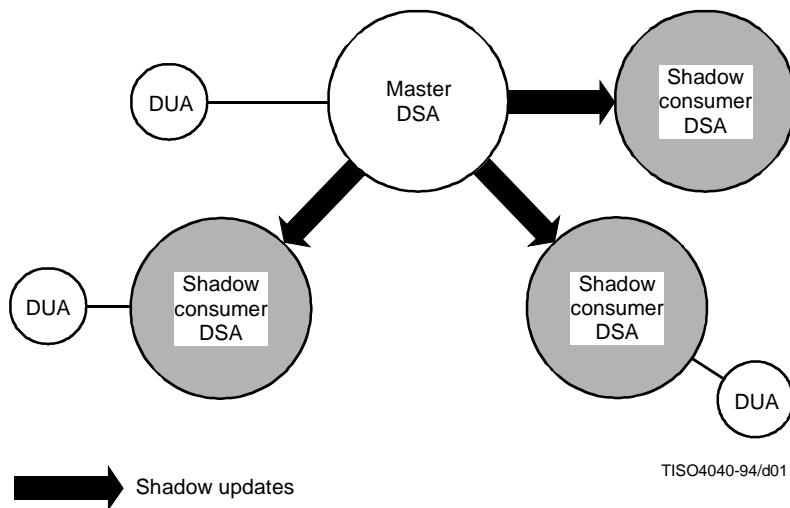


Figure 1 – Primary shadowing

6.3.2 Secondary shadowing

Figure 2 depicts secondary shadowing. In this case the shadowing policy in effect has the following characteristics:

- a) The master DSA is not the only shadow supplier for a replicated area. Only some shadow consumers have a direct shadowing agreement with the master DSA as their shadow supplier.
- b) Other shadow consumers may have a shadowing agreement with a shadow supplier that is not the master for the unit of replication. The shadowing agreements between the master DSA and its direct shadow consumers may, however, have an impact on secondary shadowing agreements.
- c) Only read, compare, search, and list operations may be performed at a shadow consumer holding shadowed information. All modification operations are directed to the master DSA, either directly (if a secondary shadow consumer DSA has knowledge of the master DSA) or indirectly via the shadow supplier DSA(s).

Secondary shadowing is very similar to primary shadowing in the way that it provides for performance, availability, reliability and recovery. It differs in that it relieves the single master DSA of the burden of directly supplying all shadow consumers with the shadowed information. This is a desirable combination in environments where a large number of shadow consumers are holding the same shadowed information.

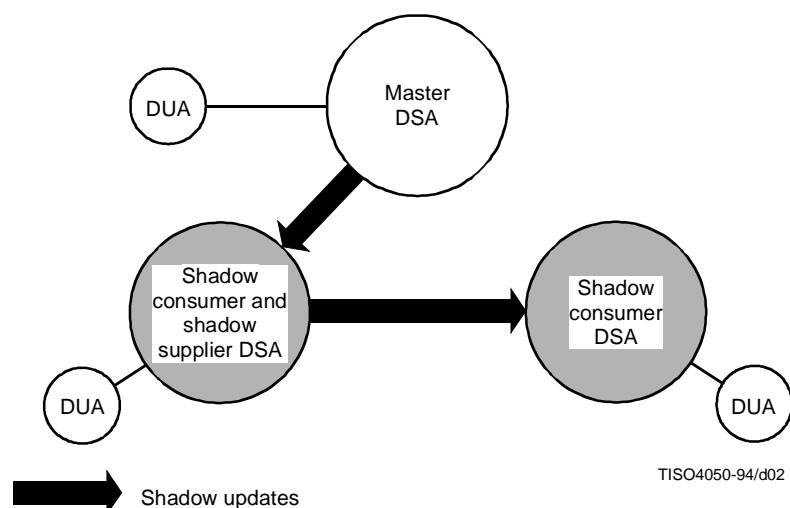


Figure 2 – Secondary shadowing

7 Shadowing in the Directory

The directory information shadow service defined here, provides the Directory with a standardized mechanism to provide and support shadowed information. In outline, the shadow supplier maintains, for each shadowing agreement, information which is to be shadowed (the shadowed information). This information is replicated by protocol exchange between the shadow supplier and the shadow consumer. The information to be shadowed is all or a subset of the information held by the shadow supplier's DSA Information Tree. The shadow consumer's shadowed information becomes part of its DSA Information Tree.

To use the directory information shadow service, the Administrative Authorities of two DSAs must first reach an agreement on the terms under which shadowing will take place. This agreement, and the technical specification related to this agreement (the shadowing agreement), is discussed in 7.1. A description of the manner in which shadowed information is represented for the purposes of shadowing is provided in 7.2. The actual transfer of this shadowed information from the shadow supplier to the shadow consumer is accomplished by means of a set of shadow operations, which are introduced in 7.3.

The use of shadowed information to satisfy Directory requests is described in ITU-T Rec. X.518 | ISO/IEC 9594-4.

7.1 Shadowing agreement

Before shadowing can occur, an agreement for shadowing is established between the Administrative Authorities of the Directory Management Domains involved in the shadowing. This agreement for shadowing may be multilateral with respect to DSAs, in that it may cover all shadowing permitted among the set of DSAs concerned. The agreement may include any set of terms acceptable to the Administrative Authorities. For example, the agreement may specify policy information related to security, charging, or other special conditions.

A shadowing agreement is the specific agreement for a particular instance of shadowing between a pair of DSAs (the shadow consumer DSA and the shadow supplier DSA). This agreement may be explicit (e.g. contractual) or implicit (e.g. covered by the general terms of an agreement for shadowing as defined above). Each shadowing agreement has a unique identifier used in all protocol exchanges associated with the agreement. Other parameters of a shadowing agreement include a specification of the unit of replication, the update mode and possibly the access point of the master DSA for the shadowed information. Access control information is always included in shadowed information and therefore need not be explicitly specified. iteh.ai/catalog/standards/sist/bd7617b8-ab80-4d14-ad6f-8b782e3307fe/iso-iec-9594-9-1998

Initially the representation of the shadowing agreement within a DSA (shadow supplier or shadow consumer) is created by an off-line administrative process. It represents essentially a template whose technical parameter values are subsequently validated during the initiating phase of the agreement and possibly modified during modification operations on the agreement. The method of storing this agreement is beyond the scope of this Directory Specification. Some technical aspects of the shadowing agreement may be exchanged via protocol and are discussed in detail in clause 9.

It must be noted that although the shadowing agreement will normally provide a true representation of the technical parameters related to the directory information shadow service, there may be exceptional cases in which policy overrides the technical specification resulting in a service inconsistency. For example, there may be certain attributes or attribute values that must be withheld for security reasons. It may be the case that security policy prevents disclosing the mere existence of these attributes, in which case it would be a violation to represent in the shadowing agreement the fact that they are being withheld. In this type of situation, the behaviour of the shadow supplier DSA will be as if the technical specification were a true representation. Thus, users with access to the sensitive data will receive different views of the affected entries, depending on whether they access the master or a shadow consumer.

7.2 Shadowed information

Shadowed information is the logical set of information which is replicated by the shadow consumer. A replicated area is a subtree of the DIT defined for purposes of shadowing. The three components of shadowed information are:

- a) *Prefix information*: Information relevant to entries within the replicated area which, with respect to the DSA information model, is positioned between the area prefix and the root DSE. This may contain administrative entry and subentry information.
- b) *Area information*: Information about DSEs whose names fall within the replicated area.
- c) *Subordinate information*: Information about knowledge references subordinate to the replicated area.