

SLOVENSKI STANDARD SIST EN 692:2006+A1:2009

01-maj-2009

Obdelovalni stroji - Mehanske stiskalnice - Varnost

Machine tools - Mechanical presses - Safety

Werkzeugmaschinen - Mechanische Pressen - Sicherheit

Machines-outils - Presses mécaniques - Sécurité PREVIEW

Ta slovenski standard je istoveten z: EN 692:2005+A1:2009

SIST EN 692:2006+A1:2009

https://standards.iteh.ai/catalog/standards/sist/e356bc7f-9bf5-432f-ac6e-ae787bccf86c/sist-en-692-2006a1-2009

ICS:

25.120.10 Kovaški stroji. Stiskalnice. Forging equipment. Presses.

Škarje Shears

SIST EN 692:2006+A1:2009 en,fr

SIST EN 692:2006+A1:2009

iTeh STANDARD PREVIEW (standards.iteh.ai)

<u>SIST EN 692:2006+A1:2009</u> https://standards.iteh.ai/catalog/standards/sist/e356bc7f-9bf5-432f-ac6e-ae787bccf86c/sist-en-692-2006a1-2009 EUROPEAN STANDARD NORME EUROPÉENNE

EUROPÄISCHE NORM

EN 692:2005+A1

February 2009

ICS 25.120.10

Supersedes EN 692:2005

English Version

Machine tools - Mechanical presses - Safety

Machines-outils - Presses mécaniques - Sécurité

Werkzeugmaschinen - Mechanische Pressen - Sicherheit

This European Standard was approved by CEN on 22 July 2004 and includes Amendment 1 approved by CEN on 29 December 2008.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

(standards.iteh.ai)

<u>SIST EN 692:2006+A1:2009</u> https://standards.iteh.ai/catalog/standards/sist/e356bc7f-9bf5-432f-ac6e-ae787bccf86c/sist-en-692-2006a1-2009



EUROPEAN COMMITTEE FOR STANDARDIZATION COMITÉ EUROPÉEN DE NORMALISATION EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

Contents

		page
1	Scope	
2	Normative references	6
3	Terms, definitions and abbreviations	7
3.1	Terms and definitions	
3.2	Abbreviations	10
4	List of significant hazards	11
5 5.1	Safety requirements and/or measures	
5.1 5.2	Basic design considerations	
5.2.1	Brakes and clutches	
5.2.2	Presses with part revolution clutches (friction clutches)	
5.2.3	Hydraulic and pneumatic systems - Common features	
5.2.4	Pneumatic systems	
5.2.5	Hvdraulic systems	16
5.2.6	Slide adjustment and stroke adjustment	16
5.3	Mechanical hazards in the tools area	17
5.4	The control and monitoring system and ards.itch.ai Control and monitoring functions	21
5.4.1	Control and monitoring functions	21
5.4.2	Part revolution clutch presses: redundancy and monitoring of clutch/brake control systems,	
5 4 0	and overrun monitoring for single cycle use 692:2006+A1:2009 Muting https://standards.iteh.ai/catalog/standards/sist/e356bc7f-9bf5-432f-ac6e-	22
5.4.3 5.4.4	Programmable electronic systems (PES), programmable pneumatic systems (PPS) and safety	24
5.4.4	related functions	
5.4.5	Selector switches	
5.4.6	Isolation switch	
5.4.7	Position switches	
5.4.8	Control devices	
5.4.9	Valves	25
5.5	Tool-setting, trial strokes, maintenance and lubrication	
5.6	Mechanical hazards - other	
5.7	Slips, trips and falls	
5.8	Protection against other hazards	
5.8.1	Electrical hazards	
5.8.2	Thermal hazards	
5.8.3 5.8.4	High pressure fluid ejection hazards Hazards generated by noise	
5.8.5	Hazards generated by vibration	
5.8.6	Hazards generated by materials and substances	
5.8.7	Hazards generated by neglecting ergonomic principles	
6	Verification of the safety requirements and/or measures	
7	Information for use	
7.1	Marking	
7.2	Instruction handbook	48
Annex	A (normative) Interlocking guards	50
A .1	Presses with part revolution clutches	50
Annex	B (normative) Calculation of minimum safety distances	53
Annex	C (informative) Electro-sensitive protective equipment (ESPE) using active opto-electronic	
,ox	protective devices (AOPDs)	55

Annex D (informative) Closed tools	56
Annex E (informative) The setting of the rotary cam arrangemen E.1 Basic features of the eccentric adjustment and rotary can	
E.2 Determination of the position where muting begins	63
Annex F (informative) Determination of the overall response tim	e <i>T</i> 66
Annex G (normative) Conditions for noise measurement of med	hanical presses70
Annex ZA (informative) Relationship between this European Sta Requirements of EU Directive 98/37/EC, amended by Dir	
Annex ZB (informative) A Relationship between this European S Requirements of EU Directive 2006/42/EC (A)	

iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST EN 692:2006+A1:2009 https://standards.iteh.ai/catalog/standards/sist/e356bc7f-9bf5-432f-ac6e-ae787bccf86c/sist-en-692-2006a1-2009

Foreword

This document (EN 692:2005+A1:2009) has been prepared by Technical Committee CEN/TC 143 "Machine tools - Safety", the secretariat of which is held by SNV.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by August 2009, and conflicting national standards shall be withdrawn at the latest by December 2009.

This document includes Amendment 1, approved by CEN on 2008-12-29.

This document supersedes A 692:2005 A.

The start and finish of text introduced or altered by amendment is indicated in the text by tags [A].

This document has been prepared under a mandate given to CEN by the European Commission and the European Free Trade Association, and supports essential requirements of EU Directive(s).

For relationship with EU Directive(s), see informative Annexes ZA and ZB, which are integral parts of this document. (A)

Annexes A, B and G to this standard are normative, whereas Annexes C, D, E, F, ZA and ZB are informative.

(standards.iteh.ai)

Organisation contributing to the preparation of this European Standard include the European Manufacturer Association CECIMO.

https://standards.iteh.ai/catalog/standards/sist/e356bc7f-9bf5-432f-ac6e-

NOTE The safety requirements related to the use of PES or PPS will be dealt with at its next revision.

The European Standards produced by CEN/TC 143 are particular to machine-tools and complement the relevant A and B standards on the subject of general safety (see introduction of EN 292-1:1991 for a description of A, B and C standards).

A1) deleted text (A1)

♠ EN 692:2005 ♠ constitutes a revision of EN 692:1996 for which it has been technically revised : the main modifications are listed below :

- Withdrawal of mechanical presses with full revolution clutches.
- Tacking into account of some additive requirements about the use of closed tools and fixed' enclosing guard(s) as protective devices (sub clauses 5.3.4, 5.3.9, 5.3.10 and 5.4.5.3),
- Addition of requirements on the implementation of protective devices for powering on the machine,
- Redrafting in order to ensure the coherence with the requirements of EN 693.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

Introduction

This standard has been prepared to be a harmonised standard to provide one means of conforming with the essential safety requirements of the Machinery Directive and associated EFTA Regulations.

This document is a C-type standard as stated in EN ISO 12100-1.

The machinery concerned and the extent to which hazards, hazardous situations and events are covered are indicated in the scope of this standard.

When provisions of this C type standard are different from those which are stated in A or B standards, the provision of this C type standard take precedence over the provisions of the other standards for machines that have been designed and built according to the provisions of this C type standard.

Complementary guidance is given in the A and B standards to which reference is made in the text (see clause 2). The figures are intended to be examples only and not to give the only interpretation of the text.

The requirements of this European Standard concern designers, manufacturers, suppliers and importers of machines described in the scope.

This standard also includes information to be provided by the manufacturer to the user.

(standards.iteh.ai)

1 Scope

SIST EN 692:2006+A1:2009

- 1.1 This European Standard specifies technical safety requirements and measures to be adopted by persons undertaking the design, manufacture and supply of mechanical presses with part revolution clutch hereinafter called presses which are intended to work cold metal or material partly of cold metal.
- NOTE The design of a machine includes the study of the machine itself, taking into account all phases of its "life", i.e. construction, transport and commission (including assembly, installation and adjustment), use (including setting, teaching/programming or process changeover, operation, cleaning, fault finding and maintenance) and decommissioning, dismantling and, as far as safety is concerned, disposal, and the drafting of the instructions related to all above-mentioned phases of the "life" of the machine (except construction), dealt with it in 6.5 of EN ISO 12100-2:2003.
- **1.2** This European Standard also covers presses, whose primary intended use is to work cold metal, which are to be used in the same way to work other sheet materials (such as cardboard, plastic, rubber or leather), and metal powder.
- **1.3** The requirements in this standard take account of intended use, as defined in 3.22 of EN ISO 12100-1:2003. This standard presumes access to the press from all directions, deals with the hazards during the various phases of the life of the machine described in clause 4, and specifies the safety measures for both the operator and other exposed persons.
- **1.4** This European Standard also applies to ancillary devices which are an integral part of the press. This standard also applies to machines which are integrated into an automatic production line where the hazards and risk arising are comparable to those of machines working separately.
- **1.5** This European Standard does not cover mechanical presses with full revolution clutch.
- **1.6** This European Standard does not cover machines whose principal designed purpose is:
- a) sheet metal cutting by guillotine;

- b) attaching a fastener, e.g. riveting, stapling or stitching;
- c) bending or folding;
- d) straightening;
- e) turret punch pressing;
- f) extruding;
- g) drop forging or drop stamping;
- h) compaction of metal powder;
- i) single purpose punching machines designed exclusively for profiles, e.g. for the construction industry.
- **1.7** This European Standard is not applicable to machines which are manufactured before the date of publication of this document by CEN.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

iTeh STANDARD PREVIEW

EN 294:1992, Safety of machinery - Safety distances to prevent danger zones being reached by the upper limbs.

EN 349:1993, Safety of machinery - Minimum gaps to avoid crushing of parts of the human body.

EN 418:1992, Safety of machinery Emergency stop equipment functional aspects a Principles for design. ae787bccf86c/sist-en-692-2006a1-2009

EN 563:1994, Safety of machinery - Temperatures of touchable surfaces - Ergonomics data to establish temperature limit values for hot surfaces.

EN 574:1996, Safety of machinery - Two-hand control devices - Functional aspects - Principles for design.

EN 626-1:1994, Safety of machinery - Reduction of risks to health from hazardous substances emitted by machinery - Part 1: Principles and specifications for machinery manufacturers.

EN 842:1996, Safety of machinery - Visual danger signals - General requirements, design and testing.

EN 953:1997, Safety of machinery - Guards - General requirements for the design and construction of fixed and movable guards.

EN 954-1:1996, Safety of machinery - Safety related parts of control systems - Part 1: General principles for design.

EN 982:1996, Safety of machinery - Safety requirements for fluid power systems and their components - Hydraulics.

EN 983:1996, Safety of machinery - Safety requirements for fluid power systems and their components - Pneumatics.

EN 999:1998, Safety of machinery - The positioning of protective equipment in respect of approach speeds of parts of the human body.

EN 1005-2:2003, Safety of machinery - Human physical performance - Part 2: Manual handling of machinery and component parts of machinery.

EN 1037:1995, Safety of machinery - Prevention of unexpected start-up.

EN 1050:1996, Safety of machinery - Principles for risk assessment.

EN 1088:1995, Safety of machinery - Interlocking devices associated with guards -Principles for design and selection.

EN 1127-1:1997, Explosive atmospheres - Explosion prevention and protection - Part 1: Basic concepts and methodology.

EN 1299:1997, Mechanical vibration and shock - Vibration isolation of machines - Information for the application or source isolation.

EN 60204-1:1997, Safety of machinery - Electrical equipment of machines - Part 1: General requirements (IEC 60204-1:1997).

EN 61310-2:1995, Safety of machinery - Indication, marking and actuation - Part 2: Requirements for marking (IEC 1310-2:1995).

EN 61496-1:2004, Safety of machinery - Electro-sensitive protective equipment - Part 1: General requirements and tests (IEC 61496-1:2004, modified).

CLC/TS 61496-2:2003, Safety of machinery - Electrosensitive protective equipment - Part 2: Particular requirements for equipment using active opto-electronic protective devices (AOPDs) (IEC 61496-2:1997).

EN ISO 3746:1995, Acoustics - Determination of sound power levels of noise sources using sound pressure - Survey method using an enveloping measurement surface over a reflecting plane (ISO 3746:1995).

EN ISO 4871:1996, Acoustics - Declaration and verification of noise emission values of machinery and equipment (ISO 4871:1996) (A) SIST EN 692:2006+A1:2009

https://standards.iteh.ai/catalog/standards/sist/e356bc7f-9bf5-432f-ac6e-EN ISO 11202:1995, Acoustics - Noise emitted by machinery and equipment - Measurement of emission sound pressure levels at work station and at other specified positions - Survey method in situ (ISO 11202:1995).

EN ISO 12100-1:2003, Safety of machinery - Basic concepts, general principles for design - Part 1: Basic terminology, methodology (ISO 12100-1:2003)

EN ISO 12100-2:2003, Safety of machinery - Basic concepts, general principles for design - Part 2: Technical principles (ISO 12100-2:2003)

ISO 8540:1993, Open front mechanical power presses - Vocabulary.

3 Terms, definitions and abbreviations

For the purposes of this European Standard, the terms and definitions given in EN ISO 12100-1:2003 and EN ISO 12100-2:2003 and in relevant type A and type B standards, and the following apply.

3.1 Terms and definitions

3.1.1

hand brake

brake (see 3.1.2) where a flexible band lined with friction material is arranged around the circumference of a drum

3.1.2

brake

mechanism (usually friction) intended to stop and hold the slide when the clutch, if provided, is disengaged

3.1.3

clutch

mechanism used to impart the movement of the flywheel to the slide

3.1.4

clutch - full revolution

type of clutch that, when tripped or actuated, cannot be disengaged until the slide has completed a complete stroke, e.g. most positive key clutches. It also includes clutches which can only be disengaged at certain positions in the operating cycle

3.1.5

clutch - part revolution

type of clutch that can be engaged or disengaged at any point in the stroke of the slide, e.g. most friction clutches

3.1.6

cycle - automatic

operating mode where the slide repeats continuously or intermittently, all functions achieved without manual intervention into the danger zone after initiation

3.1.7

cycle - operating

movement of the slide from the cycle start position (normally the top dead centre) to the bottom dead centre and back to the cycle stop position (normally the top dead centre). The operating cycle includes all operations carried out during this movement

3.1.8 cycle - single

iTeh STANDARD PREVIEW

operating mode where each operating cycle of the slide has to be positively actuated by the operator

3.1.9

SIST EN 692:2006+A1:2009

points at which the tool, during its travel, is 7071 modern and sixty and si

- either nearest/closest to the die (generally it corresponds to the end of the closing stroke), known as the bottom dead centre (BDC),
- or furthest from the die (generally it corresponds to the end of the opening stroke), known as the top dead centre (TDC)

3.1.10

fixed part of the tools used in a press

3.1.11

die cushion

accessory for a die which accumulates and releases, or absorbs, force as required in some press operations

3.1.12

direct drive

type of driving arrangement wherein no clutch is used: movement of the slide is accomplished by energising and de-energising the motor, possibly in conjunction with a brake

3.1.13

early opening interlocking guard

guard associated with an interlocking device which, if opened when any dangerous movement in the tools area has ceased, does not interrupt the operating cycle

3.1.14

guard locking device

mechanical device to maintain an interlocking guard gate in the closed and locked position until the risk of injury from the hazardous machine functions has passed

3.1.15

limited movement control device; inching device

control device, a single actuation of which, together with the control system of the machine, permits only a limited amount of travel of a machine element

[3.26.9 of EN ISO 12100-1:2003]

3.1.16

mechanical press

machine designed or intended to transmit energy from a prime mover to a tool by mechanical means for the purpose of the working (e.g. forming or shaping) of cold metal or material partly of cold metal between the tools. Such energy is transmitted by a flywheel and part revolution clutch or by means of a direct drive mechanism (see Figure 1)

3.1.17

monitoring (M)

safety function which ensures that a safety measure is initiated if the ability of a component or an element to perform its function is diminished, or if the process conditions are changed in such a way that hazards are generated

3.1.18

muting

temporary automatic suspension of a safety function(s) by safety related parts of the control system during otherwise safe conditions in the operation of a machine

[3.7 of EN 954-1:1996]

iTeh STANDARD PREVIEW

(standards.iteh.ai) 3.1.19

overall system stopping performance; overall response time

time occurring from actuating the protective device to the cessation of hazardous motion, or to the machine assuming a safe condition https://standards.iteh.ai/catalog/standards/sist/e356bc7f-9bf5-432f-ac6e-

ae787bccf86c/sist-en-692-2006a1-2009

3.1.20

overrun

movement of the crankshaft past a defined stopping point, e.g. TDC

overrun monitoring device

device which provides a signal to inhibit further machine initiation when the overrun exceeds the pre-set limit(s)

3.1.22

position switch

switch which is operated by a moving part of the machine when this part reaches or leaves a predetermined position

3.1.23

redundancy (R)

application of more than one device or system, or part of a device or a system, with the objective of ensuring that, in the event of one failing to perform its function, another is available to perform that function

[3.47 of EN 60204-1:1997]

3.1.24

shut height

distance from the bed-plate surface to the slide surface measured with the maximum variable stroke, stroke down and slide adjustment up

[3.12 of ISO 8540:1993]

3.1.25

single stroke function

feature used to limit the motion of the tool to one operating cycle at each engagement of the clutch even if the stroke initiating means (e.g. a pedal) is held in the operating position

3.1.26

slide

main reciprocating press member which holds the tool

3.1.27

tool

moving part of the tools

3.1.28

tools

term for the combination of tool and die


3.1.29

tools - closed

tools designed and constructed to be inherently safe (see Figure D.1)

3.2 Abbreviations

M	Monitoring (see 3.1.17)		
R	Redundancy (see 3.1.23) eh STANDARD PREVIEW		
S	Single channel (standards.iteh.ai)		
BDC	Bottom dead centre (see 3.1.9) SIST EN 692:2006+A1:2009 https://standards.iteh.ai/catalog/standards/sist/e356bc7f-9bf5-432f-ac6e-		
TDC	Top dead centre (see 3.1.9) ac787bccf86c/sist-en-692-2006a1-2009		
PES	Programmable electronic system PPS Programmable pneumatic system		
AOPD	Active opto-electronic protective device		
ESPE	Electro-sensitive protective equipment		

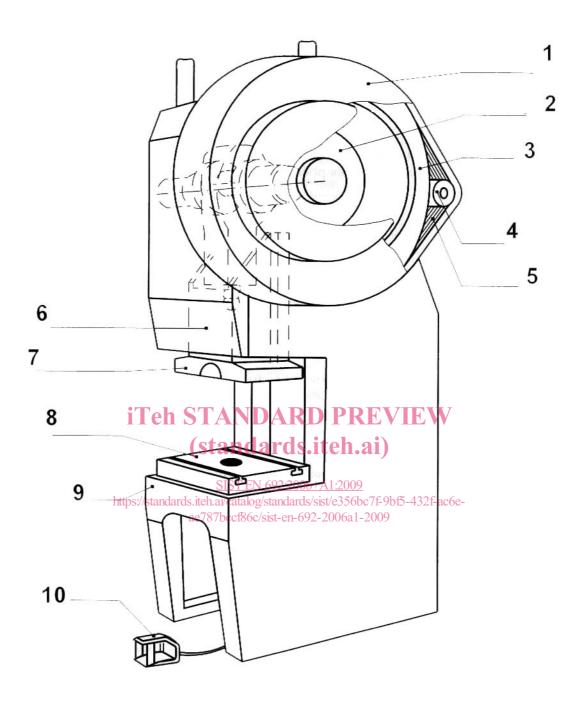

Key

- 1 Flywheel guard
- 2 Clutch/brake
- 3 Flywheel
- 4 Motor pulley
- 5 Belt

- 6 Slide
- 7 Slide flange, tool holder
- 8 Bed-plate/bolster
- 9 Bed
- 10 Pedal

Figure 1 — Example of mechanical power press (tools area safeguards not shown)

4 List of significant hazards

4.1 The list of hazards contained in Table 1 is the result of a risk assessment, carried out as required by EN 1050, for all mechanical presses covered by the scope of this standard. The technical measures and information for use contained in Clauses 5 and 7 and Annexes A, B, C, E and F are based on the risk assessment, and deal with the identified hazards by either eliminating them or reducing the effects of the risks they generate.

- **4.2** Risk assessment assumes foreseeable access from all directions, as well as overruns, unexpected and unintended strokes or gravity falls. Risks to both the operators and other persons who can have access to the danger zones are identified, taking into account all hazards which can occur during the life of the press. The assessment includes an analysis of the effect of failure in the control system.
- **4.3** In addition, the user of this standard, i.e. the designer, manufacturer or supplier, shall conduct a risk assessment in accordance with EN 1050 with particular attention to:
- the intended use of the press including maintenance, tool-setting and cleaning, and its reasonably foreseeable misuse;
- the identification of the significant hazards associated with the press (see 4.4).
- **4.4** Table 1 of this standard is a list of significant hazards and their related danger zones normally associated with a mechanical power press. As part of the risk assessment, the designer shall verify whether the list of hazards in Table 1 is exhaustive and applicable to the press under consideration.

iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST EN 692:2006+A1:2009 https://standards.iteh.ai/catalog/standards/sist/e356bc7f-9bf5-432f-ac6e-ae787bccf86c/sist-en-692-2006a1-2009

Table 1 — Significant hazards, danger zones, preventive measures

Mechanical hazardsTools area:Crushing hazard- between moving toolsCutting or severing hazard- moving slideEntanglement hazard- moving die cushionsDrawing-in or trapping hazard- work-piece ejectorsImpact hazardMoving parts of electrical, hydraulic and pneumatic equipmentMotor and drive machineryMechanical handling deviceDuring installation, setting operation, maintenance.Ejection hazardMachine components Work-pieces and toolsHigh pressure fluid ejectionHydraulic systems	Preventive measures: relevant clauses of this standard 5.3 to 5.5 Annexes A, B, C, D and E 5.6.1 to 5.6.3 5.6.1 to 5.6.4	Relevant clauses of EN ISO 12100- 1:2003 4.2.1
Crushing hazard Shearing hazard Cutting or severing hazard Entanglement hazard Drawing-in or trapping hazard Impact hazard Impact hazard Entanglement hazard Impact haza	5.3 to 5.5 Annexes A, B, C, D and E 5.6.1 to 5.6.3 5.6.1 to 5.6.4	1:2003 4.2.1
Crushing hazard Shearing hazard Cutting or severing hazard Entanglement hazard Drawing-in or trapping hazard Impact hazard Impact hazard Entanglement hazard Impact haza	5.3 to 5.5 Annexes A, B, C, D and E 5.6.1 to 5.6.3 5.6.1 to 5.6.4	4.2.1
Crushing hazard Shearing hazard Cutting or severing hazard Entanglement hazard Drawing-in or trapping hazard Impact hazard Impact hazard Imp	Annexes A, B, C, D and E 5.6.1 to 5.6.3 5.6.1 to 5.6.4	
Shearing hazard Cutting or severing hazard Entanglement hazard Drawing-in or trapping hazard Impact hazard Imp	Annexes A, B, C, D and E 5.6.1 to 5.6.3 5.6.1 to 5.6.4	
Cutting or severing hazard Entanglement hazard Drawing-in or trapping hazard Impact hazard Impa	and E 5.6.1 to 5.6.3 5.6.1 to 5.6.4	4.2.1
Entanglement hazard Drawing-in or trapping hazard Impact hazard	5.6.1 to 5.6.3 5.6.1 to 5.6.4	4.2.1
Drawing-in or trapping hazard - work-piece ejectors - guards Moving parts of electrical, hydraulic and pneumatic equipment Motor and drive machinery Mechanical handling device During installation, setting operation, maintenance. Ejection hazard - work-piece ejectors - guards Moving parts of electrical, hydraulic and pneumatic equipment Motor and drive machinery Mechanical handling device During installation, setting operation maintenance.	5.6.1 to 5.6.4	4.2.1
Impact hazard - guards Moving parts of electrical, hydraulic and pneumatic equipment Motor and drive machinery Mechanical handling device During installation, setting operation, maintenance. Ejection hazard Machine components Work-pieces and tools	5.6.1 to 5.6.4	4.2.1
Impact hazard Moving parts of electrical, hydraulic and pneumatic equipment Motor and drive machinery Mechanical handling device During installation, setting operation, maintenance. Ejection hazard Machine components Work-pieces and tools	5.6.1 to 5.6.4	4.2.1
hydraulic and pneumatic equipment Motor and drive machinery Mechanical handling device During installation, setting operation, maintenance. Ejection hazard Machine components Work-pieces and tools	5.6.1 to 5.6.4	4.2.1
equipment Motor and drive machinery Mechanical handling device During installation, setting operation, maintenance. Ejection hazard Machine components Work-pieces and tools	5.6.1 to 5.6.4	
Motor and drive machinery Mechanical handling device During installation, setting operation, maintenance. Ejection hazard Machine components Work-pieces and tools	5.6.1 to 5.6.4	
Mechanical handling device During installation, setting operation, maintenance. Ejection hazard Machine components Work-pieces and tools	5.6.1 to 5.6.4	
During installation, setting operation, maintenance. Ejection hazard Machine components Work-pieces and tools		1
operation , maintenance. Ejection hazard Machine components Work-pieces and tools	F 6 F	(
Ejection hazard Machine components Work-pieces and tools	EGE	
Work-pieces and tools		
	7.2.2 i)	
	5.8.3	4.2.1
hazard	5.6.5	4.2.1
Slip, trip and fall hazards Toh All work at heights PD PRI	7 V F V5.7	4.10
Floor area around the press		
Electrical hazards (standards.iteh.a)	1)	
Direct contact hazard Electrical equipment	5.8.1	4.3
Indirect contact hazard Electrical equipment 6+A1:2009	5.8.1	4.3
https://standar.Rarts.aimadeg/slivearbysiselectrica	F-9bf5-432f-ac6e-	
equipment under fault conditions	009	
Thermal radiation hazard (burns)		
Thermal hazards resulting in Brakes, clutches, parts of the	5.8.2	4.4
burns and scalds, by a possible hydraulic system	0.0.2	
contact of persons		
Hazards generated by noise Any area at the press where	5.8.4	4.5
resulting in hearing losses (deaf- there is a risk to hearing		
ness)		
Hazards generated by vibra- Parts of the press where the risk	5.8.5	4.6
tion occurs, e.g. the workstation(s)		
Hazards generated by mate-		
rials and substances proces-		
sed, used or exhausted by		
machinery, for example:		
Hazards resulting from contact Hydraulic systems; pneumatic	5.8.6.1 to 5.8.6.4	4.8
with or inhalation of harmful systems and their controls; toxic		
fluids, gases, mists, fumes and work materials		
dusts		
Fire or explosion hazards Exhaust ventilation and dust collection equipment	5.8.6.5	4.8
	5.8.7	4.9
ing ergonomic principles in controls for operators and		
machine design (mismatch of maintenance staff handling tools		
machinery with human characte-		
ristics and abilities) caused, for		
example, by unhealthy postures	1	
or excessive efforts		1
machine design (mismatch of maintenance staff handling tools machinery with human characteristics and abilities) caused, for example, by unhealthy postures		4.9