



**SLOVENSKI STANDARD**  
**SIST ISO 281:2001/AMD2:2001**  
**01-julij-2001**

---

Rolling bearings — Dynamic load ratings and rating life AMENDMENT 2: Life modification factor aXYZ

Rolling bearings — Dynamic load ratings and rating life AMENDMENT 2: Life modification factor aXYZ

**iTeh STANDARD PREVIEW**

Facteur aXYZ de modification de la durée  
(standards.iteh.ai)

Ta slovenski standard je istoveten z: **ISO 281:1990/Amd 2:2000**  
SIST ISO 281:2001/AMD2:2001  
<https://standards.iteh.ai/catalog/standards/sist/de1c165e-57dc-4905-8639-e3c1fe3d4233/sist-iso-281-2001-amd2-2001>

---

**ICS:**

21.100.20      Kotalni ležaji      Rolling bearings

**SIST ISO 281:2001/AMD2:2001**      en

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST ISO 281:2001/AMD2:2001

<https://standards.iteh.ai/catalog/standards/sist/de1c163e-57dc-4903-8839-e3c1fe3d4233/sist-iso-281-2001-amd2-2001>

# INTERNATIONAL STANDARD

# ISO 281

First edition  
1990-12-01

**AMENDMENT 2**  
2000-02-15

---

---

## Rolling bearings — Dynamic load ratings and rating life

### AMENDMENT 2: Life modification factor $a_{XYZ}$

*Roulements — Charges dynamiques de base et durée nominale*

*AMENDEMENT 2: Facteur  $a_{XYZ}$  de modification de la durée*

iTeh STANDARD PREVIEW  
(standards.iteh.ai)

[SIST ISO 281:2001/AMD2:2001](https://standards.iteh.ai/catalog/standards/sist/de1c163e-57dc-4903-8839-e3c1fe3d4233/sist-iso-281-2001-amd2-2001)

[https://standards.iteh.ai/catalog/standards/sist/de1c163e-57dc-4903-8839-  
e3c1fe3d4233/sist-iso-281-2001-amd2-2001](https://standards.iteh.ai/catalog/standards/sist/de1c163e-57dc-4903-8839-e3c1fe3d4233/sist-iso-281-2001-amd2-2001)



Reference number  
ISO 281:1990/Amd.2:2000(E)

© ISO 2000

**ISO 281:1990/Amd.2:2000(E)****PDF disclaimer**

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ISO 281:2001/AMD2:2001](https://standards.iteh.ai/catalog/standards/sist/de1c163e-57dc-4903-8839-e3c1fe3d4233/sist-iso-281-2001-amd2-2001)

<https://standards.iteh.ai/catalog/standards/sist/de1c163e-57dc-4903-8839-e3c1fe3d4233/sist-iso-281-2001-amd2-2001>

© ISO 2000

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 734 10 79  
E-mail [copyright@iso.ch](mailto:copyright@iso.ch)  
Web [www.iso.ch](http://www.iso.ch)

Printed in Switzerland

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this Amendment may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

Amendment 2 to International Standard ISO 281:1990 was prepared by Technical Committee ISO/TC 4, *Rolling bearings*, Subcommittee SC 8, *Load ratings and life* and constitutes a replacement of clause 9 **Adjusted rating life**.

Annex A of this Amendment is for information only.

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[SIST ISO 281:2001/AMD2:2001](https://standards.iteh.ai/catalog/standards/sist/de1c163e-57dc-4903-8839-e3c1fe3d4233/sist-iso-281-2001-amd2-2001)

<https://standards.iteh.ai/catalog/standards/sist/de1c163e-57dc-4903-8839-e3c1fe3d4233/sist-iso-281-2001-amd2-2001>

## ISO 281:1990/Amd.2:2000(E)

## Introduction

Since International Standard ISO 281 was published in 1990 more knowledge has been gained regarding the influence on bearing life of contamination, lubrication, internal stresses from mounting, stresses from heat treatment, fatigue load limit of the material etc. It is therefore now possible to take into consideration factors influencing the life calculations in a more complete way. In this amendment is specified how new, additional knowledge can be put into practice in a consistent way in the life formula. The life calculated with this extended life formula is called modified rating life and replaces the adjusted rating life,  $L_{na}$ , in ISO 281:1990. The modified rating life has received a new designation,  $L_{nm}$ , to avoid confusion with  $L_{na}$ .

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ISO 281:2001/AMD2:2001](https://standards.iteh.ai/catalog/standards/sist/de1c163e-57dc-4903-8839-e3c1fe3d4233/sist-iso-281-2001-amd2-2001)

<https://standards.iteh.ai/catalog/standards/sist/de1c163e-57dc-4903-8839-e3c1fe3d4233/sist-iso-281-2001-amd2-2001>

# Rolling bearings — Dynamic load ratings and rating life

## AMENDMENT 2: Life modification factor $a_{XYZ}$

### 1 Symbols

$a_{XYZ}$  is the life modification factor, based on a systems approach in accordance with 2.4;

$a_1$  is the life adjustment factor for reliability;

$a_2, a_3, a_4, a_5, a_m$  are the interdependent life adjustment factors for various influences in accordance with 2.3 and 2.4.2;

$e$  is the Weibull exponent;

$L_{na}$  is the adjusted rating life, in millions of revolutions;

$L_{nm}$  is the modified rating life, in millions of revolutions;

$L_{10}$  is the basic rating life, in millions of revolutions;

$n$  is the probability of failure, in %;

$S$  is the reliability (probability of survival) in %, within the range 100 to 0;

$\kappa$  is the ratio of viscosity =  $\nu/\nu_1$ ;

$\Delta$  is the film parameter, ratio of film thickness to composite surface roughness;

$\nu$  is the actual lubricant viscosity at the operating temperature, in square millimetres per second;

$\nu_1$  is the required viscosity at the operating temperature to obtain adequate lubrication, in square millimetres per second;

$\sigma$  is the real stress used in fatigue criterion, in megapascals;

$\sigma_u$  is the endurance stress limit used in fatigue criterion, in megapascals.

### 2 Modified rating life

#### 2.1 General

It is often sufficient to use the basic rating life,  $L_{10}$ , as a criterion of bearing performance. This life is associated with 90 % reliability.

However, for some applications it may be of interest to calculate the life for a higher reliability, and for many applications it is desirable to take into account the influence of the bearing quality and operating conditions in a more accurate and complete way. The modified rating life,  $L_{nm}$ , meets this demand. [The index  $n$  represents probability of failure in % and  $(100 - n)$  the probability of survival (also expressed as the reliability).]

## ISO 281:1990/Amd.2:2000(E)

The life  $L_{nm}$ , i.e. the basic rating life modified for a reliability of  $(100 - n) \%$ , for special bearing properties and for specific operating conditions, can be calculated with the formula

$$L_{nm} = a_1 a_{XYZ} L_{10} \quad (1)$$

Values of the life adjustment factor  $a_1$  are given in Table 1.

### 2.2 Life adjustment factor for reliability, $a_1$

**Table 1 — Life adjustment factor for reliability,  $a_1$**

Reliability $S$	$L_{nm}$	$a_1$
90	$L_{10m}$	1
95	$L_{5m}$	0,62
96	$L_{4m}$	0,53
97	$L_{3m}$	0,44
98	$L_{2m}$	0,33
99	$L_{1m}$	0,21

**iTeh STANDARD PREVIEW**  
(standards.iteh.ai)

Table 1 is based on a Weibull exponent of  $e = 1,5$ . It is possible to calculate  $a_1$  for other exponent values (see annex A).

### 2.3 Life modification factor, $a_{XYZ}$

SIST ISO 281:2001/AMD2:2001

[https://standards.iteh.ai/catalog/standards/sist/de1c163e-57dc-4903-8839-](https://standards.iteh.ai/catalog/standards/sist/de1c163e-57dc-4903-8839-e3c1e3d4233/sist-iso-281-2001-amd2-2001)

In ISO 281-1:1977 the factors  $a_2$  and  $a_3$  were introduced to consider the influence of material and lubrication conditions on bearing life. However, it has been recognised that  $a_2$  and  $a_3$  are interdependent, and this has led many bearing manufacturers to use a combined  $a_{23}$  factor. The scope of this combined factor  $a_{23}$  has been extended with the introduction of the  $a_{XYZ}$  factor to cover additional interdependent influences.

These interdependencies imply that

$$a_{XYZ} = f(a_2, a_3, a_m) \quad (2)$$

Modern technology makes it possible to determine  $a_{XYZ}$  by combining computer supported theory with empirical tests and practical experience. Besides bearing type, the factor  $a_{XYZ}$  can include the influence of:

- material (e.g. cleanliness, hardness, surface structure, fatigue limit, response to temperature);
- lubrication (e.g. viscosity, bearing speed, bearing size, type of lubricant, additives);
- environment (e.g. contamination level, humidity);
- contaminant particles (e.g. hardness, size, form, material);
- internal stresses in the rings (e.g. from the manufacturing process, from inner ring interference after mounting);
- mounting (e.g. handling damages, misalignment);
- bearing load.



## 2.4 Systems approach to life calculations

### 2.4.1 Modified life calculation by means of systems approach

Below a certain load a modern high quality bearing can attain an infinite life if the lubrication conditions, the cleanliness and other operating conditions are favourable. The real contact stress when the fatigue load limit is reached is of the order of 1 500 MPa for normal bearing steels.

In many applications however, contact stresses are larger than this value and, in addition, the operating conditions can further reduce the bearing life.

It is possible to relate all influences to the applied stresses and to the strength of the material, e.g.:

- indentations give rise to edge stresses;
- a thin oil film increases the shear stresses in the contact region between raceway and rolling element;
- an increased temperature reduces the fatigue limit of the material, i.e. its strength;
- a tight inner ring fit gives rise to hoop stresses.

The different influences on bearing life are dependent on each other. A systems approach to the fatigue life calculation is therefore appropriate in which the influence on the life of the system due to variation and interaction of interdependent factors will be considered.

Diagrams or equations can be made up expressing  $a_{XYZ}$  as a function of  $\sigma_u/\sigma$ , the endurance stress limit divided by the real stress, with as many influencing factors as possible considered (see Figure 1).

In Figure 1, the diagram for a given lubrication condition also illustrates how  $a_{XYZ}$  asymptotically approaches infinity, if the real stress,  $\sigma$  is decreased down to the endurance stress limit,  $\sigma_u$ , when a fatigue criterion applies. Traditionally, the orthogonal shear stress has been used as a fatigue criterion in bearing life calculations (see reference [1] in the Bibliography). The diagram in Figure 1 can therefore also be based on endurance strength in shear.

Manufacturers are expected to be responsible for the advice given about the calculation of  $a_{XYZ}$  as a function of real stresses, endurance stress limit and operating conditions. The letters XYZ in the designation  $a_{XYZ}$  indicate that a manufacturer or organization can select any combination and number of letters.

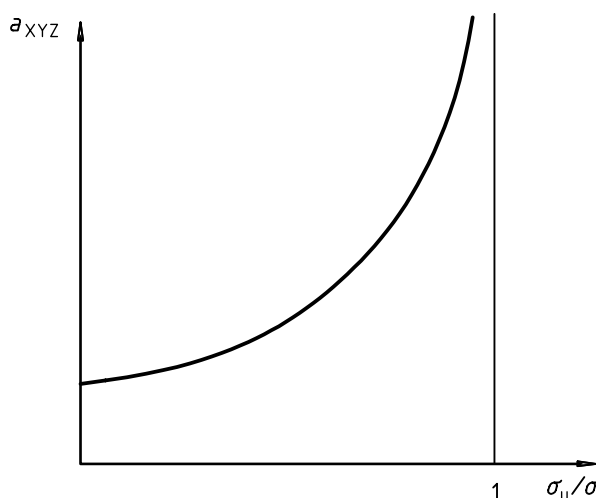


Figure 1 — Life modification factor  $a_{XYZ}$