



SLOVENSKI STANDARD SIST EN 3475-515:2009

01-oktober-2009

5 YfcbUj h_U!`9`Y_f] b]_UW]nUi dcfUWc`j`nfU b]`d`cj]]`!`DfYg_i gbY'a YrcXY!
)% "XY. `CXdcfbcghdfch`XfcV`Yb1

Aerospace series - Cable, electrical, aircraft use - Test methods - Part 515: Crush resistance

Luft- und Raumfahrt - Elektrische Leitungen für Luftfahrtverwendung - Prüfverfahren - Teil 515: Querdruckfestigkeit

Série aérospatiale - Câbles électriques à usage aéronautique - Méthodes d'essais - Partie 515: Résistance à l'écrasement

<https://standards.iteh.ai/catalog/standards/sist/fl2b4cf5-65cc-4b27-932b-6a90b6fb3e2c/sist-en-3475-515-2009>

Ta slovenski standard je istoveten z: EN 3475-515:2009

ICS:

49.060 Š^cp\ æš Ą^•[|b\ æ Aerospace electric
^|\ dā} æ] !^ { æš Ą ã c^ { ã equipment and systems

SIST EN 3475-515:2009

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 3475-515:2009

<https://standards.iteh.ai/catalog/standards/sist/f12b4cf5-65cc-4b27-932b-6a90b6fb3e2c/sist-en-3475-515-2009>

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

EN 3475-515

August 2009

ICS 49.060

English Version

**Aerospace series - Cable, electrical, aircraft use - Test methods
- Part 515: Crush resistance**

Série aérospatiale - Câbles électriques à usage
aéronautique - Méthodes d'essais - Partie 515: Résistance
à l'écrasement

Luft- und Raumfahrt - Elektrische Leitungen für
Luftfahrtverwendung - Prüfverfahren - Teil 515:
Querdruckfestigkeit

This European Standard was approved by CEN on 20 June 2009.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

[SIST EN 3475-515:2009](https://standards.iteh.ai/catalog/standards/sist/fl2b4cf5-65cc-4b27-932b-6a90b6fb3e2c/sist-en-3475-515-2009)

<https://standards.iteh.ai/catalog/standards/sist/fl2b4cf5-65cc-4b27-932b-6a90b6fb3e2c/sist-en-3475-515-2009>



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents

Page

Foreword.....	3
1 Scope	4
2 Normative references	4
3 Preparation of specimens	4
4 Tests conditions	4
5 Apparatus	5
6 Method	5

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 3475-515:2009](#)

<https://standards.iteh.ai/catalog/standards/sist/fl2b4cf5-65cc-4b27-932b-6a90b6fb3e2c/sist-en-3475-515-2009>

Foreword

This document (EN 3475-515:2009) has been prepared by the Aerospace and Defence Industries Association of Europe - Standardization (ASD-STAN).

After enquiries and votes carried out in accordance with the rules of this Association, this Standard has received the approval of the National Associations and the Official Services of the member countries of ASD, prior to its presentation to CEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by February 2010, and conflicting national standards shall be withdrawn at the latest by February 2010.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

ITEH STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 3475-515:2009](https://standards.iteh.ai/catalog/standards/sist/fl2b4cf5-65cc-4b27-932b-6a90b6fb3e2c/sist-en-3475-515-2009)

<https://standards.iteh.ai/catalog/standards/sist/fl2b4cf5-65cc-4b27-932b-6a90b6fb3e2c/sist-en-3475-515-2009>

EN 3475-515:2009 (E)**1 Scope**

This standard specifies a method to determine the ability of an electrical cable to withstand crushing under specified environmental conditions (e.i. during maintenance operations).

It shall be used together with EN 3475-100.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 3475-100, *Aerospace series — Cables, electrical, aircraft use — Test methods — Part 100: General.*

EN 3475-201, *Aerospace series — Cables, electrical, aircraft use — Test methods — Part 201: Visual examination.*

EN 3475-805, *Aerospace series — Cables, electrical, aircraft use — Test methods — Part 805: Characteristic impedance.*

EN 3475-806, *Aerospace series — Cables, electrical, aircraft use — Test methods — Part 806: Attenuation.*

EN 3475-812, *Aerospace series — Cables, electrical, aircraft use — Test methods — Part 812: Return loss (VSWR).*

STANDARD PREVIEW
(standards.iteh.ai)

3 Preparation of specimens

[SIST EN 3475-515:2009](https://standards.iteh.ai/catalog/standards/sist/fl2b4cf5-65cc-4b27-932b-6a90b6fb3e2c/sist-en-3475-515-2009)

<https://standards.iteh.ai/catalog/standards/sist/fl2b4cf5-65cc-4b27-932b-6a90b6fb3e2c/sist-en-3475-515-2009>

Connectors shall be fitted on each end of the test specimens (coaxial cables) to be connected to the measuring device.

— Length of specimens: 2 m, unless otherwise defined in product standard.

4 Tests conditions

Unless otherwise specified in the product standard, the following test conditions shall be applied:

— Temperature at which test is carried out = 20 °C;

— Number of specimens: 3.

The following requirements shall be specified in the product standard:

— The frequency band of the measurements (DC up to the maximum frequency of the standard if not specified otherwise);

— The compressive force to be applied;


— The duration of the application of the load.

5 Apparatus

The apparatus shall allow a sample to be crushed between a flat steel base plate and a movable steel plate which applies gradually, by any convenient method, the crushing force uniformly over a **100 mm** length of the sample. The plates shall be suitably radiused to prevent sharp edges digging into the specimen.

Suitable apparatus is shown in Figure 1.

Dimensions in millimetres

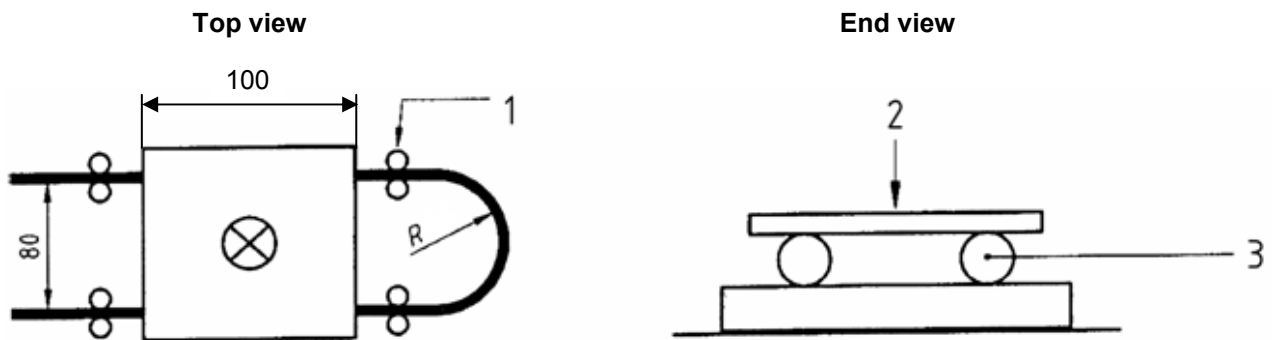

Key

- 1 Guide
- 2 Load
- 3 Specimen

iTeh STANDARD PREVIEW
(standards.iteh.ai)

R = minimum bend radius as defined in the product standard of the cable under test.

[SIST EN 3475-515:2009](https://standards.iteh.ai/catalog/standards/sist/fl2b4cf5-65cc-4b27-932b-6a90b6f3e2c/sist-en-3475-515-2009)

[https://standards.iteh.ai/catalog/standards/sist/fl2b4cf5-65cc-4b27-932b-](https://standards.iteh.ai/catalog/standards/sist/fl2b4cf5-65cc-4b27-932b-6a90b6f3e2c/sist-en-3475-515-2009)

[6a90b6f3e2c/sist-en-3475-515-2009](https://standards.iteh.ai/catalog/standards/sist/fl2b4cf5-65cc-4b27-932b-6a90b6f3e2c/sist-en-3475-515-2009)

Figure 1 — Test methods

6 Method

6.1 Measurements

Measurements, at specified frequency band, shall be performed according to their specific test standards, for:

- EN 3475-805: Characteristic impedance;
- EN 3475-806: Attenuation;
- EN 3475-812: Return loss.

6.2 Test procedure

Place the specimen in the test fixture.

Step 1 : With no load applied, obtain the initial measurement for each test.

Step 2 : The load shall be applied at a constant rate of loading as specified in the product standard until the required applied load is obtained.

Step 3 : The load shall be maintained for the specified period.

EN 3475-515:2009 (E)

Step 4 : Remove the load.

Step 5 : When the load has been fully removed allow the specimen to recover for 15 min.

The variation of the return loss (EN 3475-812), shall be monitored continuously throughout the test.

6.3 Final measurements

Step 1 : the following tests should be carried out:

- EN 3475-201: Visual examination
- EN 3475-805: Characteristic impedance;
- EN 3475-806: Attenuation;
- EN 3475-812: Return loss.

6.4 Requirements

Characteristic impedance, attenuation and return loss, before (step 1) and after (step 5) test shall be within the requirements of the product standard.

The return loss values during the test (step 3 and step 4) shall be recorded.

ITeH STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 3475-515:2009](https://standards.iteh.ai/catalog/standards/sist/fl2b4cf5-65cc-4b27-932b-6a90b6fb3e2c/sist-en-3475-515-2009)

<https://standards.iteh.ai/catalog/standards/sist/fl2b4cf5-65cc-4b27-932b-6a90b6fb3e2c/sist-en-3475-515-2009>