

5 YfcbUj h\_U! '8 cXUh\_j'nUc\_fc[ `Y]b'dfUj c\_chbYYY\_hf] bY]b'cdh] bY'\_cbY\_hcfY!  
\$\* ( "XY. '? UYg\_Ugdc^\_UZh'd'? žfUj bUžnU'hd`c'hc`g\_f `j YXYŽc`\_cd`YbUž  
hYgbYbUžgUa cnUd]fU'bnU'9B'&- +]b'9B'(\$\* +!'GhU'X'X'nU'dfc]nj cX

Aerospace series - Cable outlet accessories for circular and rectangular electrical and optical connectors - Part 064: Cable outlet, style K, straight, for heat shrinkable boot, shielded, sealed, self-locking for EN 2997 and EN 4067 - Product standard

## iTeh STANDARD PREVIEW

Luft- und Raumfahrt - Endgehäuse für elektrische und optische Rund- und Rechtecksteckverbinder - Teil 064: Endgehäuse, Bauform K, gerade, für warmeschrumpfende Bauteile, Schirmanschluß, abgedichtet, selbstsichernd für EN 2997 und EN 4067 - Produktnorm [SIST EN 3660-064:2010](https://standards.iteh.ai/catalog/standards/sist/01514b4f-b3f8-4df2-93d6-5f64c8523f18/sist-en-3660-064-2010)

<https://standards.iteh.ai/catalog/standards/sist/01514b4f-b3f8-4df2-93d6-5f64c8523f18/sist-en-3660-064-2010>

Série aérospatiale - Accessoires arrière pour connecteurs circulaires et rectangulaires électriques et optiques - Partie 064: Raccord type K, droit, blindé, étanche, pour manchon thermorétractable, auto-freiné pour EN 2997 et EN 4067 - Norme de produit

**Ta slovenski standard je istoveten z: EN 3660-064:2009**

### ICS:

49.060 Š^æ\ æ Å Å^•[ |b\ æ Aerospace electric  
^|\ dā} æ ] ^{ æ Å ā c{ ā equipment and systems

**SIST EN 3660-064:2010**

**en**

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST EN 3660-064:2010

<https://standards.iteh.ai/catalog/standards/sist/01514b4f-b3f8-4df2-93d6-5f64c8523f18/sist-en-3660-064-2010>

EUROPEAN STANDARD

EN 3660-064

NORME EUROPÉENNE

EUROPÄISCHE NORM

November 2009

ICS 49.060

English Version

**Aerospace series - Cable outlet accessories for circular and rectangular electrical and optical connectors - Part 064: Cable outlet, style K, straight, for heat shrinkable boot, shielded, sealed, self-locking for EN 2997 and EN 4067 - Product standard**

Série aérospatiale - Accessoires arrière pour connecteurs circulaires et rectangulaires électriques et optiques - Partie 064 : Raccord type K, droit, blindé, étanche, pour manchon thermorétractable, auto-freiné pour EN 2997 et EN 4067 - Norme de produit

Luft- und Raumfahrt - Endgehäuse für elektrische und optische Rund- und Rechtecksteckverbinder - Teil 064: Endgehäuse, Bauform K, gerade, für wärmeschrumpfende Bauteile, Schirmanschluß, abgedichtet, selbstsichernd für EN 2997 und EN 4067 - Produktnorm

This European Standard was approved by CEN on 20 June 2009.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION  
COMITÉ EUROPÉEN DE NORMALISATION  
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: Avenue Marnix 17, B-1000 Brussels

**Contents**

Page

Foreword.....	3
1 Scope .....	4
2 Normative references .....	4
3 Terms and definitions .....	4
4 Characteristics .....	5
5 Tests.....	10
6 Identification .....	15
7 Marking .....	16
8 Technical specification .....	16

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST EN 3660-064:2010

<https://standards.iteh.ai/catalog/standards/sist/01514b4f-b3f8-4df2-93d6-5f64c8523f18/sist-en-3660-064-2010>

## Foreword

This document (EN 3660-064:2009) has been prepared by the Aerospace and Defence Industries Association of Europe - Standardization (ASD-STAN).

After enquiries and votes carried out in accordance with the rules of this Association, this Standard has received the approval of the National Associations and the Official Services of the member countries of ASD, prior to its presentation to CEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by May 2010, and conflicting national standards shall be withdrawn at the latest by May 2010.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

**ITEH STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST EN 3660-064:2010

<https://standards.iteh.ai/catalog/standards/sist/01514b4f-b3f8-4df2-93d6-5f64c8523f18/sist-en-3660-064-2010>

**EN 3660-064:2009 (E)****1 Scope**

This European Standard defines a range of cable outlets, style K, for use under the following conditions:

The mating connectors are listed in EN 3660-002.

Temperature range, Class F : – 65 °C to 200 °C;  
 Class K : – 65 °C to 260 °C;  
 Class W : – 65 °C to 175 °C.

Associated electrical accessories : EN 3660-033 Metallic band (for shield termination backshells).

These cable outlets are designed for termination of overall shielding braid or individual cable shields. They accommodate/permit the termination of heat shrinkable boots.

**2 Normative references**

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 2591-100\*, *Aerospace series — Elements of electrical and optical connection — Test methods — Part 100: General*

EN 2997 (all parts), *Aerospace series — Connectors, electrical, circular, coupled by threaded ring, fire-resistant or non fire-resistant, operating temperatures - 65 °C to 175 °C continuous, 200 °C continuous, 260 °C peak*

<https://standards.iteh.ai/catalog/standards/sist/01514b4f-b3f8-4df2-93d6-550ef52c2330/en-3660-064:2010>

EN 3660-001, *Aerospace series — Cable outlet accessories for circular and rectangular electrical and optical connectors — Part 001: Technical specification*

EN 3660-002, *Aerospace series — Cable outlet accessories for circular and rectangular electrical and optical connectors — Part 002: Index of product standards*

EN 3660-033, *Aerospace series — Cable outlet accessories for circular and rectangular electrical and optical connectors — Part 033: Metallic band — Product standard* <sup>1)</sup>

AS85049A, *Connector accessories, electrical general specification for* <sup>2)</sup>

DIN 82, *Knurling*

**3 Terms and definitions**

For the purposes of this document, the terms and definitions given in EN 3660-001:2006 apply.

---

\* As well as all parts of EN 2591 quoted in this standard.

1) In preparation at the date of publication of this standard.

2) Published by: Society of Automotive Engineers, Inc. (SAE), 400 Commonwealth Drive, Warrendale, PA 15096-0001.


## 4 Characteristics

### 4.1 Dimensions and mass

For dimensions and mass, see Figure 1 and Table 1 to Table 4.

For cable entry dimensions, see 4.2.

Dimensions in millimetres

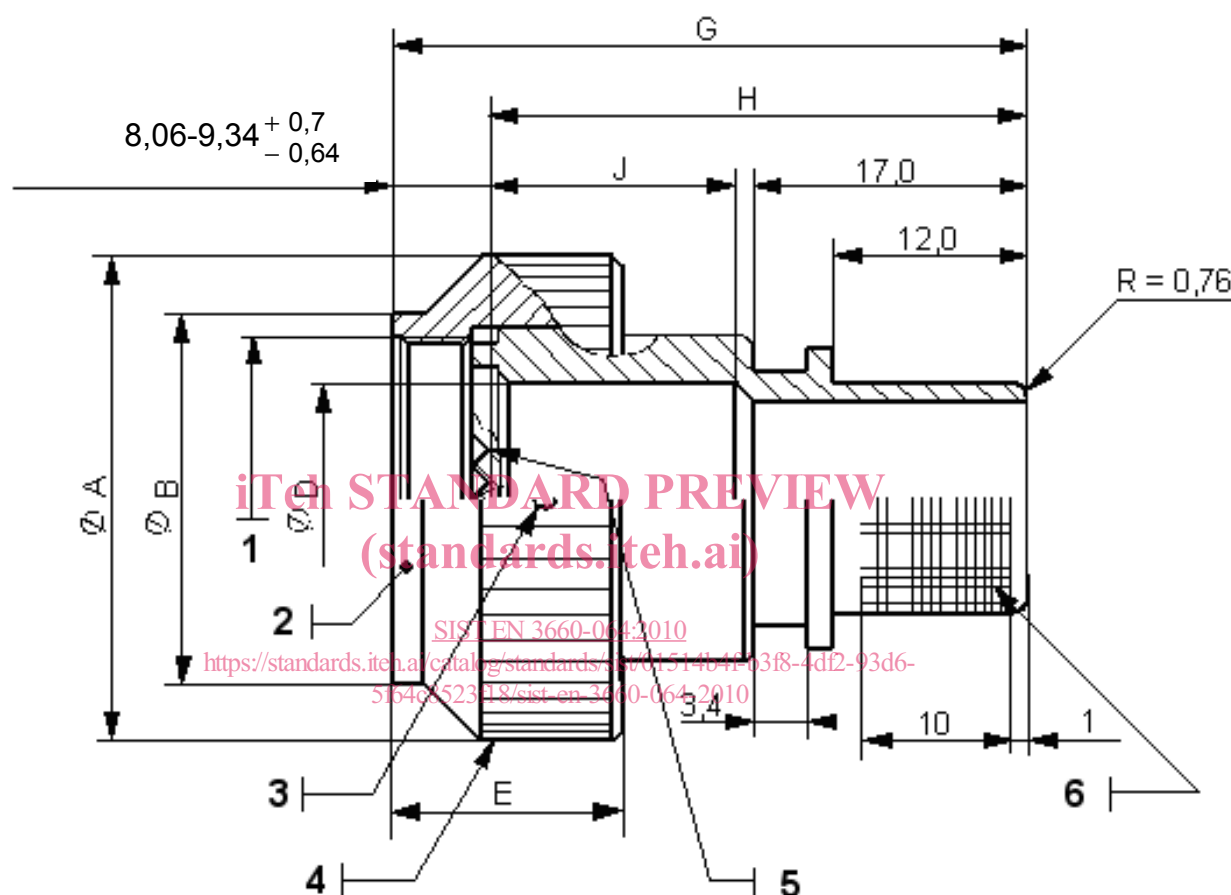

## Key

- 1 Thread  $C$
- 2 Marking
- 3 Four holes  $\varnothing 2,8$  for tools, depth = 1,27
- 4 RAA 1,0 DIN 82 knurling
- 5 Number of teeth  $N$
- 6 RKV 08 DIN 82 knurling

**Figure 1 — Cable outlet**

Table 1 — Fixed dimensions of shell

Dimensions in millimetres

Shell size	<i>A</i> max.	<i>B</i> max.	<i>C</i> Thread	<i>D</i> 0 – 0,25	<i>E</i> max.	<i>N</i> Number of teeth
08	22,48	15,67	0.500-20UNF	6,86	15,3	12
10	25,65	18,64	0.625-24UNEF	9,53	15,3	15
12	28,83	21,79	0.750-20UNEF	12,98	15,3	21
14	32,00	24,99	0.875-20UNEF	14,86	15,3	24
16	35,18	28,24	1.000-20UNEF	18,03	15,3	30
18	38,55	30,94	1.062-18UNEF	20,04	15,3	33
20	41,53	34,16	1.188-18UNEF	23,22	15,3	36
22	44,70	37,29	1.312-18UNEF	26,39	15,3	39
24	47,89	40,46	1.438-18UNEF	29,31	15,3	42

Table 2 — Variable dimensions of wiring chamber

Dimensions in millimetres

Length code wiring chamber	<i>G</i> max.	<i>H</i> max.	<i>J</i>
A	34,6	26,3	7,40
B	42,6	34,3	15,40
C	47,6	39,3	20,40
D	57,6	49,3	30,40
The code and dimensions of the wiring chamber shall be valid for all sizes of backshell.			



Table 3 — Mass for classes F and W

Mass in grams

Shell size code	End-fitting size code												Length code wiring chamber
	A	B	C	D	E	F	G	H	J	K	L	M	
08	—	—	—	—	—	—	—	—	—	—	—	—	—
10	—	—	—	—	—	—	—	—	—	—	—	—	—
12	—	—	—	—	—	—	—	—	—	—	—	—	—
14	—	14,3	14,3	—	—	—	—	—	—	—	—	—	B
16	—	—	—	—	—	—	—	—	—	—	—	—	—
18	—	—	—	—	—	—	—	—	—	—	—	—	—
20	—	—	—	23,9	—	—	—	—	—	—	—	—	B
22	—	—	—	—	—	—	—	—	—	—	—	—	—
24	—	—	—	—	—	—	—	—	—	—	—	—	—

Table 4 — Mass for class K

Mass in grams

Shell size code	End-fitting size code												Length code wiring chamber
	A	B	C	D	E	F	G	H	J	K	L	M	
08	32,5	33,9	—	—	—	—	—	—	—	—	—	—	B
10	39,3	40,4	—	—	—	—	—	—	—	—	—	—	B
12	—	—	44,7	—	—	—	—	—	—	—	—	—	B
14	—	—	—	—	—	—	—	—	—	—	—	—	—
16	—	—	—	—	—	—	—	—	—	—	—	—	—
18	—	—	—	65,2	—	—	—	—	—	—	—	—	B
20	—	—	—	—	—	—	—	—	—	—	—	—	—
22	—	—	—	—	—	83,3	—	—	—	—	—	—	B
24	—	—	—	—	—	—	96,8	—	—	—	—	—	B

## 4.2 Cable entry dimensions

See Figure 2 and Table 5.