
**Tool shanks with 7/24 taper for automatic
tool changers —**

Part 3:

**Retention knobs for shanks of forms AC,
AD, AF, UC, UD, UF, JD and JF**

iTeh STANDARD PREVIEW
*Queues d'outils à conicité 7/24 pour changement automatique
d'outils —*
(standards.iteh.ai)

*Partie 3: Tirettes pour queues de formes AC, AD, AF, UC, UD, UF, JD
et JF*

ISO 7388-3:2007

<https://standards.iteh.ai/catalog/standards/sist/d48e01b4-624e-49da-a17b-8b734cbc3a85/iso-7388-3-2007>



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 7388-3:2007](https://standards.iteh.ai/catalog/standards/sist/d48e01b4-624e-49da-a17b-8b734cbc3a85/iso-7388-3-2007)

<https://standards.iteh.ai/catalog/standards/sist/d48e01b4-624e-49da-a17b-8b734cbc3a85/iso-7388-3-2007>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2007

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 7388-3 was prepared by Technical Committee ISO/TC 29, *Small tools*.

ISO 7388 consists of the following parts, under the general title *Tool shanks with 7/24 taper for automatic tool changers*:

- ITEC STANDARD PREVIEW
(standards.iteh.ai)
- Part 1: *Dimensions and designation of shanks of forms A, AD, AF, U, UD and UF*
 - Part 2: *Dimensions and designation of shanks of forms J, JD and JF*
 - Part 3: *Retention knobs for shanks of forms AC, AD, AF, UC, UD, UF, JD and JF*

Introduction

The aim of ISO 7388 is to integrate existing standards which are most commonly used as an industrial standard. In addition, the different developments for cooling and data chip have been taken into account.

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 7388-3:2007

<https://standards.iteh.ai/catalog/standards/sist/d48e01b4-624e-49da-a17b-8b734cbc3a85/iso-7388-3-2007>

Tool shanks with 7/24 taper for automatic tool changers —

Part 3: Retention knobs for shanks of forms AC, AD, AF, UC, UD, UF, JD and JF

1 Scope

This part of ISO 7388 specifies the dimensions of retention knobs for tool shanks with a 7/24 taper of shank forms A, AD, AF, UC, UD, UF, JD and JF, for automatic tool changers, used on machines having an automatic gripping system for feeding tools from the magazine to the spindle and vice-versa. These tools are designed with the most important dimensions for use in spindle noses according to ISO 9270.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

- ISO 1629, *Rubber and latices — Nomenclature*
- ISO 2768-1, *General tolerances — Part 1: Tolerances for linear and angular dimensions without individual tolerance indications*
- ISO 2768-2, *General tolerances — Part 2: Geometrical tolerances for features without individual tolerance indications*
- ISO 8015, *Technical drawings — Fundamental tolerancing principle*


3 Dimensions

3.1 General

All dimensions and tolerances are given in millimetres; tolerancing is according to ISO 8015. Tolerances not specified shall be of tolerance class “m” in accordance with ISO 2768-1 and of class “k” in accordance with ISO 2768-2.

3.2 Retention knobs, shank form AD, for centric inner cooling lubricant supply

See Figure 1 and Table 1.

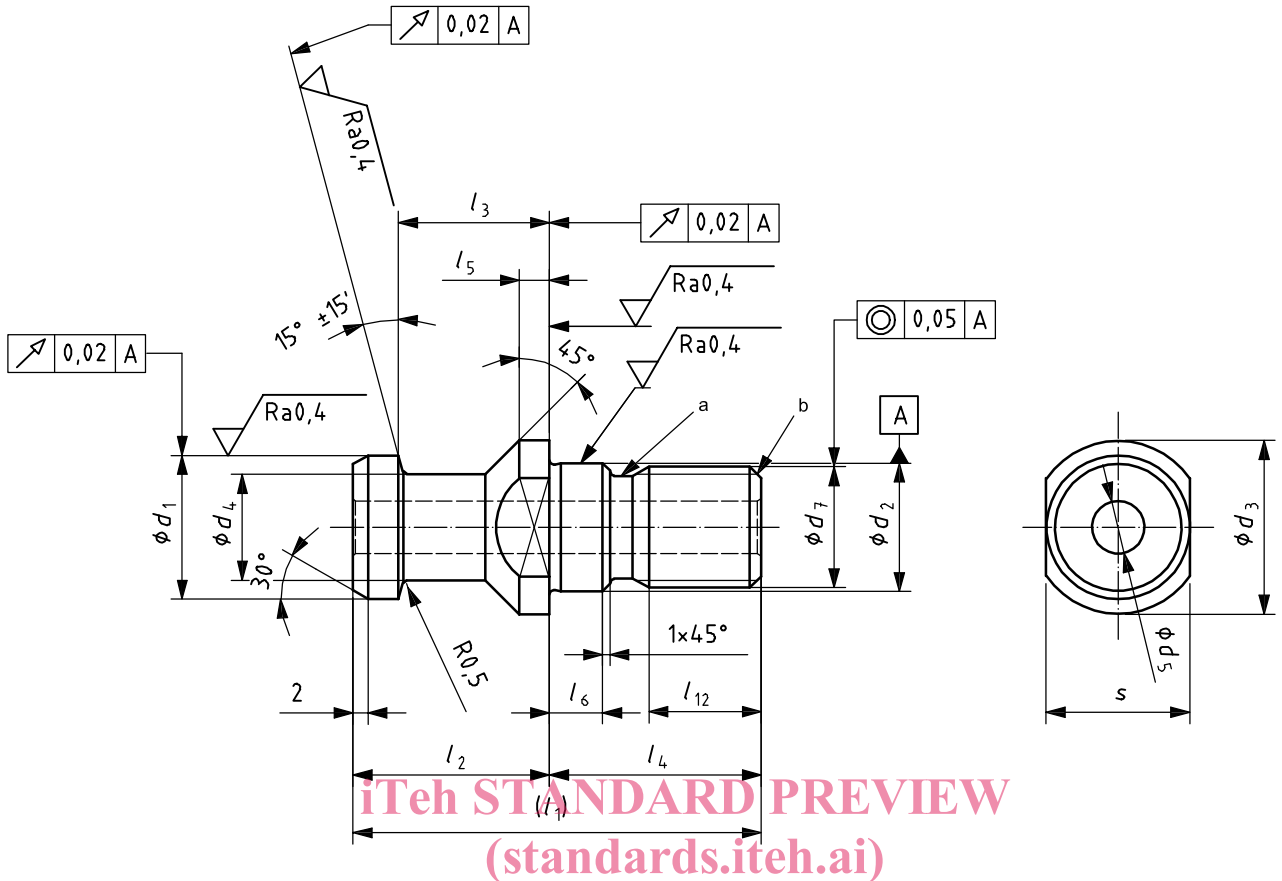

a Thread undercut, at the manufacturer's discretion.

b Chamfered end (CH), according to ISO 4753. [ISO 7388-3:2007](https://standards.iteh.ai/catalog/standards/sist/d48e01b4-624e-49da-a17b-1b73f3688e-7e6e2010)

<https://standards.iteh.ai/catalog/standards/sist/d48e01b4-624e-49da-a17b-1b73f3688e-7e6e2010>

Figure 1 — Retention knob — Form AD — Centric inner cooling supply

Table 1 — Retention knobs — Form AD — Dimensions

Shank no.	Dimension													
	d_1	d_2	d_3	d_4	d_5	d_7	l_1	l_2	l_3	l_4	l_5	l_6	l_{12}	s
	f7	f7	$\begin{matrix} 0 \\ -0,2 \end{matrix}$	$\begin{matrix} 0 \\ -0,1 \end{matrix}$	$\begin{matrix} +0,1 \\ 0 \end{matrix}$			$\pm 0,1$	$\pm 0,1$	$\begin{matrix} +0,5 \\ 0 \end{matrix}$			min.	$\begin{matrix} 0 \\ -0,1 \end{matrix}$
30	13	13	17	9	—	M12	44	24	19	20	4	5	10	14
40	19	17	23	14	7	M16	54	26	20	28	4	7	13	19
45	23	21	30	17	9,5	M20	65	30	23	35	5	8	16	24
50	28	25	36	21	11,5	M24	74	34	25	40	5	10	19	30
60	40	32	52	30	14	M30	90	40	30	50	6	12	24	46

3.3 Retention knobs, shank form AF, without cooling lubricant supply

See Figure 2 and Table 2. Other dimensions are as for shank form AD.

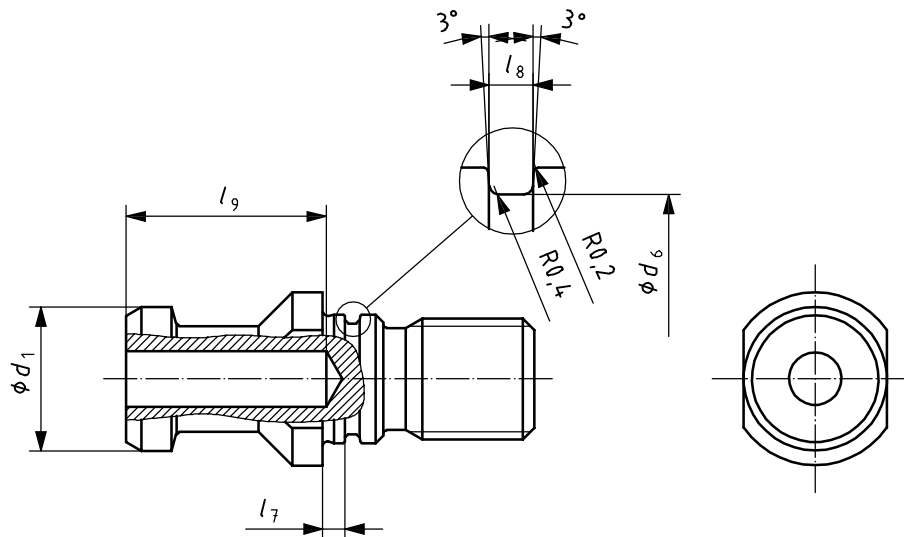


Figure 2 — Retention knob — Form AF — Without cooling lubricant supply


iteh STANDARD PREVIEW
(standards.iteh.ai)

Table 2 — Retention knobs — Form AF — Dimensions

Shank no.	Dimension					O-ring
	d_1	d_6	l_7	l_8	l_9	
	f7	h11	$\begin{matrix} 0 \\ -0,1 \end{matrix}$	$\begin{matrix} +0,2 \\ 0 \end{matrix}$	$\begin{matrix} +1 \\ 0 \end{matrix}$	
30	13	11,5	2,3	1,4	—	11 × 1,0
40	19	14,6	3,0	1,9	27	14 × 1,5
45	23	17,8	3,3	2,5	33	17 × 2,0
50	28	20,8	4,5	3,0	37	20 × 2,5
60	40	27,8	5,5	3,0	45	27 × 2,5

3.4 Retention knobs, shank form UD, for centric inner cooling lubricant supply

See Figure 3 and Table 3.

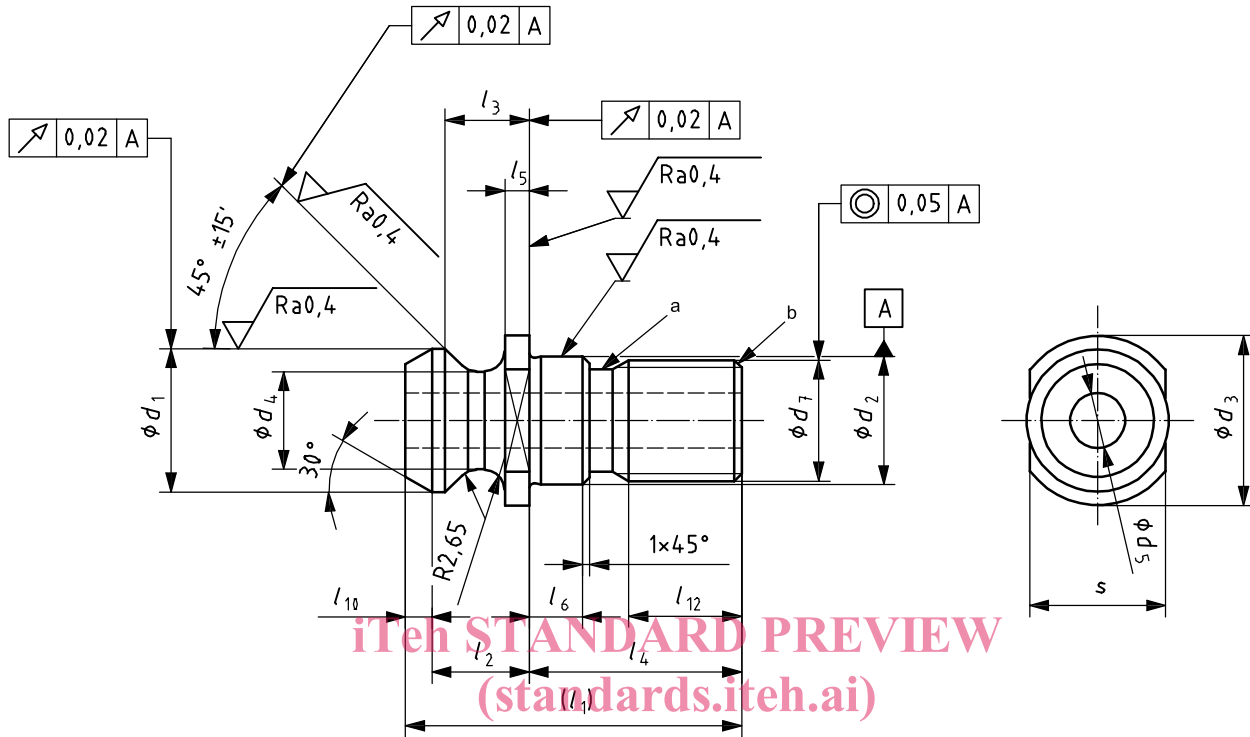

- a Thread undercut, at the manufacturer's discretion. [ISO 7388-3:2007](https://standards.iteh.ai/catalog/standards/sist/d48e01b4-624e-49da-a17b-8b734cbc3a85/iso-7388-3-2007)
- b Chamfered end (CH), according to ISO 4753. <https://standards.iteh.ai/catalog/standards/sist/d48e01b4-624e-49da-a17b-8b734cbc3a85/iso-7388-3-2007>

Figure 3 — Retention knob — Form UD — Centric inner cooling lubricant supply

Table 3 — Retention knobs — Form UD — Dimensions

Shank no.	Dimension															
	d_1	d_2	d_3		d_4	d_5	d_7	l_1	l_2	l_3	l_4	l_5	l_6	l_{10}	s	
	$\begin{matrix} 0 \\ -0,3 \end{matrix}$	h6	nom.	tol.	$\begin{matrix} 0 \\ -0,3 \end{matrix}$	$\begin{matrix} +0,1 \\ 0 \end{matrix}$			$\begin{matrix} 0 \\ -0,2 \end{matrix}$	$\begin{matrix} 0 \\ -0,3 \end{matrix}$		$\begin{matrix} 0 \\ -0,5 \end{matrix}$	$\begin{matrix} 0 \\ -0,5 \end{matrix}$	$\begin{matrix} 0 \\ -0,5 \end{matrix}$	nom.	tol.
30	13,35	13	16,5	$\begin{matrix} 0 \\ -0,5 \end{matrix}$	9,3	4,15	M12	31,8	11,8	8,15	20	2,75	5	2,4	13	$\begin{matrix} 0 \\ -0,27 \end{matrix}$
40	18,95	17	22,5	$\begin{matrix} 0 \\ -1 \end{matrix}$	12,95	7,35	M16	44,4	16,4	11,15	28	3,25	7	3,5	18	$\begin{matrix} 0 \\ -0,33 \end{matrix}$
45	24,05	21	30	$\begin{matrix} 0 \\ -2 \end{matrix}$	16,3	9,25	M20	55,95	20,95	14,85	35	4,25	8	3,85	24	$\begin{matrix} 0 \\ -0,39 \end{matrix}$
50	29,1	25	37		19,6	11,55	M24	65,55	25,55	17,95	40	5,25	10	4,85	30	$\begin{matrix} 0 \\ -0,65 \end{matrix}$
60	37,25	32	50		24,95	13,85	M30	88,15	38,15	27,65	50	7,75	12	6,75	36	$\begin{matrix} 0 \\ -0,75 \end{matrix}$

3.5 Retention knobs, shank form UF, without cooling lubricant supply

See Figure 4 and Table 4. Other dimensions are as for shank form UD.

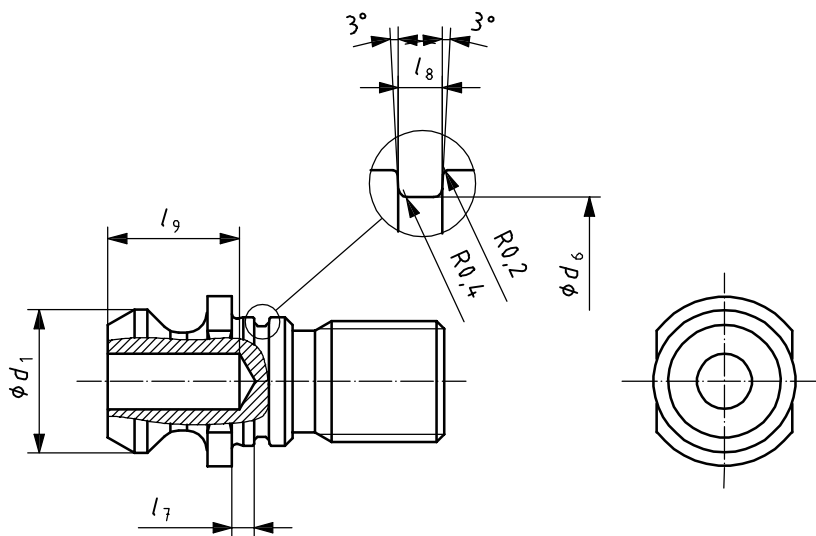


Figure 4 — Retention knob — Form UF — Without cooling lubricant supply

iTeh STANDARD PREVIEW
 (standards.iteh.ai)

Table 4 — Retention knob — Form UF — Dimensions

Shank no.	Dimension					O-ring
	d_1	d_6	l_7	l_8	l_9	
	$\begin{matrix} 0 \\ -0,3 \end{matrix}$	h11		$\begin{matrix} +0,2 \\ 0 \end{matrix}$		
30	13,35	11,5	2,3	1,4	—	11 × 1,0
40	18,95	14,6	3,0	1,9	27	14 × 1,5
45	24,05	17,8	3,3	2,5	33	17 × 2,0
50	29,1	20,8	4,5	3,0	37	20 × 2,5
60	37,25	27,8	5,5	3,0	45	27 × 2,5