



**SLOVENSKI STANDARD**  
**SIST EN 301 908-14 V5.2.1:2011**  
**01-junij-2011**

---

**Celična omrežja IMT - Harmonizirani EN, ki zajema bistvene zahteve člena 3.2  
direktive R&TTE - 14. del: Bazne postaje za razviti prizemni radijski dostop za  
UMTS  
(E-UTRA)**

IMT cellular networks - Harmonized EN covering the essential requirements of article 3.2  
of the R&TTE Directive - Part 14: Evolved Universal Terrestrial Radio Access (E-UTRA)  
Base Stations (BS)

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

<https://standards.iteh.ai/catalog/standards/sist/ef1c4f8-98a0-4f78-b521-55eef57fa365/sist-en-301-908-14-v5-2-1-2011>

**Ta slovenski standard je istoveten z: EN 301 908-14 Version 5.2.1**

---

**ICS:**

33.060.99	Druga oprema za radijske komunikacije	Other equipment for radiocommunications
33.100.01	Elektromagnetna združljivost na splošno	Electromagnetic compatibility in general

**SIST EN 301 908-14 V5.2.1:2011**                      **en**

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST EN 301 908-14 V5.2.1:2011

<https://standards.iteh.ai/catalog/standards/sist/efa1c4f8-98a0-4f78-b521-55eef57fa365/sist-en-301-908-14-v5-2-1-2011>

# ETSI EN 301 908-14 V5.2.1 (2011-05)

---

*Harmonized European Standard*

**IMT cellular networks;  
Harmonized EN covering the essential requirements  
of article 3.2 of the R&TTE Directive;  
Part 14: Evolved Universal Terrestrial Radio Access (E-UTRA)  
Base Stations (BS)**

---

**iTeh STANDARD PREVIEW  
(standards.iteh.ai)**

[SIST EN 301 908-14 V5.2.1:2011](https://standards.iteh.ai/catalog/standards/sist/efa1c4f8-98a0-4f78-b521-55eef57fa365/sist-en-301-908-14-v5-2-1-2011)

<https://standards.iteh.ai/catalog/standards/sist/efa1c4f8-98a0-4f78-b521-55eef57fa365/sist-en-301-908-14-v5-2-1-2011>



## Reference

---

REN/MSG-TFES-008-14

## Keywords

---

3G, 3GPP, cellular, digital, IMT, IMT-2000, mobile, radio, regulation, UMTS, E-UTRA, LTE

**ETSI**

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

---

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° 7803/88

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST EN 301 908-14 V5.2.1:2011

<https://standards.iteh.ai/catalog/standards/sist/ef1c4f8-98a0-4f78-b521-55ee57fa307a/sist-en-301-908-14-v5-2-1-2011>

**Important notice**

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

[http://portal.etsi.org/chaicor/ETSI\\_support.asp](http://portal.etsi.org/chaicor/ETSI_support.asp)

---

**Copyright Notification**

No part may be reproduced except as authorized by written permission.  
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2011.  
All rights reserved.

**DECT™**, **PLUGTESTS™**, **UMTS™**, **TIPHON™**, the TIPHON logo and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.

**3GPP™** is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

**LTE™** is a Trade Mark of ETSI currently being registered

for the benefit of its Members and of the 3GPP Organizational Partners.

**GSM®** and the GSM logo are Trade Marks registered and owned by the GSM Association.

# Contents

Intellectual Property Rights .....	6
Foreword.....	6
Introduction .....	7
1 Scope .....	8
2 References .....	8
2.1 Normative references .....	8
2.2 Informative references.....	9
3 Definitions, symbols and abbreviations .....	9
3.1 Definitions .....	9
3.2 Symbols.....	11
3.3 Abbreviations .....	12
4 Technical requirements specifications .....	13
4.1 Environmental profile.....	13
4.2 Conformance requirements .....	13
4.2.1 Introduction.....	13
4.2.2 Operating band unwanted emissions .....	14
4.2.2.1 Definition .....	14
4.2.2.2 Limits .....	15
4.2.2.2.1 Limits for Wide Area BS (Bands 1, 3, 8, 33 and 34).....	15
4.2.2.2.2 Limits for Wide Area BS (Bands 7 and 38).....	16
4.2.2.2.3 Limits for Wide Area BS (Band 20).....	17
4.2.2.2.4 Limits for Local Area BS .....	17
4.2.2.2.5 Limits for Home BS .....	18
4.2.2.2.6 Limits for protection of DTT .....	19
4.2.2.2.7 Limits for protection of adjacent band services .....	19
4.2.2.3 Conformance.....	19
4.2.3 Adjacent Channel Leakage power Ratio (ACLR) .....	20
4.2.3.1 Definition .....	20
4.2.3.2 Limits .....	20
4.2.3.3 Conformance.....	21
4.2.4 Transmitter spurious emissions.....	21
4.2.4.1 Definition .....	21
4.2.4.2 Limits .....	22
4.2.4.2.1 Spurious emissions .....	22
4.2.4.2.2 Co-existence with other systems .....	22
4.2.4.2.3 Protection of the BS receiver of own or different BS.....	24
4.2.4.2.4 Co-existence with Home BS operating in other bands .....	24
4.2.4.3 Conformance.....	24
4.2.5 Base Station maximum output power .....	24
4.2.5.1 Definition .....	24
4.2.5.2 Limit.....	24
4.2.5.3 Conformance.....	25
4.2.6 Transmitter intermodulation .....	25
4.2.6.1 Definition .....	25
4.2.6.2 Limit.....	25
4.2.6.3 Conformance.....	26
4.2.7 Receiver spurious emissions .....	26
4.2.7.1 Definition .....	26
4.2.7.2 Limit.....	26
4.2.7.3 Conformance.....	26
4.2.8 Blocking characteristics .....	26
4.2.8.1 Definition .....	26
4.2.8.2 Limit.....	27

4.2.8.3	Conformance .....	28
4.2.9	Receiver intermodulation characteristics .....	28
4.2.9.1	Definition .....	28
4.2.9.2	Limit .....	29
4.2.9.3	Conformance .....	31
4.2.10	Adjacent Channel Selectivity (ACS) and narrow-band blocking .....	31
4.2.10.1	Definition .....	31
4.2.10.2	Limit .....	31
4.2.10.3	Conformance .....	34
4.2.11	Home BS output power for adjacent UTRA channel protection .....	34
4.2.11.1	Definition .....	34
4.2.11.2	Limit .....	34
4.2.11.3	Conformance .....	35
4.2.12	Home BS output power for adjacent E-UTRA channel protection .....	35
4.2.12.1	Definition and applicability .....	35
4.2.12.2	Limit .....	35
4.2.12.3	Conformance .....	36
5	Testing for compliance with technical requirements .....	36
5.1	Environmental conditions for testing .....	36
5.2	Interpretation of the measurement results .....	37
5.3	Essential radio test suites .....	38
5.3.1	Operating band unwanted emissions .....	38
5.3.1.1	Initial conditions .....	38
5.3.1.2	Procedure .....	38
5.3.2	Adjacent Channel Leakage power Ratio (ACLR) .....	38
5.3.2.1	Initial conditions .....	38
5.3.2.2	Procedure .....	39
5.3.3	Transmitter spurious emissions .....	39
5.3.3.1	Initial conditions .....	39
5.3.3.2	Procedure .....	39
5.3.4	Base Station maximum output power .....	39
5.3.4.1	Initial conditions .....	39
5.3.4.2	Procedure .....	40
5.3.5	Transmitter intermodulation .....	40
5.3.5.1	Initial conditions .....	40
5.3.5.2	Procedures .....	40
5.3.6	Receiver spurious emissions .....	41
5.3.6.1	Initial conditions .....	41
5.3.6.2	Procedure .....	41
5.3.7	Blocking characteristics .....	41
5.3.7.1	Initial conditions .....	41
5.3.7.2	Procedure .....	42
5.3.8	Receiver intermodulation characteristics .....	42
5.3.8.1	Initial conditions .....	42
5.3.8.2	Procedures .....	42
5.3.9	Adjacent Channel Selectivity (ACS) and narrow-band blocking .....	42
5.3.9.1	Initial conditions .....	42
5.3.9.2	Procedure for Adjacent Channel Selectivity .....	43
5.3.9.3	Procedure for narrow-band blocking .....	43
5.3.10	Home BS output power for adjacent channel protection .....	43
5.3.10.1	Initial conditions .....	43
5.3.10.2	Procedure .....	43
5.3.11	Home BS output power for adjacent E-UTRA channel protection .....	44
5.3.11.1	Initial conditions .....	44
5.3.11.2	Procedure .....	44
<b>Annex A (normative):</b>	<b>HS Requirements and conformance Test specifications Table (HS-RTT) .....</b>	<b>46</b>
<b>Annex B (normative):</b>	<b>Base Station configurations .....</b>	<b>48</b>
B.1	Receiver diversity .....	48

B.2	Duplexers .....	48
B.3	Power supply options .....	48
B.4	Ancillary RF amplifiers.....	49
B.5	BS using antenna arrays .....	49
B.5.1	Receiver tests.....	50
B.5.2	Transmitter tests .....	50
B.6	Transmit diversity and MIMO transmission .....	50
B.7	BS with integrated Iuant BS modem.....	51
<b>Annex C (informative):</b>	<b>Environmental profile specification .....</b>	<b>52</b>
<b>Annex D (informative):</b>	<b>The EN title in the official languages .....</b>	<b>53</b>
<b>Annex E (informative):</b>	<b>Bibliography.....</b>	<b>54</b>
History .....		55

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST EN 301 908-14 V5.2.1:2011](https://standards.iteh.ai/catalog/standards/sist/efa1c4f8-98a0-4f78-b521-55eef57fa365/sist-en-301-908-14-v5-2-1-2011)

<https://standards.iteh.ai/catalog/standards/sist/efa1c4f8-98a0-4f78-b521-55eef57fa365/sist-en-301-908-14-v5-2-1-2011>

---

## Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

---

## Foreword

This Harmonized European Standard (EN) has been produced by ETSI Technical Committee Mobile Standards Group (MSG).

The present document has been produced by ETSI in response to mandate M/284 from the European Commission issued under Council Directive 98/34/EC [i.1] (as amended) laying down a procedure for the provision of information in the field of technical standards and regulations.

The title and reference to the present document are intended to be included in the publication in the Official Journal of the European Union of titles and references of Harmonized Standard under the Directive 1999/5/EC [i.2].

See article 5.1 of Directive 1999/5/EC [i.2] for information on presumption of conformity and Harmonised Standards or parts thereof the references of which have been published in the Official Journal of the European Union.

The requirements relevant to Directive 1999/5/EC [i.2] are summarised in annex A.

The present document is part 14 of a multi-part deliverable covering the essential requirements under article 3.2 of Directive 1999/5/EC [i.2] (R&TTE Directive) for Base Stations (BS), Repeaters and User Equipment (UE) for IMT cellular networks, as identified below:

- Part 1: "Introduction and common requirements";
- Part 2: "CDMA Direct Spread (UTRA FDD) User Equipment (UE)";
- Part 3: "CDMA Direct Spread (UTRA FDD) Base Stations (BS)";
- Part 4: "CDMA Multi-Carrier (cdma2000) User Equipment (UE)";
- Part 5: "CDMA Multi-Carrier (cdma2000) Base Stations (BS)";
- Part 6: "CDMA TDD (UTRA TDD) User Equipment (UE)";
- Part 7: "CDMA TDD (UTRA TDD) Base Stations (BS)";
- Part 8: "Harmonized EN for IMT-2000, TDMA Single-Carrier (UWC 136) (UE) covering essential requirements of article 3.2 of the R&TTE Directive";
- Part 9: "Harmonized EN for IMT-2000, TDMA Single-Carrier (UWC 136) (BS) covering essential requirements of article 3.2 of the R&TTE Directive";
- Part 10: "Harmonized EN for IMT-2000, FDMA/TDMA (DECT) covering essential requirements of article 3.2 of the R&TTE Directive";
- Part 11: "CDMA Direct Spread (UTRA FDD) (Repeaters)";
- Part 12: "Harmonized EN for IMT-2000, CDMA Multi-Carrier (cdma2000) (Repeaters) covering the essential requirements of article 3.2 of the R&TTE Directive";
- Part 13: "Evolved Universal Terrestrial Radio Access (E-UTRA) User Equipment (UE)";



- Part 14:** "Evolved Universal Terrestrial Radio Access (E-UTRA) Base Stations (BS)";
- Part 15: "Evolved Universal Terrestrial Radio Access (E-UTRA) (FDD Repeaters)";
- Part 16: "Harmonized EN for IMT-2000, Evolved CDMA Multi-Carrier Ultra Mobile Broadband (UMB) (UE) covering the essential requirements of article 3.2 of the R&TTE Directive";
- Part 17: "Harmonized EN for IMT-2000, Evolved CDMA Multi-Carrier Ultra Mobile Broadband (UMB) (BS) covering the essential requirements of article 3.2 of the R&TTE Directive";
- Part 18: "E-UTRA, UTRA and GSM/EDGE Multi-Standard Radio (MSR) Base Station (BS)";
- Part 19: "OFDMA TDD WMAN (Mobile WiMAX) TDD User Equipment (UE)";
- Part 20: "OFDMA TDD WMAN (Mobile WiMAX) TDD Base Station (BS)";
- Part 21: "OFDMA TDD WMAN (Mobile WiMAX) FDD User Equipment (UE)";
- Part 22: "OFDMA TDD WMAN (Mobile WiMAX) FDD Base Stations (BS)".

<b>National transposition dates</b>	
Date of adoption of this EN:	12 April 2011
Date of latest announcement of this EN (doa):	31 July 2011
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	31 January 2012
Date of withdrawal of any conflicting National Standard (dow):	31 January 2013

SIST EN 301 908-14 V5.2.1:2011

## Introduction

<https://standards.iteh.ai/catalog/standards/sist/efa1c4f8-98a0-4f78-b521-55eef57fa365/sist-en-301-908-14-v5-2-1-2011>

The present document is part of a set of standards developed by ETSI and is designed to fit in a modular structure to cover all radio and telecommunications terminal equipment within the scope of the R&TTE Directive [i.2]. The modular structure is shown in EG 201 399 [i.3].

# 1 Scope

The present document applies to the following radio equipment type:

- Base Station for Evolved Universal Terrestrial Radio Access (E-UTRA).

This radio equipment type is capable of operating in all or any part of the operating bands given in table 1-1.

**Table 1-1: E-UTRA Base Station operating bands**

E-UTRA band	Direction of transmission	E-UTRA Base Station operating bands
1	Transmit	2 110 MHz to 2 170 MHz
	Receive	1 920 MHz to 1 980 MHz
3	Transmit	1 805 MHz to 1 880 MHz
	Receive	1 710 MHz to 1 785 MHz
7	Transmit	2 620 MHz to 2 690 MHz
	Receive	2 500 MHz to 2 570 MHz
8	Transmit	925 MHz to 960 MHz
	Receive	880 MHz to 915 MHz
20	Transmit	791 MHz to 821 MHz
	Receive	832 MHz to 862 MHz
33	Transmit and Receive	1 900 MHz to 1 920 MHz
34	Transmit and Receive	2 010 MHz to 2 025 MHz
38	Transmit and Receive	2 570 MHz to 2 620 MHz

The present document covers requirements for E-UTRA Base Stations for Release 8 and 9.

The present document is intended to cover the provisions of Directive 1999/5/EC [i.2] (R&TTE Directive), article 3.2, which states that "..... radio equipment shall be so constructed that it effectively uses the spectrum allocated to terrestrial/space radio communications and orbital resources so as to avoid harmful interference".

In addition to the present document, other ENs that specify technical requirements in respect of essential requirements under other parts of article 3 of the R&TTE Directive [i.2] may apply to equipment within the scope of the present document.

NOTE: A list of such ENs is included on the web site <http://www.newapproach.org>.

## 2 References

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the reference document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication ETSI cannot guarantee their long term validity.

### 2.1 Normative references

The following referenced documents are necessary for the application of the present document.

- [1] ETSI EN 301 908-1 (V5.2.1): "IMT cellular networks; Harmonized EN covering the essential requirements of article 3.2 of the R&TTE Directive; Part 1: Introduction and common requirements".
- [2] ETSI TS 136 141 (V9.6.0): "LTE; Evolved Universal Terrestrial Radio Access (E-UTRA); Base Station (BS) conformance testing (3GPP TS 36.141 version 9.6.0 Release 9)".

- [3] Void.
- [4] ITU-R Recommendation SM.329-10 (2003): "Unwanted emissions in the spurious domain".
- [5] ETSI TS 125 104 (V9.6.0): "Universal Mobile Telecommunications System (UMTS); Base Station (BS) radio transmission and reception (FDD) (3GPP TS 25.104 version 9.6.0 Release 9)".
- [6] ETSI TS 125 105 (V9.2.0): "Universal Mobile Telecommunications System (UMTS); Base Station (BS) radio transmission and reception (TDD) (3GPP TS 25.105 version 9.2.0 Release 9)".
- [7] ETSI TS 136 104 (V9.6.0): "LTE; Evolved Universal Terrestrial Radio Access (E-UTRA); Base Station (BS) radio transmission and reception (3GPP TS 36.104 version 9.6.0 Release 9)".
- [8] ETSI TS 125 141 (V9.6.0): "Universal Mobile Telecommunications System (UMTS); Base Station (BS) conformance testing (FDD) (3GPP TS 25.141 version 9.6.0 Release 9)".
- [9] ETSI EN 301 908-18 (V5.2.1): "IMT cellular networks; Harmonized EN covering the essential requirements of article 3.2 of the R&TTE Directive; Part 18: E-UTRA, UTRA and GSM/EDGE Multi-Standard Radio (MSR) Base Station (BS)".
- [10] ETSI TS 136 211 (V9.1.0): "LTE; Evolved Universal Terrestrial Radio Access (E-UTRA); Physical channels and modulation (3GPP TS 36.211 version 9.1.0 Release 9)".

## 2.2 Informative references

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] Directive 98/34/EC of the European Parliament and of the Council of 22 June 1998 laying down a procedure for the provision of information in the field of technical standards and regulations.
- [i.2] Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity (R&TTE Directive).
- [i.3] ETSI EG 201 399: "Electromagnetic compatibility and Radio spectrum Matters (ERM); A guide to the production of Harmonized Standards for application under the R&TTE Directive".
- [i.4] ETSI TR 102 215 (V1.3.1): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Recommended approach, and possible limits for measurement uncertainty for the measurement of radiated electromagnetic fields above 1 GHz".
- [i.5] ETSI TR 100 028 (all parts) (V1.4.1): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics".

---

## 3 Definitions, symbols and abbreviations

### 3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

**Base Station class:** wide area Base Station, local Area Base Station or home Base Station, as declared by the manufacturer

**carrier:** modulated waveform conveying the E-UTRA or UTRA (WCDMA) physical channels

**channel bandwidth:** RF bandwidth supporting a single E-UTRA RF carrier with the transmission bandwidth configured in the uplink or downlink of a cell

NOTE: The channel bandwidth is measured in MHz and is used as a reference for transmitter and receiver RF requirements.

**channel edge:** lowest and highest frequency of the E-UTRA carrier, separated by the channel bandwidth

**downlink operating band:** part of the operating band designated for downlink (BS transmit)

**Downlink Reference Symbol (DL RS) power:** resource element power of Downlink Reference Symbol

**home Base Station:** Base Stations characterized by requirements derived from femtocell scenarios with a BS to UE minimum coupling loss equal to 45 dB

**local area Base Station:** Base Stations characterized by requirements derived from picocell scenarios with a BS to UE minimum coupling loss equal to 45 dB

**maximum output power:** mean power level per carrier of the Base Station measured at the antenna connector in a specified reference condition

**maximum throughput:** maximum achievable throughput for a reference measurement channel

**mean power:** when applied to E-UTRA transmission this is the power measured in the channel bandwidth of the carrier where the period of measurement shall be at least one subframe (1 ms), unless otherwise stated

**multi-carrier transmission configuration:** set of one or more contiguous carriers that a BS is able to transmit simultaneously according to the manufacturer's specification

**operating band:** frequency range (paired or unpaired) that is defined with a specific set of technical requirements, in which E-UTRA operates

NOTE: The operating band(s) for an E-UTRA BS is declared by the manufacturer according to the designations in table 1-1. Operating bands for E-UTRA are designated with Arabic numerals, while the corresponding operating bands for UTRA are designated with Roman numerals.

**output power:** mean power of one carrier of the Base Station, delivered to a load with resistance equal to the nominal load impedance of the transmitter

**rated output power:** rated output power of the Base Station is the mean power level per carrier that the manufacturer has declared to be available at the antenna connector

**resource block:** a physical resource consisting of a number of symbols in the time domain and a number of consecutive subcarriers spanning 180 kHz in the frequency domain

**throughput:** number of payload bits successfully received per second for a reference measurement channel in a specified reference condition

**transmission bandwidth:** bandwidth of an instantaneous transmission from a UE or BS, measured in Resource Block units

**transmission bandwidth configuration:** highest transmission bandwidth allowed for uplink or downlink in a given channel bandwidth, measured in Resource Block units

**transmitter OFF period:** time period during which the BS transmitter is not allowed to transmit

**transmitter ON period:** time period during which the BS transmitter is transmitting data and/or reference symbols, i.e. data subframes or DwPTS

**transmitter transient period:** time period during which the transmitter is changing from the OFF period to the ON period or vice versa

**uplink operating band:** part of the operating band designated for uplink (BS receive)

**wide area Base Station:** Base Stations characterized by requirements derived from Macro Cell scenarios with a BS to UE minimum coupling loss equal to 70 dB

NOTE: This Base Station class has the same requirements as the general purpose Base Station in 3GPP Release 8.

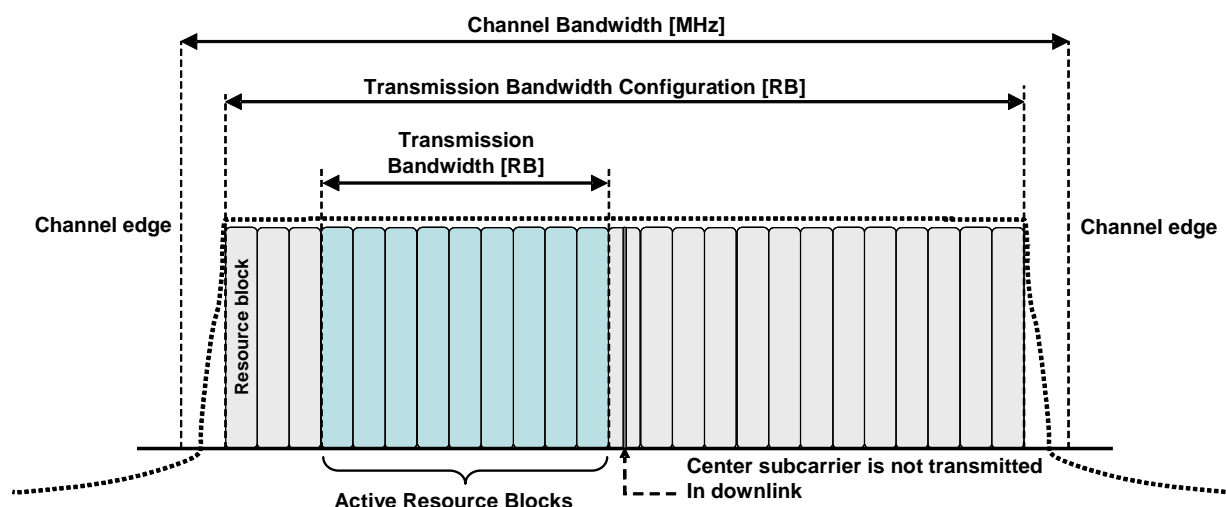


Figure 3.1-1: Definition of Channel Bandwidth and Transmission Bandwidth Configuration for one E-UTRA carrier

iteh STANDARD PREVIEW  
(standards.iteh.ai)

## 3.2 Symbols

SIST EN 301 908-14 V5.2.1:2011

For the purposes of the present document, the following symbols apply:

$BW_{\text{Channel}}$	Channel bandwidth
$BW_{\text{Config}}$	Transmission bandwidth configuration, expressed in MHz, where $BW_{\text{Config}} = N_{\text{RB}} \times 180 \text{ kHz}$ in the uplink and $BW_{\text{Config}} = 15 \text{ kHz} + N_{\text{RB}} \times 180 \text{ kHz}$ in the downlink
$CPICH \hat{E}_c$	Common Pilot Channel code power (on the adjacent channel)
$CRS \hat{E}_c$	Reference Signal received power per resource element
$f$	Frequency
$\Delta f$	Separation between the channel edge frequency and the nominal -3 dB point of the measuring filter closest to the carrier frequency
$\Delta f_{\text{max}}$	The largest value of $\Delta f$ used for defining the requirement
$F_C$	Carrier centre frequency
$F_{\text{filter}}$	Filter centre frequency
$f_{\text{interferer}}$	Centre frequency of the interfering signal
$f_{\text{offset}}$	Separation between the channel edge frequency and the centre of the measuring filter
$f_{\text{offset}_{\text{max}}}$	The maximum value of $f_{\text{offset}}$ used for defining the requirement
$F_{\text{DL}_{\text{low}}}$	The lowest frequency of the downlink operating band
$F_{\text{DL}_{\text{high}}}$	The highest frequency of the downlink operating band
$F_{\text{UL}_{\text{low}}}$	The lowest frequency of the uplink operating band (see table 1-1)
$F_{\text{UL}_{\text{high}}}$	The highest frequency of the uplink operating band (see table 1-1)
$I_{\text{oh}}$	Total received power density excluding own Home BS signal
$I_{\text{uant}}$	E-Node B internal logical interface between the implementation specific O&M function and the RET antennas and TMAs control unit function of the E-Node B
$N_{\text{RB}}$	Transmission bandwidth configuration, expressed in units of Resource Blocks
$N_{\text{RB}}^{\text{DL}}$	The number of downlink resource blocks in the downlink
$N_{\text{sc}}^{\text{RB}}$	The number of subcarriers in a resource block, $N_{\text{sc}}^{\text{RB}} = 12$

$p$	Antenna port number
$(P_i)$	Power of the signal at antenna connector $i$
$(P_s)$	Sum of the power for all antenna connectors
$P_{10\text{MHz}}$	Maximum output Power in 10 MHz
$P_{\text{EM},N}$	Declared emission level for channel N
$P_{\text{max}}$	Maximum output power
$P_{\text{REFSENS}}$	Reference sensitivity power level

### 3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ACLR	Adjacent Channel Leakage Ratio
ACS	Adjacent Channel Selectivity
AWGN	Additive White Gaussian Noise
B	Bottom RF channel

NOTE: For testing purposes.

BS	Base Station
BTS	Base Transceiver Station

NOTE: For GSM.

BW	Bandwidth
CW	Continuous Wave
DC	Direct Current
DwPTS	Downlink part of the special subframe

NOTE: For TDD operation.

DTT	Digital Terrestrial Television
EARFCN	E-UTRA Absolute Radio Frequency Channel Number
E-TM	E-UTRA Test Model
EUT	Equipment Under Test
E-UTRA	Evolved UMTS Terrestrial Radio Access
ERM	EMC and Radio Spectrum Matters
FDD	Frequency Division Duplex
FRC	Fixed Reference Channel
ITU-R	International Telecommunication Union - Radiocommunication
M	Middle RF channel

NOTE: For testing purposes.

LTE	Long Term Evolution
-----	---------------------

NOTE: Also known as E-UTRA.

MIMO	Multiple Input Multiple Output
MS	Mobile Station

NOTE: For GSM.

MSG	Mobile Standards Group
MSR	Multi-Standard Radio
RB	Resource Block
RF	Radio Frequency
RMS	Root Mean Square
RRC	Root Raised Cosine
RX	Receive

T Top RF channel

NOTE: For testing purposes.

TFES Task Force for European Standards for IMT  
 TDD Time Division Duplex  
 TX Transmit  
 UE User Equipment  
 UMTS Universal Mobile Telecommunications System  
 UTRA UMTS Terrestrial Radio Access

## 4 Technical requirements specifications

### 4.1 Environmental profile

The technical requirements of the present document apply under the environmental profile for operation of the equipment, which shall be declared by the supplier. The equipment shall comply with all the technical requirements of the present document at all times when operating within the boundary limits of the declared operational environmental profile.

For guidance on how a supplier can declare the environmental profile, see annex C.

### 4.2 Conformance requirements

The requirements in the present document are based on the assumption that the operating band (see table 1-1) is shared between systems of the IMT-2000 family (for band 3 and 8 also GSM) or systems having compatible characteristics.

#### 4.2.1 Introduction

SIST EN 301 908-14 V5.2.1:2011

<https://standards.iteh.ai/catalog/standards/sist/efa1c4f8-98a0-4f78-b521-55c057a339/sist-en-301-908-14-v5.2.1-2011>

To meet the essential requirement under article 3.2 of Directive 1999/5/EC [i.2] (R&TTE Directive) for IMT Base Stations (BS), seven essential parameters in addition to those in EN 301 908-1 [1] have been identified. Table 4.2.1-1 provides a cross reference between these seven essential parameters and the corresponding eleven technical requirements for equipment within the scope of the present document.

**Table 4.2.1-1: Cross references**

Essential parameter	Corresponding technical requirements
Spectrum emissions mask	4.2.2 Operating band unwanted emissions
	4.2.3 Adjacent Channel Leakage power Ratio (ACLR)
	4.2.11 Home BS output power for adjacent UTRA channel protection
	4.2.12 Home BS output power for adjacent E-UTRA channel protection
Conducted spurious emissions from the transmitter antenna connector	4.2.4 Transmitter spurious emissions
Accuracy of maximum output power	4.2.5 Base Station maximum output power
Intermodulation attenuation of the transmitter	4.2.6 Transmit intermodulation
Conducted spurious emissions from the receiver antenna connector	4.2.7 Receiver spurious emissions
Impact of interference on receiver performance	4.2.8 Blocking characteristics
	4.2.9 Receiver intermodulation characteristics
Receiver adjacent channel selectivity	4.2.10 Adjacent Channel Selectivity (ACS) and narrow-band blocking