



SLOVENSKI STANDARD
SIST EN 301 842-4 V1.2.2:2011
01-februar-2011

Radijska oprema za VHF digitalne povezave zrak-tla, 4. način - Tehnične karakteristike in merilne metode za talno opremo - 4. del: Funkcije za sistem točka-točka

VHF air-ground Digital Link (VDL) Mode 4 radio equipment - Technical characteristics and methods of measurement for ground-based equipment - Part 4: Point-to-point functions

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 301 842-4 V1.2.2:2011](https://standards.iteh.ai/catalog/standards/sist/773f22a2-ea7a-446e-a659-f0368f3afe95/sist-en-301-842-4-v1-2-2-2011)
<https://standards.iteh.ai/catalog/standards/sist/773f22a2-ea7a-446e-a659-f0368f3afe95/sist-en-301-842-4-v1-2-2-2011>

Ta slovenski standard je istoveten z: EN 301 842-4 Version 1.2.2

ICS:

| | | |
|-----------|--|---|
| 33.060.99 | Druga oprema za radijske komunikacije | Other equipment for radiocommunications |
| 49.090 | Oprema in instrumenti v zračnih in vesoljskih plovilih | On-board equipment and instruments |

SIST EN 301 842-4 V1.2.2:2011 **en**

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 301 842-4 V1.2.2:2011](https://standards.iteh.ai/catalog/standards/sist/773f22a2-ca7a-446e-a659-f0368f3afe95/sist-en-301-842-4-v1-2-2-2011)

<https://standards.iteh.ai/catalog/standards/sist/773f22a2-ca7a-446e-a659-f0368f3afe95/sist-en-301-842-4-v1-2-2-2011>

ETSI EN 301 842-4 V1.2.2 (2010-12)

European Standard (Telecommunications series)

VHF air-ground Digital Link (VDL) Mode 4 radio equipment; Technical characteristics and methods of measurement for ground-based equipment; Part 4: Point-to-point functions

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 301 842-4 V1.2.2:2011](https://standards.iteh.ai/catalog/standards/sist/773f22a2-ea7a-446e-a659-f0368f3afe95/sist-en-301-842-4-v1-2-2-2011)

<https://standards.iteh.ai/catalog/standards/sist/773f22a2-ea7a-446e-a659-f0368f3afe95/sist-en-301-842-4-v1-2-2-2011>



Reference

REN/AERO-00006-4

Keywords

aeronautical, digital, radio, testing, VHF

ETSI650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88iTech STANDARD PREVIEW
(standards.iteh.ai)SIST EN 301 842-4 V1.2.2:2011<https://standards.iteh.ai/catalog/standards/sist/773f22a2-ea7a-446e-a659-f0368f3afe92/etsi-en-301-842-4-v1-2-2-2011>
Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

http://portal.etsi.org/chaicor/ETSI_support.asp**Copyright Notification**

No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2010.
All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™**, **TIPHON™**, the TIPHON logo and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.

3GPP™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

LTE™ is a Trade Mark of ETSI currently being registered

for the benefit of its Members and of the 3GPP Organizational Partners.

GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Contents

| | |
|---|----|
| Intellectual Property Rights | 6 |
| Foreword..... | 6 |
| Introduction | 7 |
| 1 Scope | 8 |
| 2 References | 9 |
| 2.1 Normative references | 9 |
| 2.2 Informative references..... | 10 |
| 3 Definitions and abbreviations..... | 10 |
| 3.1 Definitions..... | 10 |
| 3.1.1 Basic reference model definitions..... | 10 |
| 3.1.2 Service conventions definitions | 10 |
| 3.1.3 General definitions..... | 10 |
| 3.2 Abbreviations | 11 |
| 4 General description of VDL Mode 4 ground station point-to-point services..... | 12 |
| 4.1 General | 12 |
| 4.2 Data Link Service (DLS) and Link Management Entity (LME) | 12 |
| 4.2.1 General..... | 12 |
| 4.2.2 DLS timers..... | 16 |
| 4.2.3 DLS counters | 16 |
| 4.2.4 Toggle bit (T)..... | 16 |
| 4.2.5 State variables (T_r and T_r) | 16 |
| 4.2.6 Initialize Bit (IB)..... | 17 |
| 4.2.7 More bit (M) | 17 |
| 4.2.8 Priority (pr) | 17 |
| 4.2.9 Message fragmentation and concatenation | 17 |
| 4.2.10 DLS procedures | 17 |
| 4.2.10.1 Selection of DLS procedures..... | 17 |
| 4.2.10.2 Short transmission procedures | 18 |
| 4.2.10.3 Long transmission procedures..... | 18 |
| 4.2.11 Linking transmissions | 20 |
| 4.2.11.1 Types of linking | 20 |
| 4.2.11.2 Combined RTS / DATA DLPDUs..... | 20 |
| 4.2.11.3 Combined DATA / ACK DLPDUs..... | 20 |
| 4.2.11.4 Combined RTS / ACK DLPDUs | 20 |
| 4.2.11.5 Combined CTS / ACK DLPDUs | 20 |
| 4.2.12 Ground-air link management | 20 |
| 4.2.13 Air-air link management..... | 21 |
| 4.3 Additional VSS Services | 21 |
| 5 Minimum performance specification under standard test conditions..... | 21 |
| 5.1 DLS Sublayer | 21 |
| 5.1.1 General..... | 21 |
| 5.1.1.1 Services | 21 |
| 5.1.1.2 Data transfer | 22 |
| 5.1.1.3 DATA DLPDU duplicate suppression and sequencing | 22 |
| 5.1.1.4 Error detection..... | 22 |
| 5.1.1.5 Station identification | 22 |
| 5.1.1.6 Broadcast addressing..... | 22 |
| 5.1.1.7 DLS Priority..... | 23 |
| 5.1.1.8 DLS Link control DLPDUs | 23 |
| 5.1.2 DLS protocol specification | 23 |
| 5.1.2.1 State Variables | 23 |
| 5.1.2.2 DLS burst formats..... | 23 |
| 5.1.3 DLS system parameters | 27 |

| | | |
|----------|---|----|
| 5.1.4 | DLS procedures | 28 |
| 5.1.4.1 | Setting of re-transmission parameter | 28 |
| 5.1.4.2 | Selection of user data packet for transmission | 29 |
| 5.1.4.3 | Selection of transmission procedures | 30 |
| 5.1.4.4 | Short transmission procedures | 31 |
| 5.1.4.5 | Long transmission procedures | 32 |
| 5.1.4.6 | No link with sender | 34 |
| 5.1.4.7 | User data packet reception | 35 |
| 5.1.4.8 | Receipt of ACK DLPDU | 35 |
| 5.1.4.9 | Link reset | 36 |
| 5.1.4.10 | Linking DLS DLPDU transmissions | 36 |
| 5.1.4.11 | CTRL DLPDU | 37 |
| 5.2 | Link management entity sublayer | 37 |
| 5.2.1 | Services | 37 |
| 5.2.1.1 | General | 37 |
| 5.2.1.2 | Link provision | 38 |
| 5.2.1.3 | Link change notifications | 38 |
| 5.2.1.4 | CTRL DLPDU | 38 |
| 5.2.1.5 | Broadcast link management burst | 39 |
| 5.2.2 | Control (CTRL) parameter formats | 39 |
| 5.2.2.1 | Encoding | 39 |
| 5.2.2.2 | General purpose information parameters | 39 |
| 5.2.2.3 | Mobile-initiated information parameters | 43 |
| 5.2.2.4 | Ground-initiated modification parameters | 44 |
| 5.2.2.5 | Ground-initiated information parameters | 47 |
| 5.2.3 | LME timers and parameters | 49 |
| 5.2.3.1 | General | 49 |
| 5.2.3.2 | Timer TL1 (maximum link overlap time) | 50 |
| 5.2.3.3 | Parameters TL2 (link initialization time) | 50 |
| 5.2.3.4 | Timer TL4 (leave generation latency) | 50 |
| 5.2.4 | CTRL DLPDU types and procedures | 51 |
| 5.2.5 | CTRL transmission procedures | 54 |
| 5.2.5.1 | Link connectivity procedures | 54 |
| 5.2.5.2 | Ground Station Identification | 54 |
| 5.2.5.3 | Link establishment | 54 |
| 5.2.5.4 | Mobile-initiated handoff | 55 |
| 5.2.5.5 | Mobile-requested ground-initiated handoff | 55 |
| 5.2.5.6 | Ground-initiated handoff | 56 |
| 5.2.5.7 | Ground-requested mobile-initiated handoff | 56 |
| 5.2.5.8 | Ground-requested broadcast handoff | 56 |
| 5.2.5.9 | Ground-commanded autotune | 57 |
| 5.2.6 | VDL Mode 4 Mobile Subnetwork Dependent Convergence Function (SNDCF) | 57 |
| 5.2.6.1 | Frame Mode SNDCF | 57 |
| 5.3 | Additional VSS Requirements | 57 |
| 5.3.1 | Additional VSS quality of service parameters | 57 |
| 5.3.1.1 | Parameter Q5 (VSS retransmission parameters) | 57 |
| 5.3.2 | Unicast request protocol specification | 58 |
| 5.3.2.1 | Unicast request parameters | 58 |
| 5.3.2.2 | Unicast request transmission procedures | 59 |
| 5.3.3 | Information transfer request protocol specification | 59 |
| 5.3.3.1 | Information transfer request parameters | 59 |
| 5.3.3.2 | Information transfer request transmission procedures | 61 |
| 5.3.3.3 | Information transfer request acknowledgement procedures | 61 |
| 5.3.4 | Retransmission procedures | 61 |
| 6 | General design requirements | 62 |
| 7 | Protocol test procedures | 62 |
| 7.1 | General | 62 |
| 7.2 | Required test rig | 62 |
| 7.3 | Protocol test-suite description methodology | 63 |
| 7.4 | Detailed protocol test procedures | 63 |

| | | |
|-------------------------------|---|------------|
| 7.4.1 | Test-suite overview | 63 |
| 7.4.2 | Declarations | 65 |
| 7.4.3 | Constraints | 65 |
| 7.4.3.1 | Abbreviations | 65 |
| 7.4.3.1.1 | Subfield mnemonics | 65 |
| 7.4.3.1.2 | Special characters used in the subfield definitions | 66 |
| 7.4.3.1.3 | Station addresses and positions | 66 |
| 7.4.3.1.4 | VDL bursts | 67 |
| 7.4.3.2 | Test cases | 97 |
| 7.4.3.2.1 | Test case macros | 98 |
| 7.4.3.2.2 | Test case descriptions | 100 |
| Annex A (informative): | Cross reference matrix | 155 |
| Annex B (informative): | Bibliography | 164 |
| History | | 169 |

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST EN 301 842-4 V1.2.2:2011](https://standards.iteh.ai/catalog/standards/sist/773f22a2-ea7a-446e-a659-f0368f3afe95/sist-en-301-842-4-v1-2-2-2011)

<https://standards.iteh.ai/catalog/standards/sist/773f22a2-ea7a-446e-a659-f0368f3afe95/sist-en-301-842-4-v1-2-2-2011>

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (Telecommunications series) has been produced by ETSI Technical Committee Aeronautics (AERO).

The present document is part 4 of a multi-part deliverable covering the VHF air-ground Digital Link (VDL) Mode 4 radio equipment; Technical characteristics and methods of measurement for ground-based equipment, as identified below:

- Part 1: "EN for ground equipment";
- Part 2: "General description and data link layer";
- Part 3: "Additional broadcast aspects";
- Part 4: "Point-to-point functions";**
- Part 5: "Harmonized EN covering the essential requirements of article 3.2 of the R&TTE Directive".

The present document is accompanied by an equivalent airborne standard, EN 302 842 [7] Parts 1 to 4, covering the VHF air-ground Digital Link (VDL) Mode 4 radio equipment; Technical characteristics and methods of measurement for airborne equipment.

| National transposition dates | |
|--|-------------------|
| Date of latest announcement of this EN (doa): | 31 March 2011 |
| Date of latest publication of new National Standard or endorsement of this EN (dop/e): | 30 September 2011 |
| Date of withdrawal of any conflicting National Standard (dow): | 30 September 2011 |

Introduction

The present document is part of a multi-part deliverable developed by ETSI and is designed to fit in a modular structure to cover all radio and telecommunications terminal equipment within the scope of the R&TTE Directive [i.1]. The modular structure is shown in EG 201 399 [i.2].

The present document states the technical specifications for Very High Frequency (VHF) Digital Link (VDL) Mode 4 ground-based radio transmitters, transceivers and receivers for air-ground communications operating in the VHF band, using Gaussian-filtered Frequency Shift Keying (GFSK) Modulation with 25 kHz channel spacing and capable of tuning to any of the 25 kHz channels from 118,000 MHz to 136,975 MHz as defined in ICAO VHF Digital Link (VDL) Standards and Recommended Practices (SARPs) [8].

The present document may be used to produce tests for the assessment of the performance of the equipment. The performance of the equipment submitted for type testing should be representative of the performance of the corresponding production model.

The present document has been written on the assumption that:

- the type test measurements will be performed only once, in an accredited test laboratory and the measurements accepted by the various authorities in order to grant type approval;
- if equipment available on the market is required to be checked it will be tested in accordance with the methods of measurement specified in the present document or a documented alternative approved by the certifying authority;
- equipment comply with EN 301 489-22 [2], EN 301 842-1 [4] and EN 301 842-2 [5].

ITEH STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 301 842-4 V1.2.2:2011](https://standards.iteh.ai/catalog/standards/sist/773f22a2-ca7a-446e-a659-f0368f3afe95/sist-en-301-842-4-v1-2-2-2011)

<https://standards.iteh.ai/catalog/standards/sist/773f22a2-ca7a-446e-a659-f0368f3afe95/sist-en-301-842-4-v1-2-2-2011>

1 Scope

The present document applies to the following radio equipment types:

- 1) Very High Frequency (VHF) Digital Link (VDL) Mode 4 ground-based radio transmitters and receivers for air-ground communications operating in the VHF band, using Gaussian-filtered Frequency Shift Keying (GFSK) Modulation with 25 kHz channel spacing and capable of tuning to any of the 25 kHz channels from 118,000 MHz to 136,975 MHz as defined in ICAO VHF Digital Link (VDL) Standards and Recommended Practices (SARPs) [8].

The present document provides part 4 of the technical specifications.

The present document is designed to ensure that equipment certified to it will be compatible with the relevant ICAO VHF Digital Link (VDL) Standards and Recommended Practices (SARPs) [8] and VDL Mode 4 Technical Manual (TM) [1].

Manufacturers should note that in future the tuning range for the ground transceivers may also cover any 25 kHz channel from 108,000 MHz to 117,975 MHz.

The scope of the present document is limited to ground stations. The equivalent specification for airborne stations is EN 302 842 [7].

A description of the scope of the VDL Mode 4 system is provided in part 2 of these technical specifications (see EN 301 842-2 [5], clause 1).

EN 301 842-1 [4] deals with tests of the physical layer, EN 301 842-2 [5] deals with core link layer functionality and EN 301 842-3 [6] with additional broadcast functionality. The present document deals with tests of the datalink service (DLS) layer and the link layer sufficient to support point-to-point functionality. Note that, as described in EN 301 842-2 [5], a system supporting point-to-point functionality is required to conform to EN 301 489-22 [2], EN 301 842-1 [4], EN 301 842-2 [5] and the specification in the present document.

The present document is organized as follows:

- clause 2 provides references to relevant documents;
- clause 3 provides general definitions, abbreviations and symbols used;
- clause 4 describes the VDL Mode 4 ground station point-to-point functions;
- clause 5 provides performance specifications for the VDL Mode 4 ground station;
- clause 6 provides general design requirements;
- clause 7 provides protocol tests for the point-to-point functions of the system;
- annex A provides a detailed cross-reference to the relevant requirements contained in [1];
- annex B provides a Bibliography;
- a document history.

Note that the system can support a very wide range of functions. It is not practical to provide specific tests for all aspects of functionality. The approach used is to provide detailed tests for the core point-to-point functionality and to provide tests of those remaining requirements which, if wrongly implemented, could cause a deterioration in the service offered by other VDL Mode 4 stations.

Mandating and Recommendation Phrases

- a) "Shall":
- the use of the word "Shall" indicates a mandated criterion; i.e. compliance with the particular procedure or specification is mandatory and no alternative may be applied.
- b) "Should":
- the use of the word "Should" (and phrases such as "It is recommended that...", etc.) indicates that though the procedure or criterion is regarded as the preferred option, alternative procedures, specifications or criteria may be applied, provided that the manufacturer, installer or tester can provide information or data to adequately support and justify the alternative.

2 References

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the reference document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication ETSI cannot guarantee their long term validity.

2.1 Normative references

The following referenced documents are necessary for the application of the present document.

- [1] ICAO Doc 9816 AN/448 (First Edition 2004): "Manual on VHF Digital Link (VDL) Mode 4, Part 2: Detailed Technical Specifications".
<https://standards.iteh.ai/catalog/standards/sist/773f22a2-ca7a-446e-a659-f0368f3afe95/sist-en-301-842-4-v1-2-2-2011>
- [2] ETSI EN 301 489-22 (V1.3.1): "Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 22: Specific conditions for ground based VHF aeronautical mobile and fixed radio equipment".
- [3] ICAO Doc 9705/AN-956 (Edition 3.0 - 2002): "Manual of Technical Provisions for the Aeronautical Telecommunication Network (ATN)".
- [4] ETSI EN 301 842-1 (V1.3.2): "VHF air-ground Digital Link (VDL) Mode 4 radio equipment; Technical characteristics and methods of measurement for ground-based equipment; Part 1: EN for ground equipment".
- [5] ETSI EN 301 842-2 (V1.6.1): "VHF air-ground Digital Link (VDL) Mode 4 radio equipment; Technical characteristics and methods of measurement for ground-based equipment; Part 2: General description and data link layer".
- [6] ETSI EN 301 842-3 (V1.3.1): "VHF air-ground Digital Link (VDL) Mode 4 radio equipment; Technical characteristics and methods of measurement for ground-based equipment; Part 3: Additional broadcast aspects".
- [7] ETSI EN 302 842 (all parts): "VHF air-ground and air-air Digital Link (VDL) Mode 4 radio equipment; Technical characteristics and methods of measurement for aeronautical mobile (airborne) equipment".
- [8] ICAO Annex 10 to the Convention on International Civil Aviation: "Aeronautical Telecommunications, Volume III: Communication Systems, Part I: Digital Data Communication Systems, chapter 6".

2.2 Informative references

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity (R&TTE Directive).
- [i.2] ETSI EG 201 399: "Electromagnetic compatibility and Radio spectrum Matters (ERM); A guide to the production of Harmonized Standards for application under the R&TTE Directive".

3 Definitions and abbreviations

3.1 Definitions

3.1.1 Basic reference model definitions

See EN 301 842-2 [5], clause 3.1.1.

3.1.2 Service conventions definitions

See EN 301 842-2 [5], clause 3.1.2.

3.1.3 General definitions (standards.iteh.ai)

For the purposes of the present document, the terms and definitions given in EN 301 842-1 [4], clause 3.1.3, EN 301 842-2 [5], clause 3.1.3 and the following apply:

long transmission procedure: procedure that allows transfer of DATA packets in reserved slots, avoiding the loss rates and delays associated with random access

NOTE: This includes the ability to link sequences of DATA packets, providing continuous transfer in reserved slots.

More bit (M): bit that controls message fragmentation and concatenation

NOTE: It is set to zero to indicate the end of a message. It is set to 1 to indicate that it is part of a fragmented message and that there are more fragments to follow.

Network Setup Connection Orientated Protocol (NSCOP): protocol that enables a ground-air link between mobiles

priority (pr): priority of a message, or, in the case of an RTS, the priority of the requested data

short transmission procedure: procedure for the sending of a single data packet. It contains a reservation for a subsequent acknowledgement

Toggle bit (T): bit that allows detection and rejection of duplicate DLPDUs

NOTE: The T bit is alternately set to 1 and 0 on each successive DATA transmission, except for retransmissions.

Zero-Overhead Connection-Orientated Protocol (ZOCOP): protocol that enables an air-air link between mobiles

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

| | |
|--------|---|
| A/G | Air/Ground |
| ACK | ACKnowledgement (burst) |
| ADM | ADMInistration identifier |
| ADS-B | Automatic Dependent Surveillance-Broadcast |
| ARS | Administration Region Selector |
| ATN | Aeronautical Telecommunication Network |
| CPR | Compact Position Reporting |
| CRC | Cyclic Redundancy Code |
| CTRL | ConTRoL (DLPDU) |
| CTS | Clear To Send (burst) |
| DLE | Data Link Entity |
| DLPDU | Data Link Protocol Data Unit |
| DLS | Data Link Service |
| DM | Disconnected Mode (DLPDU) |
| FRMR | FRaMe Reject (DLPDU) |
| GFSK | Gaussian-filtered Frequency Shift Keying |
| GSC | Global Signalling Channel |
| GSIF | Ground Station Information Frame |
| hex | hexadecimal |
| IA-5 | International Alphabet 5 |
| IB | Initialize Bit |
| ICAO | International Civil Aviation Organization |
| ID | IDentity |
| INFO | INFORmation (DLPDU) |
| ISO | International Organization for Standardization |
| IS-SME | Intermediate System - System Management Entity |
| lg | length |
| LME | Link Management Entity |
| M | More bit |
| MAC | Media Access Control |
| MOPS | Minimum Operational Performance Specification |
| NACK | Negative ACKnowledgment |
| NETs | Network Entity Titles |
| NM | Nautical Mile |
| NSCOP | Network Setup Connection Orientated Protocol |
| pr | priority |
| PCO | Point of Control and Observation |
| R&TTE | Radio equipment and Telecommunications Terminal Equipment |
| RF | Radio Frequency |
| RTS | Request To Send (DLPDU) |
| SARPs | Standards And Recommended Practices |
| SNDCF | SubNetwork Dependant Convergence Function |
| SZOM | Start Zero Overhead Mode (DLPDU) |
| T | Toggle bit |
| UCTRL | Unacknowledged ConTRoL data broadcast (DLPDU) |
| UDATA | Unacknowledged DATA broadcast (DLPDU) |
| UINFO | Unacknowledged user INFORmation data broadcast (DLPDU) |
| VDL | VHF Digital Link |
| VHF | Very High Frequency |
| VME | VDL Management Entity |
| VSS | VDL Mode 4 Specific Services |
| ZOCOP | Zero-Overhead Connection-Orientated Protocol |

In the tables included in the present document to illustrate the format of bursts, the following order is implied:

- a) bit order in each burst subfield shall be indicated by subscript numbers. Bit 1 shall indicate the least significant bit; and
- b) bits shall be transmitted octet by octet, starting with the first octet in each table, and within each octet the rightmost bit (as shown in the tables) shall be transmitted first.

4 General description of VDL Mode 4 ground station point-to-point services

4.1 General

A description of VDL Mode 4 is provided in EN 301 842-2 [5]. This clause provides a description of the datalink layer and associated services of the VSS and LME required to support point-to-point communications.

The specifications in the present document provide air-to-ground and air-to-air point-to-point services based on the ICAO Technical Manual. Part 4 includes:

- Point-to-point data and control data transfer functions from the DLS.
- Point-to-point link control within the LME.

Note that the present document covers the establishment, termination and handover of links between ground stations. Decisions to establish, terminate or handover links between ground stations are local issues and beyond the scope of these specifications.

In most respects, the VDL Mode 4 ground station follows the provisions of the ICAO standards material for VDL Mode 4. Within the ICAO standard, there are some requirements which apply explicitly only to airborne stations. Requirements on airborne stations are covered in EN 302 842 [7] Parts 1 to 4.

The scope of the present document is for a ground station supporting point-to-point applications. Hence the ability to support broadcast communication is not included in the present document.

Note that, although certain protocols will not be used by the ground station, the ability to recognize the use by mobiles of these protocols and to respond in a consistent manner is a ground station requirement and is included in the present document.

4.2 Data Link Service (DLS) and Link Management Entity (LME)

4.2.1 General

The Data Link Service (DLS) provides a point-to-point protocol supporting both air-to-ground and air-to-air exchanges. For air-to-ground exchanges, connection management is handled by the LME, using a Negotiated Setup Connection-Orientated Protocol (NSCOP). For air-to-air exchanges, the DLS defines a ZOCOP protocol with link establishment and disestablishment controlled by timers, allowing rapid link negotiation between aircraft.

The specifications in the present document assume that VDL Mode 4 will be used with a network based on ATN protocols [3]. It should be noted that, in future, it could support other network protocols.

The DLS is a simple information exchange protocol which provides:

- a) Explicit acknowledgement of each DATA packet.
- b) Mechanisms to provide data transfer in reserved slots, avoiding loss rates and delays associated with random access. This includes the ability to link sequences of DATA packets, providing continuous transfer in reserved slots.

- c) Packet fragmentation, to allow long user data packets to be transferred across the link in fragments optimally matched to the link conditions.
- d) Duplicate detection and suppression via a simple toggle-bit mechanism.
- e) Explicit support for the 15 priority levels defined for the ATN, including the ability for high priority messages to be sent in the middle of a fragmented low priority message.

As illustrated in figure 4.1, the DLS:

- Provides services to external users in order to support point-to-point, multi-cast and broadcast communications.
- Provides services to the LME to support link management.
- Supports services between peer DLSs.
- Uses the services of the VSS in order to send and receive messages.

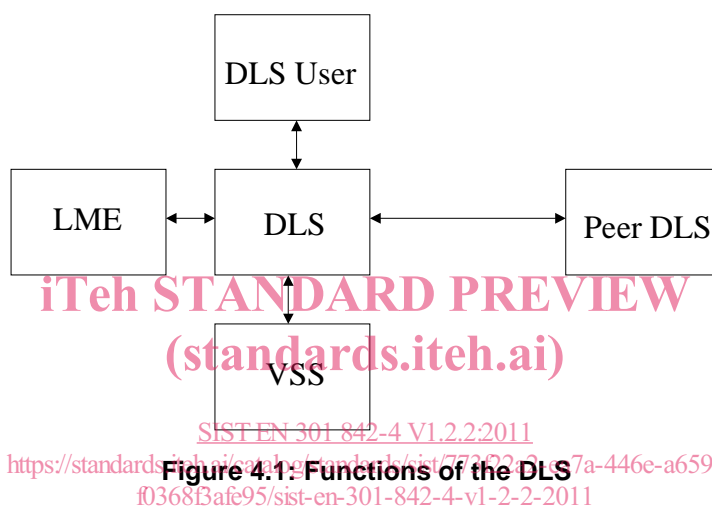


Figure 4.1: Functions of the DLS

Figure 4.2 illustrates the use of various services provided by the DLS and VSS in supporting the DLS User and the LME.