

SLOVENSKI STANDARD SIST EN 16063:2012

01-marec-2012

Embalaža - Toge plastične posode - Nomenklatura za plastična grla

Packaging - Rigid plastic containers - Nomenclature of plastic finishes

Verpackung - Kunststoffbehältnisse - Bezeichnung von Kunststoffverschlussmundstücken

Emballage - Récipients en plastique rigide - Nomenclature des bagues en plastique (standards.iteh.ai)

Ta slovenski standard je istoveten z: EN 16063:2011

https://standards.iteh.ai/catalog/standards/sist/7d98e06f-3a27-4380-969c-

f72bfdbd2337/sist-en-16063-2012

ICS:

55.100 Steklenice. Lonci. Kozarci Bottles. Pots. Jars

SIST EN 16063:2012 en,fr,de

SIST EN 16063:2012

iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST EN 16063:2012

https://standards.iteh.ai/catalog/standards/sist/7d98e06f-3a27-4380-969c-f72bfdbd2337/sist-en-16063-2012

EUROPEAN STANDARD NORME EUROPÉENNE EN 16063

EUROPÄISCHE NORM

November 2011

ICS 55.100

English Version

Packaging - Rigid plastic containers - Nomenclature of plastic finishes

Emballage - Récipients en plastique rigide - Nomenclature des bagues en plastique

Verpackung - Kunststoffbehältnisse - Bezeichnung von Kunststoffverschlussmundstücken

This European Standard was approved by CEN on 29 October 2011.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

SIST EN 16063:2012

https://standards.iteh.ai/catalog/standards/sist/7d98e06f-3a27-4380-969c-f72bfdbd2337/sist-en-16063-2012



EUROPEAN COMMITTEE FOR STANDARDIZATION COMITÉ EUROPÉEN DE NORMALISATION EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: Avenue Marnix 17, B-1000 Brussels

Coi	Page	
Fore	eword	3
Introduction		
1	Scope	5
2	Terms and definitions	5
3	Requirements	5
Ribli	liography	7

iTeh STANDARD PREVIEW (standards.iteh.ai)

<u>SIST EN 16063:2012</u> https://standards.iteh.ai/catalog/standards/sist/7d98e06f-3a27-4380-969c-f72bfdbd2337/sist-en-16063-2012

Foreword

This document (EN 16063:2011) has been prepared by Technical Committee CEN/TC 261 "Packaging", the secretariat of which is held by AFNOR.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by May 2012, and conflicting national standards shall be withdrawn at the latest by May 2012.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

iTeh STANDARD PREVIEW (standards.iteh.ai)

<u>SIST EN 16063:2012</u> https://standards.iteh.ai/catalog/standards/sist/7d98e06f-3a27-4380-969cf72bfdbd2337/sist-en-16063-2012

Introduction

This European Standard is based on the ISBT (International Society of Beverage Technologists) Thread Nomenclature Card [1].

Efficient packaging is of great importance for the distribution and the protection of goods. Insufficient or inappropriate packaging can lead to damage or wastage of the contents of the pack.

iTeh STANDARD PREVIEW (standards.iteh.ai)

<u>SIST EN 16063:2012</u> https://standards.iteh.ai/catalog/standards/sist/7d98e06f-3a27-4380-969cf72bfdbd2337/sist-en-16063-2012

1 Scope

This European Standard specifies the dimension nomenclature for plastic finishes.

Terms and definitions

For the purposes of this document, the following terms and definitions apply.

2.1

lead

axial distance between two consecutive points of intersection of a helix by a line parallel to the axis of the cylinder on which it lies

NOTE The axial movement of a thread part rotated one turn.

2.2

pitch

distance measured parallel with its axis between corresponding points on adjacent thread forms in the same axial plane and on the same side of the axis

NOTE Equals the lead divided by the number of thread starts.


Requirements iTeh STANDARD PREVIEW

Figure 1 gives the points which can be measured on thread finishes.

All defined points are not necessarily required or measured.

https://etandards.tich.ai/catalog/standards/sist/7d98e06f-3a27-4380-969c-

f72bfdbd2337/sist-en-16063-2012

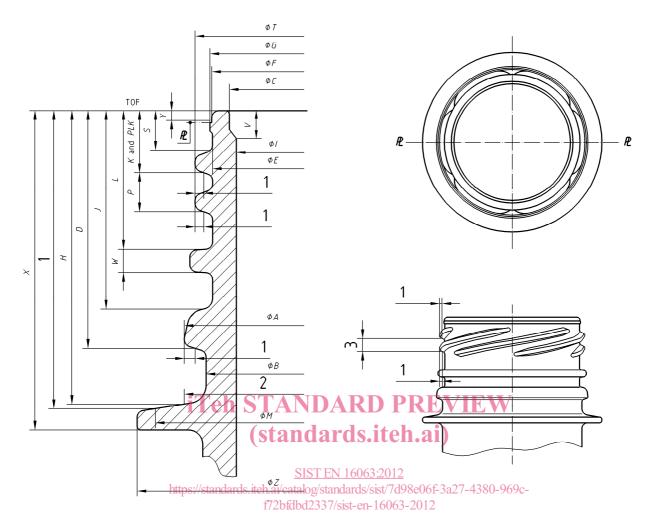

NOTE Reference dimensions are shown in parentheses.

Key			
Α	Tamper evident bead diameter	PLK	Height from TOF to the gauge point of first full
В	Tamper evident band recess diameter		thread taken at parting line (clockwise from
В	Helix angle at pitch diameter Ø pitch = 1/2 (Ø T + Ø E) (not shown)	S	thread start position) Height from TOF to start of full depth of thread
С	Control diameter at TOF	Т	Thread crest diameter
D	Tamper evident bead height measured from	TOF	Top of finish
	TOF to Gauge PT	V	Control diameter depth
E	Thread root diameter	W	Width of bead
F	Upper ring diameter	Χ	Height from TOF to bottom of support ledge
G	Lower ring diameter	Υ	Seal control length
Н	Clearance height required for proper closure	Z	Maximum diameter on support ledge
	function	Gauge PT	A point which may be required for construction
I	Minimum diameter thru finish		or inspection of geometry
J	Height from TOF to the TOP of tamper –	INT PT	Intersection point
	evident bead	TAN PT	Tangency point
K	Height from TOF to the gauge point at start of full thread (at thread start position)	Construction	Dimension provided for creation of geometry and not for general inspection
L	Height from TOF to TOP of bead	(1)	Gauge PT
M	Construction gauge PT on support ledge	(2)	Gauge PT at ØA or ØT preferred
Р	Thread pitch (measured from K)	(3)	P at Gauge PT
PL	Parting line	` '	ŭ

Figure 1 — Points which can be measured on thread finishes