
**Mechanical vibration — Criteria and
safeguards for the *in-situ* balancing of
medium and large rotors**

*Vibrations mécaniques — Critères et sauvegardes relatifs à
l'équilibrage in situ des rotors moyens et grands*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 20806:2004](https://standards.iteh.ai/catalog/standards/sist/055ceefa-0362-4b0f-8c85-e941d6cfb6d6/iso-20806-2004)

[https://standards.iteh.ai/catalog/standards/sist/055ceefa-0362-4b0f-8c85-
e941d6cfb6d6/iso-20806-2004](https://standards.iteh.ai/catalog/standards/sist/055ceefa-0362-4b0f-8c85-e941d6cfb6d6/iso-20806-2004)



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 20806:2004

<https://standards.iteh.ai/catalog/standards/sist/055ceefa-0362-4b0f-8c85-e941d6cfb6d6/iso-20806-2004>

© ISO 2004

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 <i>In-situ</i> balancing	2
4.1 General	2
4.2 Reasons for <i>in-situ</i> balancing	2
4.3 Objectives for <i>in-situ</i> balancing	3
5 Criteria for performing <i>in-situ</i> balancing	3
6 Safeguards	4
6.1 General	4
6.2 Safety of personnel while operating close to a rotating shaft	4
6.3 Special operating envelope for <i>in-situ</i> balancing	4
6.4 Integrity and design of the correction masses and their attachments	4
6.5 Machinery-specific safety implications	4
7 Measurements	4
7.1 Vibration measurement equipment	4
7.2 Measurement errors	5
7.3 Phase reference signals	6
8 Operational conditions	7
9 Reporting	8
9.1 General	8
9.2 Report introduction	8
9.3 Vibration measurement equipment	10
9.4 Results	10
9.5 Text information	11
Annex A (normative) Precautions and safeguards for specific machine types during <i>in-situ</i> balancing	12
Annex B (informative) Example of <i>in-situ</i> balancing report for a boiler fan < 1 MW	13
Annex C (informative) Example of balancing report for a large > 50 MW turbine generator	17
Bibliography	23

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 20806 was prepared by Technical Committee ISO/TC 108, *Mechanical vibration and shock*.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO 20806:2004](https://standards.iteh.ai/catalog/standards/sist/055ceefa-0362-4b0f-8c85-e941d6cfb6d6/iso-20806-2004)

<https://standards.iteh.ai/catalog/standards/sist/055ceefa-0362-4b0f-8c85-e941d6cfb6d6/iso-20806-2004>

Introduction

Balancing is the process by which the mass distribution of a rotor is checked and, if necessary, adjusted to ensure that the residual unbalance or the vibrations of the journals/bearing supports and/or forces at the bearings are within specified limits. Many rotors are balanced in specially designed balancing facilities prior to installation into their bearings on site. However, if remedial work is carried out locally or a balancing machine is not available, it is becoming increasingly common to balance the rotor *in situ*.

In-situ balancing is the process of balancing a rotor in its own bearings and support structure, rather than in a balancing machine.

NOTE This is the same definition as field balancing in ISO 1925:2001, but *in-situ* balancing is easier to understand and will be used in the future. At the next revision of ISO 1925, this term will be updated.

Unlike balancing in a specially designed balancing machine, *in-situ* balancing has the advantage that the rotor is installed in its working environment. Therefore there is no compromise with regard to the dynamic properties of its bearings and support structure, nor from the influence of other elements in the complete rotor train. However, it has the large disadvantage of restricted access and the need to operate the whole machine. Restricted access can limit the planes at which correction masses can be added, and using the whole machine has commercial penalties of both downtime and running costs. Where gross unbalance exists, it may not be possible to balance a rotor *in situ* due to limited access to balance planes and the size of correction masses available.

A general guide to the International Standards associated with mechanical balancing of rotors will be given in ISO 19499 (under preparation). Rotors in a constant (rigid) state are covered by ISO 1940-1 and rotors in a shaft elastic (flexible) state are covered by ISO 11342:2004

<https://standards.iteh.ai/catalog/standards/sist/055ceefa-0362-4b0f-8c85-e941d6cfb6d6/iso-20806-2004>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 20806:2004

<https://standards.iteh.ai/catalog/standards/sist/055ceefa-0362-4b0f-8c85-e941d6cfb6d6/iso-20806-2004>

Mechanical vibration — Criteria and safeguards for the *in-situ* balancing of medium and large rotors

1 Scope

This International Standard specifies procedures to be adopted when balancing medium and large rotors installed in their own bearings on site. It addresses the conditions under which it is appropriate to undertake *in-situ* balancing, the instrumentation required, the safety implications and the requirements for reporting and maintaining records.

This International Standard can be used as a basis for a contract to undertake *in-situ* balancing.

It does not provide guidance on the methods used to calculate the correction masses from measured vibration data.

NOTE The procedures covered in this International Standard are suitable for medium and large machines. However, many of the principles will be equally applicable to machines of a smaller size, where it is necessary to maintain good records of the vibration behaviour and the correction mass configurations.

(standards.iteh.ai)

2 Normative references

ISO 20806:2004

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including amendments) applies.

ISO 1925:2001, *Mechanical vibration — Balancing — Vocabulary*

ISO 2041, *Vibration and shock — Vocabulary*

ISO 2954, *Mechanical vibration of rotating and reciprocating machinery — Requirements for instruments for measuring vibration severity*

ISO 7919 (all parts), *Mechanical vibration — Evaluation of machine vibration by measurements on rotating shafts*

ISO 10816 (all parts), *Mechanical vibration — Evaluation of machine vibration by measurements on non-rotating parts*

ISO 10817-1, *Rotating shaft vibration measuring systems — Part 1: Relative and absolute sensing of radial vibration*

3 Terms and definitions

For the purpose of this document, the terms and definitions given in ISO 1925 and ISO 2041 apply.

4 *In-situ* balancing

4.1 General

For *in-situ* balancing, correction masses are added to the rotor at a limited number of conveniently engineered and accessible locations along the rotor. By doing this the magnitude of shaft and/or pedestal vibrations and/or unbalance is reduced to within acceptable values, so that the machine can operate safely throughout its whole operating envelope.

NOTE In certain cases, machines that are very sensitive to unbalance may not be successfully balanced over the complete operating envelope. This usually occurs when a machine is operating at a speed close to a lightly damped system mode (see ISO 10814), and has load-dependent unbalance.

Most sites have limited instrumentation and data-processing capabilities, when compared to a balancing facility, and additional instrumentation will be required to undertake *in-situ* balancing in these situations. In addition, the potential safety implications of running a rotor with correction masses shall be taken into account.

4.2 Reasons for *in-situ* balancing

4.2.1 Although individual rotors may be correctly balanced, as appropriate, in a high- or low-speed balancing machine, *in-situ* balancing might be required when the rotors are coupled into the complete rotor train. This could be due to a range of differences between the real machine and the isolated environment in the balancing machine, including

- a difference in dynamic characteristics of the rotor supports between the balancing facility and the installed machine,
- assembly errors that occur during the installation of the machine *in situ*,
- rotor systems that cannot be balanced prior to assembly, and
- a changing unbalance state of the rotor under full functional operating conditions.

4.2.2 Balancing might also be required to compensate for in-service changes to the rotor, including

- wear,
- loss of components, such as rotor blade erosion shields,
- repair work, where components could be changed or replaced, and
- movement of components on the rotor train causing unbalance, such as couplings, gas turbine discs and generator end rings.

NOTE Rotor blades will be normally added as balanced sets but this may not be possible if a small number of blades are replaced.

4.2.3 Additionally *in-situ* balancing might be necessary due to a range of economic and technical reasons, including

- the investment in a balancing machine cannot be justified,
- when a suitable balancing machine is not available in the correct location or at the required time, and
- when it is not economic to dismantle the machine and transport the rotor(s) to a suitable balancing facility.

4.3 Objectives for *in-situ* balancing

The reason for balancing is to reduce the vibration magnitude(s) to acceptable values for long-term operation. For most machines, the overall vibration magnitude(s) limits shall either be based on normal practice or the appropriate part of ISO 10816 and ISO 7919 for pedestals and shafts, respectively.

Where the magnitude of unbalance is important, it is necessary to reduce the magnitude of unbalance to within permissible limits (see ISO 1940-1 for details).

5 Criteria for performing *in-situ* balancing

Machines under normal operation and/or during speed variations (following remedial work, or after commissioning) might have unacceptable magnitudes of vibration when compared with normal practice, contractual requirements, or International Standards such as the ISO 10816 and ISO 7919 series. In many cases, it may be possible to bring the machine to within acceptable vibration magnitude by *in-situ* balancing.

Prior to *in-situ* balancing, a feasibility study shall be carried out to assess if the available correction planes are suitable to influence the vibration behaviour being observed, since limited access to correction planes and measurement points on the fully built-up machine can make *in-situ* balancing impractical. Where possible, experience from previous *in-situ* balancing should be used. Sometimes modal analysis may be required.

In-situ balancing shall only be attempted in the following circumstances:

- the reasons for the high vibrations are understood and cannot be corrected at source;
- after analysis of the vibration behaviour, it is judged that balancing is a safe and practical approach;
- under the required normal operating conditions, the vibration vector is steady and repeatable prior to *in-situ* balancing;
- the addition of correction masses only affects the once-per-revolution component of vibration and, therefore, *in-situ* balancing shall only be carried out if this is a significant component of the overall vibration magnitude.

In special circumstances, where the once-per-revolution vibration component changes during normal operation of the machine (such as thermally induced bends in generator rotors), it is possible to optimize the vibration magnitude across the operating envelope by adding correction masses. Here, the vibration magnitude at full speed no load might be compromised to obtain an acceptable vibration magnitude at full load. Again, this shall only be attempted if the reasons for the unbalance are understood.

NOTE When systems are operating in a non-linear mode, correction masses can affect other vibration components, including both sub and high shaft speed harmonics.

The once-per-revolution component of vibration might not originate from unbalance but be generated from system forces such as those seen in hydraulic pumps and electric motors. Many defects, such as shaft alignment errors and tilting bearings, can also contribute to the once-per-revolution component of vibration. Such effects should not normally be corrected by balancing, since balancing will be effective at only a single speed and could mask a real system fault.

The variation of the vibration vectors should be sufficiently steady such that the amplitude of the variation is not significant relative to the amplitude of the mean vibration vector.

6 Safeguards

6.1 General

WARNING — *In-situ* balancing shall only be undertaken by a skilled team, including both customer and supplier, who understand the consequences of adding trial and correction masses and have experience of operating the machine. Failure to do this can place the whole machine and staff at risk.

6.2 Safety of personnel while operating close to a rotating shaft

While undertaking *in-situ* balancing, the machine will be operated under special conditions, allowing access to rotating components to add trial and final correction masses. Strict safety procedures shall be in place to ensure that the machine cannot be rotated while personnel have access to the shaft and that no temporary equipment can become entwined when the shaft is rotated.

6.3 Special operating envelope for *in-situ* balancing

Machines may be quickly run up and run down many times and can have unusual loading conditions during the *in-situ* balancing exercise, which could be outside the normal operating envelope of a machine. Examples for specific machine types that shall be taken into account are given in Annex A. It shall be established that such operations will not be detrimental to the integrity or the life of the whole machine.

However, as no general list of machine types can cover all situations, it is necessary to review individually the integrity requirements for each *in-situ* balance.

6.4 Integrity and design of the correction masses and their attachments

When trial and correction masses are added, it shall be confirmed that they are securely attached and their mountings are capable of carrying the required loads. The correction masses shall not interfere with normal operation, such as coming into contact with stationary components due to shaft expansion. The correction masses should be fitted in accordance with the manufacturers' instructions, if available.

Correction masses are often attached with bolts or by welding. It shall be ensured that the bolt holes or the welding process do not compromise the integrity of the rotor component to which the correction masses are attached, or the function of the component, such as cooling. Furthermore, correction masses shall be compatible with their operating environment, such as heat and chemical atmosphere.

Where possible, the total mass of the correction masses on each plane shall be minimized by consolidating those added from previous balancing exercises. However, correction masses that have been added for specific reasons (such as to balance the individual disc or counteract for blade root eccentricity errors) should not be changed.

6.5 Machinery-specific safety implications

General safety requirements associated with *in-situ* balancing are discussed in 6.2 to 6.4, but precautions and safeguards for specific machine types, given in Annex A, shall be taken into account. However, as no general list of safety precautions can cover all machinery and all situations, it is necessary to review individually the safety requirements for each *in-situ* balance.

7 Measurements

7.1 Vibration measurement equipment

Basic procedures for the evaluation of vibration by means of measurements made directly on the rotating shaft shall conform to ISO 7919-1 and the measurement system shall conform to ISO 10817-1. Measurement procedures for transducers mounted on the pedestal shall conform to ISO 10816-1 and the measurement

system shall conform to ISO 2954. Either system shall have sufficient frequency range to capture data for the full speed range over which the machine is to be balanced. The transducers shall have the necessary sensitivity and shall be located at the appropriate positions to measure the effects of the correction masses.

On flexible support structures, pedestal measurements generally give the best results. On rigid supports, shaft relative transducers are generally more responsive. When eddy current non-contact transducers are used to measure the shaft relative motion, the signal can be corrupted by electrical and/or mechanical run out of the measurement track. Where these signals significantly affect the true reading, appropriate corrections shall be made. If available, shaft absolute measurement may be used, which provides a shaft position independent of the pedestal movement.

The ISO 7919 and ISO 10816 series are concerned with acceptable overall vibration values for machinery operating under steady-state conditions. For balancing, the vibration measurement equipment shall have the additional facility to extract the once-per-revolution component of vibration, giving both amplitude and phase. Furthermore, the ISO 7919 and ISO 10816 series apply to the radial measurement directions on all bearings and the axial direction for only the thrust bearing. However, in some special conditions, axial measurements on other bearings shall be carried out where necessary.

In-situ balancing is normally carried out to reduce the vibration magnitude at the operating speed and while passing through the system resonances, during run up and run down. The measurement equipment shall have sufficient dynamic range to measure both amplitude and phase over the full speed and operating ranges under consideration.

Vibration shall be measured at selected locations where it is necessary to reduce its magnitude. However, balancing can improve the vibration magnitude at other locations or directions at the expense of another. Therefore, it is recommended to have additional transducers on adjacent rotors or bearings. Whilst, for monitoring purposes, measurements in only one direction may be sufficient, for an *in-situ* balance it is advisable to measure in two orthogonal planes, where possible.

Where installed transducers are used, it is advisable to check their calibration, in both magnitude and phase, immediately prior to balancing. Permanently installed shaft relative transducers are not normally checked for calibration, but a phase and shaft run out check is advisable. It is normally sufficient to check the phase of the shaft transducers by ensuring the signal has the correct polarity. Where accessible, pedestal transducers shall be checked against portable equipment.

NOTE In some cases, it can be useful to measure the full orbit of vibration and in this instance it is necessary to have pairs of transducers at selected axial measurement locations along the shaft. Strictly, it is only necessary to have two non-parallel transducers to describe the orbit, however orthogonal pairs are usually used.

7.2 Measurement errors

Any measurement is subject to error, which is the difference between the true and the measured values. The difference is called the error of measurement and, in balancing, this is caused by a combination of systematic, randomly variable and scalar errors. Systematic errors are those when both magnitude and phase of the unbalance error can be evaluated by either calculation or measurement. Random errors are those when both the magnitude and phase of the unbalance can vary unpredictably, and scalar errors occur when the magnitude of the unbalance can be evaluated or estimated but the angle is undefined.

ISO 1940-2 gives examples of typical errors that can occur in the field of balancing and provides procedures for their determination. Some of the examples presented are for the balancing facility, but many are also applicable to *in-situ* balancing.

The limit for these errors shall be matched to the acceptance criteria of the *in-situ* balancing, as agreed between the supplier and customer (see 4.3).

7.3 Phase reference signals

7.3.1 General

A phase reference mark, such as a keyway or reflective tape, is usually placed on the shaft or any synchronous part, and is detected by a transducer mounted on a non-rotating component, such as a bearing pedestal. This provides a once-per-revolution signal from which the phase of the vibration can be measured.


Sometimes the reference mark is permanently installed. The reference mark, such as a keyway or markings on the shaft, shall be clearly documented and, if possible, shall be visible to allow correction masses to be accurately placed.

In addition, the direction of shaft rotation shall be established so that phase angles, with or against rotation, can be translated into the appropriate correction mass locations. Measured angles with rotation (phase lead) will require correction masses to be located in the direction of rotation from the leading edge of the phase mark. Angles measured against rotation (phase lag) will require the correction mass to be located against the direction of rotation from the leading edge of the phase mark.

Alternative phase definitions may be adopted, but the system used shall be clearly defined. It is good practice to ensure that the phase angle used for the location of the correction mass is consistent with the phase angle of the once-per-revolution vibration.

7.3.2 Information required for reproducible phase reference data

The position of the shaft phase reference shall be consistently defined to provide accurate records so that previous and future *in-situ* balancing data can be compared (see Clause 9). The pulse generated by the shaft mark shall be sharp so that different trigger levels will not lead to inaccurate phase measurements. The sinusoidal type signal (see Figure 1) can give a trigger time dependent on the level of the trigger setting, but the sharp pulse (see Figure 2) will give a trigger time independent of the trigger voltage setting. Triggering shall be from the leading edge of the pulse, for either negative or positive going pulses (either negative or positive slope). Triggering on the trailing edge could lead to significant phase errors, since the pulse width might not reflect the width of the phase mark and will depend on the pulse signal conditioning.

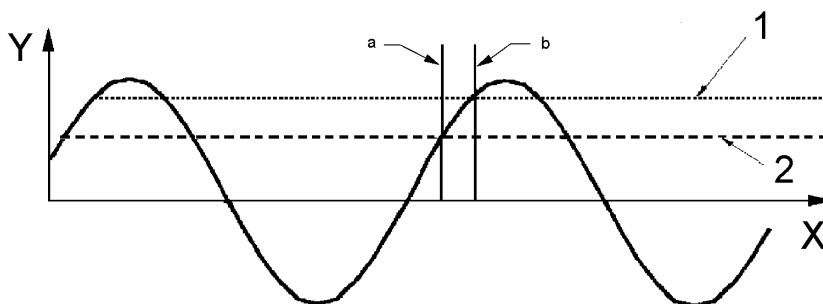

Key

- X time
- Y tachometer signal (volts)
- 1 trigger level 1
- 2 trigger level 2
- a Time of trigger level 2.
- b Time of trigger level 1.

Figure 1 — Bad phase reference signal