



Standard Specification for Suction Strainer Boxes¹

This standard is issued under the fixed designation F 986; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope

1.1 This specification covers the design, materials, and construction of strainer boxes for use in ships' bilges and other such tank locations that require trash protection for suction pipes and pumps.

1.2 This specification covers pipe sizes from NPS 1½ through NPS 16 (see Note 1).

NOTE 1—The dimensionless designator NPS (nominal pipe size) has been substituted in this specification for such traditional terms as “nominal diameter,” “size,” and “nominal size.”

1.3 The values stated in inch-pound units are to be regarded as the standard.

2. Referenced Documents

2.1 ASTM Standards:²

A 36/A 36M Specification for Carbon Structural Steel

A 123/A 123M Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products

F 593 Specification for Stainless Steel Bolts, Hex Cap Screws, and Studs

F 594 Specification for Stainless Steel Nuts

F 708 Practice for Design and Installation of Rigid Pipe Hangers

2.2 American Welding Society Standard:³
AWS D1.3 Structural Welding Code—Sheet Steel

3. Classification

3.1 This specification covers two types of strainer boxes.

3.1.1 *Type 1*—Strainer boxes with pipe clamp centered on the top of the strainer box (see Fig. 1).

3.1.2 *Type 2*—Strainer boxes with the pipe clamp off center in the top of the strainer box (see Fig. 2).

4. Ordering Information

4.1 Ordering information required is as follows.

4.1.1 ASTM specification and year of issue.

4.1.2 Type.

4.1.3 Size (suction pipe NPS).

4.1.4 Dimensions *G* and *H* (Type 2 only).

4.1.5 Number of each type and size.

5. Materials and Manufacture

5.1 For information on materials, see Table 1.

5.2 Welding shall be in accordance with AWS D1.3.

5.3 Perforated sheet metal shall have ⅜-in. diameter holes on staggered ½-in. centers, 51 % open area.

6. Dimensions and Tolerances

6.1 *Tolerance*— $\pm 1/16$ in.

6.2 *Strainer Box Dimensions*:

6.2.1 *Type 1*—See Table 2.

6.2.2 *Type 2*—See Table 3.

7. Workmanship, Finish, and Appearance

7.1 Strainer boxes shall be hot galvanized in accordance with Specification A 123/A 123M after fabrication. The galvanizing shall be a minimum of 2 mils thick.

7.2 Strainer boxes shall be free of defects, burrs, and sharp edges.

8. Installation

8.1 Strainer boxes are normally installed on suction pipes in ballast and bilge spaces.

8.2 Minimum suction pipe or tank bottom clearances are indicated in Column “F” in Table 2 and Table 3. Dimension callout is based on ½ × the tailpipe nominal pipe size.


8.3 Tank structure and sloping bottom structure may obscure the above clearance down to the limit of the resulting periphery clear area, being 1.5 × the inside diameter of the tailpipe. Structure outside the limit of ½ the pipe NPS need not be considered as obstructing flow.

¹ This specification is under the jurisdiction of ASTM Committee F25 on Ships and Marine Technology and is the direct responsibility of Subcommittee F25.11 on Machinery and Piping Systems.

Current edition approved May 1, 2004. Published May 2004. Originally approved in 1986. Last previous edition approved in 1997 as F 986 - 86 (1997).

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

³ Available from The American Welding Society (AWS), 550 NW LeJeune Rd., Miami, FL 33126.

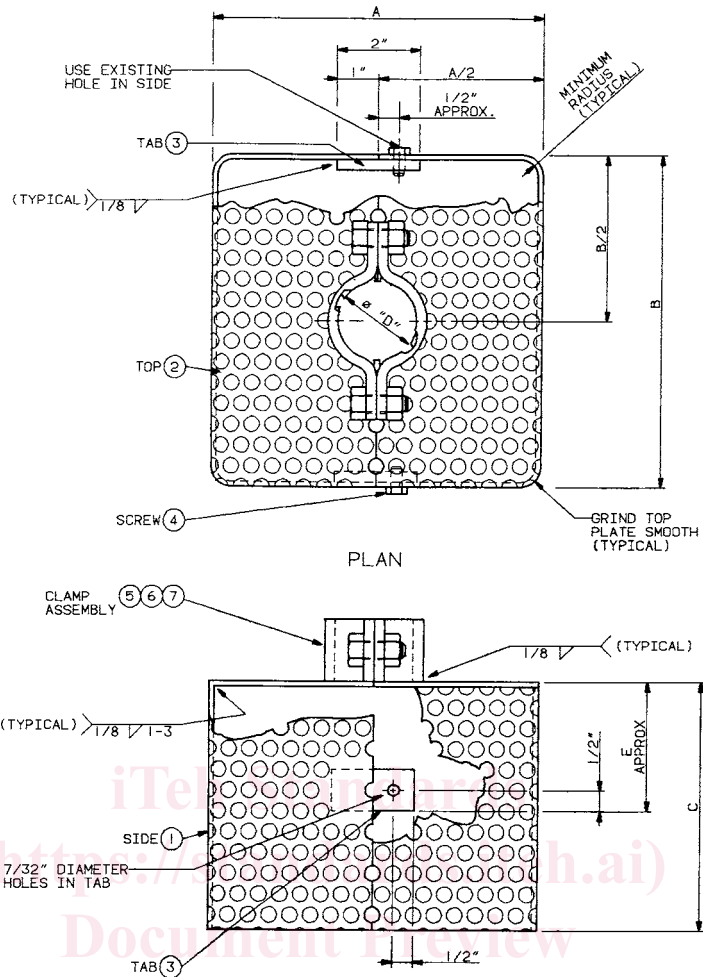

NOTE 1—Tab location to suit perforated holes.

FIG. 1 Type 1—Elevation Strainer Box

<https://standards.iteh.ai/catalog/standards/sist/3df873ad-d8be-488a-b54a-54378775f8db/astm-f986-862004>