



Standard Guide for Escort Vessel Evaluation and Selection¹

This standard is issued under the fixed designation F1878; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope

1.1 This guide covers the evaluation and selection of escort vessels that are to be used to escort ships transiting confined waters. The purpose of the escort vessel is to limit the uncontrolled movement of a ship disabled by loss of propulsion or steering to within the navigational constraints of the waterway. The various factors addressed in this guide also can be integrated into a plan for escorting a given ship in a given waterway. The selection of equipment also is addressed in this guide.

1.2 This guide can be used in performance-based analyses to evaluate:

1.2.1 the control requirement of a disabled ship,

1.2.2 the performance capabilities of escort vessels,

1.2.3 the navigational limits and fixed obstacles of a waterway,

1.2.4 the ambient conditions (wind and sea) that will impact the escort response, and

1.2.5 the maneuvering characteristics of combined disabled ship/escort vessel(s).

1.3 This guide outlines how these various factors can be integrated to form an escort plan for a specific ship or a specific waterway. It also outlines training programs and the selection of equipment for escort-related activities.

1.4 A flowchart of the overall process for developing and implementing an escort plan is shown in Fig. 1. The process begins with the collection of appropriate data, which are analyzed with respect to the performance criteria and in consultation with individuals having local specialized knowledge (such as pilots, waterway authorities, interest groups, or public/private organizations, and so forth). This yields escort vessel performance requirements for various transit speeds and conditions; these are embodied in the ship's escort plan. When the time comes to prepare for the actual transit, the plan is consulted in conjunction with forecast conditions and desired transit speed to select and dispatch the appropriate escort vessel (or combination of vessels). A pre-escort conference is con-

ducted to ensure that all principal persons (ship master, pilot, and escort vessel masters) have a good understanding of how to make a safe transit and interact in the event of an emergency.

1.5 This guide addresses various aspects of escorting, including several performance criteria and methodologies for analyzing the criteria, as well as training, outfitting, and other escort-related considerations. This guide can be expanded as appropriate to add new criteria, incorporate "lessons learned" as more escorting experience is gained in the industry, or to include alternative methodologies for analyzing the criteria.

1.6 This guide addresses physical control of the disabled ship with the assistance of the escort vessel(s). Other possible functions, such as firefighting, piloting, or navigational redundancy, are outside the scope of this guide. Also, this guide was developed for application to oceangoing ships in coastal waterways; it is not suitable for application to barge strings in riverine environments.

2. Referenced Documents

2.1 *Code of Federal Regulations Document*:²

33 CFR Part 168—Escort Vessels for Certain Tankers, Final Rule

2.2 *IMO Resolutions*:³

IMO Resolution A.601(15)—Provision and Display of Maneuvering Information on Board Ships

IMO Resolution A.751(18)—Interim Standards for Ship Maneuverability

2.3 *Marine Safety Committee Circulars*:³

MSC Circular 389/Interim Guidelines for Estimating Maneuvering Performance in Ship Design

MSC Circular 644/Explanatory Notes to the Interim Standards for Ship Maneuverability

3. Terminology

3.1 For purposes of clarity within this guide, the vessel being escorted is referred to as the "ship" or "disabled ship." The vessel accompanying the ship as its escort is referred to as the "escort vessel."

¹ This guide is under the jurisdiction of Committee F25 on Ships and Marine Technology and is the direct responsibility of Subcommittee F25.06 on Marine Environmental Protection.

Current edition approved May 1, 2004. Published May 2004. Originally approved in 1998. Last previous edition approved in 1998 as F1878 - 98. DOI: 10.1520/F1878-98R04.

² Available from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

³ Available from the International Maritime Organization, 4 Albert Embankment, London, SE1 7SR U.K.

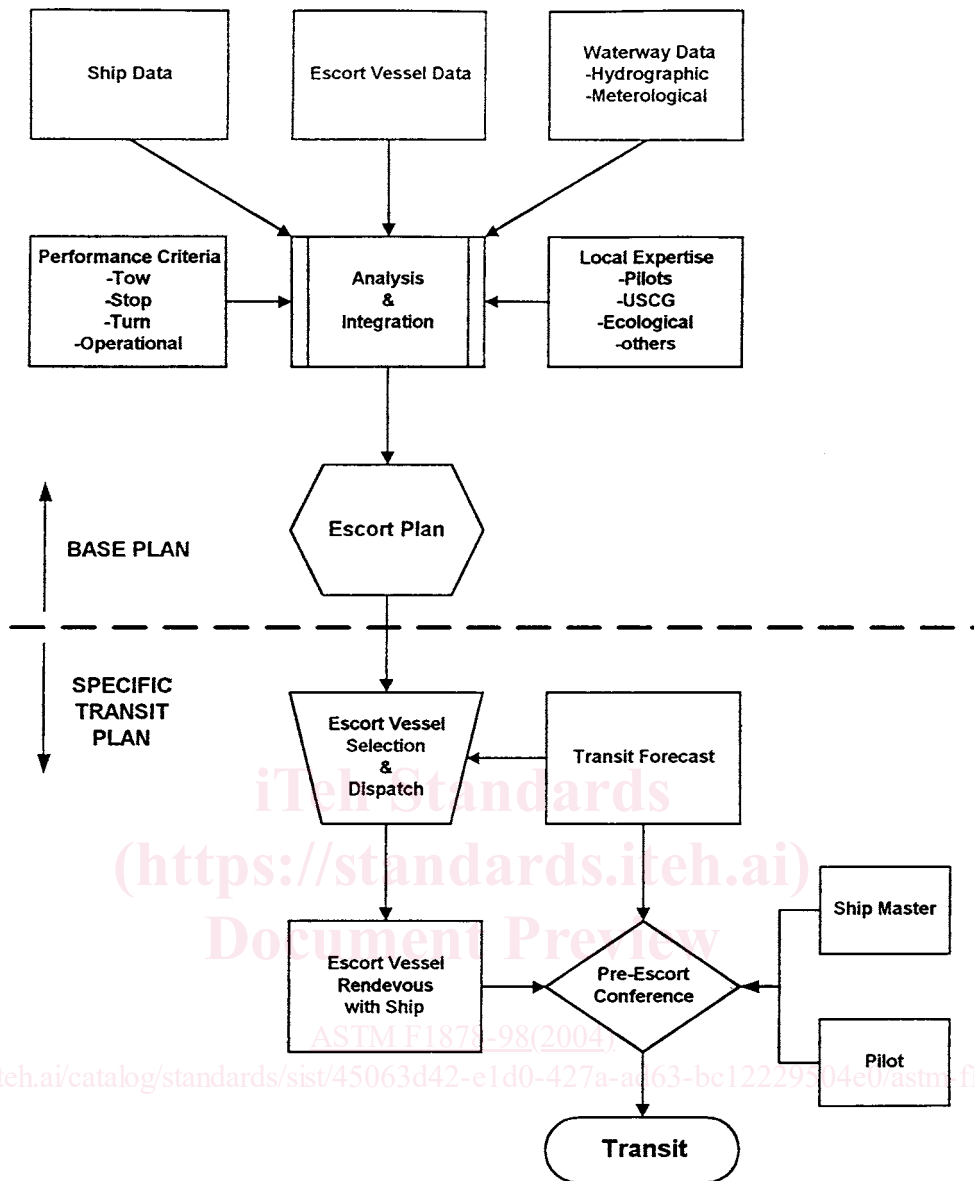


FIG. 1 Flowchart of the Overall Process for Developing and Implementing an Escort Plan

3.2 The escorting measures addressed in this guide are based on performance.

3.2.1 The term “performance measure” refers to performance capabilities that must be possessed by the escort vessel(s) in controlling the disabled ship within a particular waterway. This requires a holistic analysis of the combined maneuvering dynamics of the escort vessel(s) and ship within the waterway in ambient weather and sea conditions. Performance-based requirements involve extensive preplanning and analyses, but offer greater assurance that the escort vessel(s) actually will be effective. The methodologies and processes presented in this guide can be used in determining the performance envelope of an escort vessel at different transit speeds and under a range of weather and sea conditions.

3.3 The terms “conventional propulsion” and “omni-directional propulsion” refer to propulsion systems of the escort vessel.

3.3.1 *Conventional Propulsion System*—The propulsive thrust is fixed in a fore/aft direction.

3.3.2 *Omni-Directional Propulsion System*—The propulsive thrust is steerable in any direction (360°) around the hull. Examples are the azimuthing Z-drive screw propeller system and the vertical axis cycloidal system.

3.4 The terms “direct mode” and “indirect mode” refer to two towing modes for exerting control forces on a disabled ship via towline from the escort vessel.

3.4.1 *Direct Mode*—The towline force is derived directly from the escort vessel’s propulsion system. In general, the towline orientation is over the bow or over the stern of the escort vessel, and only the propulsive thrust vector parallel to the towline axis is effective on the disabled ship.

3.4.2 *Indirect Mode*—The towline force is derived from the escort vessel’s hull drag as it is pulled along behind the disabled ship (similar to a drag chute). High-performance

escort vessels should have sufficient stability so that they can turn approximately sideways to the towline without capsizing (tripping), thereby substantially increasing their hull drag and, consequently, increasing their towline force. The propulsion system of these escort vessels is used indirectly to maintain an over-the-side towline orientation (rather than pull directly on the towline itself). In the indirect mode, specially designed escort vessels can kite off to one side or the other of the disabled ship's stern, thereby imposing substantial steering forces on the ship as well as retarding forces to slow it down.

3.5 The terms "parameters" and "constraints" refer to additional conditions that define the escort scenario and response.

3.5.1 *Parameters*—Additional details that are specified as part of the performance criteria to define more fully the performance "problem" that must be solved by the escort vessel(s). Parameters are used to customize the performance criteria to reflect a particular waterway or a specific performance objective. Examples of parameters include an initial ship speed at moment of failure, or winds, currents, and sea state conditions that must be assumed during the escort response.

3.5.2 *Constraints*—Limitations associated with "solving" the performance problem. Examples of constraints include the stability limits of the escort vessel (which limit how much towline heeling moment the escort vessel can tolerate), strength limits of the ship's bollards (which limit how much towline force can be applied), or the navigable limits of the waterway (which limit how much maneuvering room is available).

3.6 Definitions:

3.6.1 *allision, n*—a collision with a fixed object.

3.6.2 *allowable reach, n*—the straight line distance forward from the designated ship, parallel to its course direction, to a point at which a grounding of an allision would occur.

3.6.3 *allowable transfer, n*—the straight line distance from the designated ship, perpendicular to its course direction, to a point at which a grounding or an allision would occur.

3.6.4 *assist maneuver, n*—an escort vessel maneuver in which the assisting escort vessel(s) apply maximum steering force to a disabled ship to enhance the turn of the rudder. In this maneuver, the objective is to make the radius of turn of the ship as small as possible.

3.6.5 *emergency scenarios, n*—the complete description of the failure, the navigational situation, and the emergency assist response.

3.6.6 *escort operating area, n*—a subregion of the waterway, harbor, bay, and so forth, that has been identified as the region in which the escort vessel(s) will stand by or accompany the designated ship. The subregion may contain locations that would require timely escort vessel assistance should the ship experience a propulsion or steering failure, or both.

3.6.7 *escort vessel, n*—a vessel that is assigned to stand by or is dedicated to travel in close proximity to a designated ship to provide timely assistance should the ship experience a propulsion or steering failure, or both. The escort vessel has appropriate fendering and towing gear to provide emergency assist capability relative to the demand of the disabled ship.

3.6.8 *grounding, n*—impact of a ship's hull with the sea bottom.

3.6.9 *maneuvering coefficients, n*—a set of numerical coefficients that are used in polynomial representations of the forces acting on a ship in terms of the instantaneous state of the ship.

3.6.10 *oppose maneuver, n*—an escort vessel maneuver in which the assisting escort vessel(s) apply maximum steering force to a disabled ship to turn the ship against its rudder. In this maneuver, the objective is to return the ship to its original heading by opposing the rudder forces.

3.6.11 *propulsion failure, n*—the ship is unable to propel or actively stop itself.

3.6.12 *response times, n*—the sequence of time delays following a disabling failure on a transiting ship before the escort vessel(s) can apply corrective forces.

3.6.13 *rescue tow, n*—a maneuver in which the escort vessel makes up lines and pulls the disabled ship; undertaken after all forward way has come off the disabled ship.

3.6.14 *retard maneuver, n*—an escort vessel maneuver in which the assisting escort vessel(s) apply maximum braking force to a disabled ship. In this maneuver, the objective is to take speed off the ship as quickly as possible by pulling astern. The control of a ship's heading is not an objective. Also referred to as *arrest*.

3.6.15 *rudder failure, n*—the ship's rudder is locked at some angle or it is swinging uncontrollably.

3.6.16 *ship track/course, n*—the path covered by the ship's center of gravity during a voyage, a waterway transit, or a maneuver.

3.6.17 *tactical diameter, n*—the distance, perpendicular to the original course direction, between the ship's center of gravity at the start and at the end of a 180° heading change.

3.6.18 *zigzag maneuver, n*—a test used to measure the effectiveness of the rudder to initiate and check course changes. The maneuver is described in MSC Circular 644, Section 2.2.

3.7 Evaluation and Selection Variables:

3.7.1 *transit speeds, n*—the speed of the escorted ship measured through the water. The transit speed takes into account tidal and wind-driven currents. Transit speed is not over ground (SOG) as measured by Global Positioning System (GPS), Loran, or radar.

3.7.2 *bollard pull, n*—the maximum sustainable force that the escort vessel is able to develop while pulling on a towline attached to a stationary object. The forward and astern bollard pulls are individually specified.

3.7.3 *dynamic pull (at a particular speed), n*—the maximum sustainable force that the escort vessel is able to develop while moving through the water at a particular speed.

3.7.4 *transfer, n*—the distance perpendicular to the original track that a ship's center of gravity travels in a 90° change in heading.

3.7.5 *advance, n*—the distance parallel to the original track that a ship's center of gravity travels in a 90° change of heading.

3.7.6 *performance limits, n*—limits of performance measures such that under all circumstances, the use of vessels, equipment, or crew shall not place the life and safety of

individuals in jeopardy. No applicable federal or state regulations should be exceeded in determining escort vessel performance capabilities and limits.

4. Significance and Use

4.1 This guide presents some methodologies to predict the forces required to bring a disabled ship under control within the available limits of the waterway, taking into account local influences of wind and sea conditions. Presented are methodologies to determine the control forces that an escort vessel can reasonably be expected to impose on a disabled ship, taking into account the design of the ship, transit speed, winds, currents, and sea conditions. In some instances, this guide presents formulae that can be used directly; in other instances, in which the interaction of various factors is more complicated, it presents analytic processes that can be used in developing computer simulations.

4.2 Unlike the more traditional work of berthing assistance in sheltered harbors or pulling a “dead ship” on the end of a long towline, the escorting mission assumes that the disabled ship will be at transit speed at the time of failure, and that it could be in exposed waters subject to wind, current, and sea conditions.

4.3 The navigational constraints of the channel or waterway might restrict the available maneuvering area within which the disabled ship must be brought under control before it runs aground or collides with fixed objects in the waterway (see *allision*).

4.4 The escort mission requires escort vessel(s) that are capable of responding in timely fashion and that can safely apply substantial control forces to the disabled ship. This entails evaluation of the escort vessel’s horsepower, steering and retarding forces at various speeds, maneuverability, stability, and outfitting (towing gear, fendering, and so forth). This guide can be used in developing escort plans for selecting suitable escort vessel(s) for specific ships in specific waterways.

4.5 The methodologies and processes outlined in this guide are for performance-based analyses of escort scenarios. This means that the acceptability of a vessel (or combination of vessels) for escorting is based upon the ability to control the disabled ship in accordance with specified performance criteria. This guide addresses four selected performance measures:

4.5.1 *Towing*—the ability to tow the disabled ship under specified parameters,

4.5.2 *Stopping*—the ability to stop the disabled ship within specified parameters,

4.5.3 *Turning*—the ability to turn the disabled ship within specified parameters, and

4.5.4 *Holding steady*—the ability to hold the disabled ship on a steady course under specified parameters.

4.6 The “specified parameters” are additional details that must be factored into the performance analysis. These parameters might be specified by a regulatory agency imposing the escort requirement, by a study group evaluating the feasibility of escorting in a particular waterway, or by the ship or escort vessel operators themselves to define the performance envelope of their vessels. Some examples of these parameters are:

4.6.1 A ship transit speed (at the moment of failure);

4.6.2 The failure scenario (rudder failure alone, or simultaneous rudder/propulsion failure, degree of failure, and so forth);

4.6.3 Navigational constraint within which the disabled ship must be brought under control (such as allowable advance and transfer, cross-track error, and so forth);

4.6.4 Wind, current, and sea conditions; and

4.6.5 Time delays, failure recognition, decision making, escort vessel notification, escort vessel positioning, achieving full power, and so forth.

4.7 The anticipated users of this guide are:

4.7.1 Ship owners/operators who are required to select escort vessel(s) that meet the performance measures addressed by this guide.

4.7.2 Escort vessel designers/operators who need to evaluate the performance capabilities of their vessels with respect to the measures addressed by this guide.

4.7.3 Regulatory agencies that have imposed the performance measures in this guide in a particular waterway to develop suitable escort vessel matrices for various sized ships in the waterway.

4.7.4 Enforcement agencies can use this guide to confirm/verify compliance with the performance measures (that is, that suitable escort vessel(s) are being selected).

4.7.5 Study groups can use this guide to explore the feasibility and effectiveness of escorting as a means of mitigating risk on a particular waterway.

4.8 This guide does not address the use of escort vessels with barge fleets or barge tows. However, some sections of this guide would be useful if an evaluation of escort vessels with barge shipments were undertaken. Paragraphs 5.4 and 5.5, and all of Section 6 would apply in this type of analysis.

4.9 The methodologies and processes presented in this guide will yield valid solutions to the performance measures. This means that the selected escort vessel(s) can reasonably be expected to control the disabled ship within the specified parameters. However, users are reminded that other circumstances surrounding the disabling incident may still preclude the escorts from safely responding (such as fire).

4.10 The methodologies in this guide are not necessarily the only ones that can be used to find solutions for the performance measures. There may be other analytic approaches that also will yield valid results. It is hoped that as these alternative methods are developed, they will be incorporated into this guide.

5. Data Requirements for Analysis

5.1 This section describes the data required for an escort vessel evaluation and selection analysis. This analysis is part of the development of an escort plan. The data recommended for inclusion in an escort plan document are presented in Section 8.

5.2 The data required for this analysis must be either an accurate evaluation of ship and escort vessel characteristics or must be based on conservative assumptions regarding those characteristics.

5.3 *Ship Data:*

5.3.1 It is recommended that, as a minimum, the ship information contained on the IMO A.601(15) defined pilot card

and wheelhouse poster be collected for use in developing and verifying an escort vessel analysis. Examples of the pilot card and wheelhouse poster are shown in Figs. 2-5. The completed forms can be made part of an escort plan.

5.3.2 In addition, the following ship-specific characteristics can be used in the development of an escort plan and can be used in the validation of ship-maneuvering simulation computer models:

5.3.2.1 Unpropelled advance and transfer distances starting from an engine stop order with rudder amidships at the proposed transit speed until a speed of 1 knot is achieved in calm conditions at level trim in deep water.

5.3.2.2 Crash stop (full engine astern) advance and transfer distances at a speed of 1 knot with port and starboard locked

rudder starting from the proposed transit speed in calm conditions at level trim in deep water.

5.3.2.3 Dead ship tow behavior and tow force requirements for a range of wind speeds characteristic of the escort area, including associated wave heights and the effects of vessel trim on towing behavior.

5.3.2.4 Data from full-scale ship-escort vessel trials, if conducted.

5.4 Escort Vessel Data:

5.4.1 It is recommended that, as a minimum, the escort vessel information shown in Fig. 6 be obtained.

5.4.2 In addition, the additional information shown in Fig. 7 can be used in the development of an escort plan.


Ship's name _____ Date _____

Call sign _____ Deadweight _____ tonnes Year built _____

Draught aft _____m/____ft ____in, Forward _____m/____ft ____in, Displacement _____tonnes

SHIP'S PARTICULARS

Length overall _____m, Anchor chain: Port _____shackles, Starboard _____shackles,
 Breadth _____m Stern _____shackles
 Bulbous bow Yes/No (1 shackle = _____m/_____fathoms)

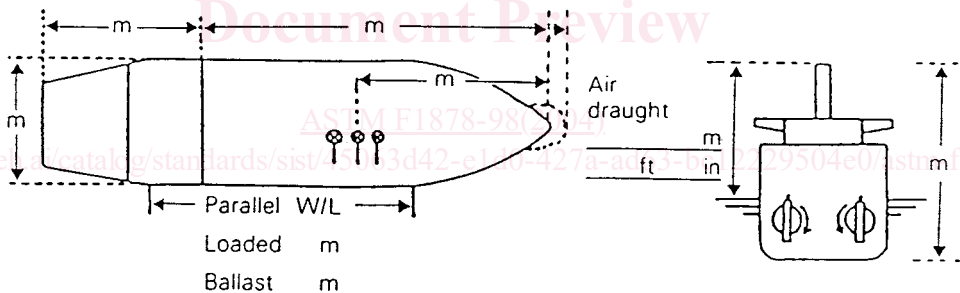

| Type of engine _____ | | Maximum power _____ kW (_____ HP) | |
|--------------------------|-----------|------------------------------------|---------|
| Manoeuvring engine order | Rpm/pitch | Speed (knots) | |
| | | Loaded | Ballast |
| Full ahead | | | |
| Half ahead | | | |
| Slow ahead | | | |
| Dead slow ahead | | | |
| Dead slow astern | | Time limit astern _____ min | |
| Slow astern | | Full ahead to full astern _____ s | |
| Half astern | | Max. no. of consec. starts _____ | |
| Full astern | | Minimum RPM _____ knots | |
| | | Astern power _____ % ahead | |

FIG. 2 Pilot Card

| STEERING PARTICULARS | | | |
|---|--------------------------|----------------------------|--|
| Type of rudder _____ | Maximum angle _____ ° | | |
| Hard-over to hard-over _____ s | | | |
| Rudder angle for neutral effect _____ ° | | | |
| Thruster: | Bow _____ kW (_____ HP) | Stern _____ kW (_____ HP) | |

CHECKED IF ABOARD AND READY

| | | | |
|---------------------------------|--------------------------------|------------------------|--------------------------|
| Anchors | <input type="checkbox"/> | Indicators: | |
| Whistle | <input type="checkbox"/> | Rudder | <input type="checkbox"/> |
| Radar | <input type="checkbox"/> 3 cm | Rpm/pitch | <input type="checkbox"/> |
| | <input type="checkbox"/> 10 cm | Rate of turn | <input type="checkbox"/> |
| ARPA | <input type="checkbox"/> | Compass system | <input type="checkbox"/> |
| Speed log | <input type="checkbox"/> | Doppler: Yes/No | <input type="checkbox"/> |
| Water speed | <input type="checkbox"/> | Constant gyro error | ± _____ ° |
| Ground speed | <input type="checkbox"/> | VHF | <input type="checkbox"/> |
| Dual-axis | <input type="checkbox"/> | Elec. pos. fix. system | <input type="checkbox"/> |
| Engine telegraphs | <input type="checkbox"/> | Type | _____ |
| Steering gear | <input type="checkbox"/> | | |
| Number of power units operating | <input type="checkbox"/> | | |

OTHER INFORMATION:

FIG. 2 Pilot Card (continued)

5.4.3 Alternatively, data from scale model testing or instrumented full-scale trials can be used in the development of an escort plan.

5.5 Waterway Data:

5.5.1 *Transit Routes and Escort Zones*—Transit route(s) through the escort area must be identified. For routes that pass through distinctly different regions, it may be beneficial to divide the escort area into separate zones based on the environment and the severity of the constraints. This procedure will separate a zone with severe constraints from one that is less restrictive. Different escort vessels can be used in the different zones to satisfy the requirements of this guide.

5.5.2 *Navigational Constraints*—The geography of the escort area should be evaluated to determine its navigational limits. It is within these constraints that a disabled ship must be stopped or controlled if a grounding is to be prevented. Such limits might be prescribed by a minimum under-keel clearance, a particular depth contour, or a safety distance from a point hazard.

5.5.3 *Environmental Conditions*—The climatology of the escort area, including wind speeds, wind directions, wave heights, wave periods, wave directions, current speeds, and current directions should be assembled. If there are significant seasonal variations in the climatological conditions and if

seasonally varying escort plans are to be prepared, then the climatological data for each season should be assembled.

5.5.4 *Particular Hazards*—A list of points of particular hazard along the transit route should be compiled.

6. Determination of Escort Vessel Capability

6.1 Two different approaches to escort vessel performance measures are presented. Paragraph 6.2 discusses selected performance measures. Paragraph 6.3 discusses operational performance measures. Operational performance measures differ from selected performance measures in both definition and methodology for determination of adequacy.

6.2 *Selected Performance Measures:*

6.2.1 Selected performance measures can be thought of as the ship demand for escort vessel capability. These measures can be chosen by regulatory bodies at either the state or national level, or they can be chosen by vessel operators as a means of setting minimum performance standards for their own evaluation and selection of escort vessel(s). These measures can be specified so as to be waterway and weather independent. They would not require consideration of such operational issues as time delays for the application of escort vessel force and procedures for applying those forces.




Ship's name _____, Call sign _____, Gross tonnage _____, Net tonnage _____
 Max. displacement _____tonnes, and Deadweight _____tonnes, and Block coefficient _____ at summer full load draught

| Draught at which the manoeuvring data were obtained <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">Loaded</td> <td style="width: 50%;">Ballast</td> </tr> <tr> <td>Trial/Estimated</td> <td>Trial/Estimated</td> </tr> <tr> <td>____m forward</td> <td>____m forward</td> </tr> <tr> <td>____m aft</td> <td>____m aft</td> </tr> </table> | Loaded | Ballast | Trial/Estimated | Trial/Estimated | ____m forward | ____m forward | ____m aft | ____m aft | <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th colspan="2" style="text-align: center;">STEERING PARTICULARS</th> </tr> <tr> <td>Type of rudder(s)</td> <td>_____</td> </tr> <tr> <td>Maximum rudder angle</td> <td>_____</td> </tr> <tr> <td>Time hard-over to hard over</td> <td></td> </tr> <tr> <td style="padding-left: 20px;">with one power unit</td> <td>_____ s</td> </tr> <tr> <td style="padding-left: 20px;">with two power units</td> <td>_____ s</td> </tr> <tr> <td>Minimum speed to maintain course propeller stopped</td> <td>_____ knots</td> </tr> <tr> <td>Rudder angle for neutral effect</td> <td>_____ °</td> </tr> </table> | STEERING PARTICULARS | | Type of rudder(s) | _____ | Maximum rudder angle | _____ | Time hard-over to hard over | | with one power unit | _____ s | with two power units | _____ s | Minimum speed to maintain course propeller stopped | _____ knots | Rudder angle for neutral effect | _____ ° | <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th colspan="3" style="text-align: center;">ANCHOR CHAIN</th> </tr> <tr> <td></td> <td style="text-align: center;">No. of shackles</td> <td style="text-align: center;">Max. rate of heaving (min/shackle)</td> </tr> <tr> <td style="text-align: center;">Port</td> <td></td> <td></td> </tr> <tr> <td style="text-align: center;">Starboard</td> <td></td> <td></td> </tr> <tr> <td style="text-align: center;">Stern</td> <td></td> <td></td> </tr> <tr> <td colspan="3" style="text-align: center;">(1 shackle = ____m/____fathoms)</td> </tr> </table> | ANCHOR CHAIN | | | | No. of shackles | Max. rate of heaving (min/shackle) | Port | | | Starboard | | | Stern | | | (1 shackle = ____m/____fathoms) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|------------------------|---|----------------------------|---|---------------------------|---------------------------|--------------|-------------------|---|----------------------|------------------------|-------------------|----------------|----------------------|-------|-----------------------------|----------------------|------------------------------|---------------------|----------------------|------------|--|-------------|---------------------------------|------------|---|--------------|--|-----------------|--|-----------------|------------------------------------|------------------|---|---|-----------|-------------|--|--|--|-------------|---------------------------------|--|----|-------------|--|--|--|--|-------------------------------------|--|--|--|--|--|----------|---------|----------------------------|----------------------------|-----------------------------------|---------------------------|-----|--|---|-------|-------|-------|-------|--|---|-------|-------|-------|----------|--|---|-------|-------|-------|
| Loaded | Ballast | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Trial/Estimated | Trial/Estimated | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ____m forward | ____m forward | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ____m aft | ____m aft | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| STEERING PARTICULARS | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Type of rudder(s) | _____ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Maximum rudder angle | _____ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Time hard-over to hard over | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| with one power unit | _____ s | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| with two power units | _____ s | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Minimum speed to maintain course propeller stopped | _____ knots | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Rudder angle for neutral effect | _____ ° | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANCHOR CHAIN | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | No. of shackles | Max. rate of heaving (min/shackle) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Port | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Starboard | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Stern | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| (1 shackle = ____m/____fathoms) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th colspan="3" style="text-align: center;">PROPULSION PARTICULARS</th> </tr> <tr> <td colspan="3">Type of engine _____ kW (____HP), Type of propeller _____</td> </tr> <tr> <th rowspan="2" style="text-align: center;">Engine order</th> <th rowspan="2" style="text-align: center;">Rpm/pitch setting</th> <th colspan="2" style="text-align: center;">Speed (knots)</th> </tr> <tr> <th style="text-align: center;">Loaded</th> <th style="text-align: center;">Ballast</th> </tr> <tr> <td style="text-align: center;">Full sea speed</td> <td></td> <td></td> <td></td> </tr> <tr> <td style="text-align: center;">Full ahead</td> <td></td> <td></td> <td></td> </tr> <tr> <td style="text-align: center;">Half ahead</td> <td></td> <td></td> <td></td> </tr> <tr> <td style="text-align: center;">Slow ahead</td> <td></td> <td></td> <td></td> </tr> <tr> <td style="text-align: center;">Dead slow ahead</td> <td></td> <td></td> <td></td> </tr> <tr> <td style="text-align: center;">Dead slow astern</td> <td></td> <td colspan="2">Critical revolutions _____ rpm Minimum rpm _____ knots</td> </tr> <tr> <td style="text-align: center;">Slow astern</td> <td></td> <td colspan="2">Time limit astern _____ min Time limit at min. revs _____ min</td> </tr> <tr> <td style="text-align: center;">Half astern</td> <td></td> <td colspan="2">Emergency full ahead to full astern _____ s Stop to full astern _____ s</td> </tr> <tr> <td style="text-align: center;">Full astern</td> <td></td> <td colspan="2">Astern power _____ % ahead Max. no. of consecutive starts _____</td> </tr> </table> | PROPULSION PARTICULARS | | | Type of engine _____ kW (____HP), Type of propeller _____ | | | Engine order | Rpm/pitch setting | Speed (knots) | | Loaded | Ballast | Full sea speed | | | | Full ahead | | | | Half ahead | | | | Slow ahead | | | | Dead slow ahead | | | | Dead slow astern | | Critical revolutions _____ rpm Minimum rpm _____ knots | | Slow astern | | Time limit astern _____ min Time limit at min. revs _____ min | | Half astern | | Emergency full ahead to full astern _____ s Stop to full astern _____ s | | Full astern | | Astern power _____ % ahead Max. no. of consecutive starts _____ | | <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th colspan="6" style="text-align: center;">THRUSTER EFFECT at trial conditions</th> </tr> <tr> <th style="text-align: center;">Thruster</th> <th style="text-align: center;">kW (HP)</th> <th style="text-align: center;">Time delay for full thrust</th> <th style="text-align: center;">Turning rate at zero speed</th> <th style="text-align: center;">Time delay to reverse full thrust</th> <th style="text-align: center;">Not effective above speed</th> </tr> <tr> <td style="text-align: center;">Bow</td> <td></td> <td style="text-align: center;">s</td> <td style="text-align: center;">°/min</td> <td style="text-align: center;">min s</td> <td style="text-align: center;">knots</td> </tr> <tr> <td style="text-align: center;">Stern</td> <td></td> <td style="text-align: center;">s</td> <td style="text-align: center;">°/min</td> <td style="text-align: center;">min s</td> <td style="text-align: center;">knots</td> </tr> <tr> <td style="text-align: center;">Combined</td> <td></td> <td style="text-align: center;">s</td> <td style="text-align: center;">°/min</td> <td style="text-align: center;">min s</td> <td style="text-align: center;">knots</td> </tr> </table> | THRUSTER EFFECT at trial conditions | | | | | | Thruster | kW (HP) | Time delay for full thrust | Turning rate at zero speed | Time delay to reverse full thrust | Not effective above speed | Bow | | s | °/min | min s | knots | Stern | | s | °/min | min s | knots | Combined | | s | °/min | min s | knots |
| PROPULSION PARTICULARS | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Type of engine _____ kW (____HP), Type of propeller _____ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Engine order | Rpm/pitch setting | Speed (knots) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Loaded | Ballast | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Full sea speed | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Full ahead | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Half ahead | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Slow ahead | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Dead slow ahead | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Dead slow astern | | Critical revolutions _____ rpm Minimum rpm _____ knots | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Slow astern | | Time limit astern _____ min Time limit at min. revs _____ min | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Half astern | | Emergency full ahead to full astern _____ s Stop to full astern _____ s | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Full astern | | Astern power _____ % ahead Max. no. of consecutive starts _____ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| THRUSTER EFFECT at trial conditions | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Thruster | kW (HP) | Time delay for full thrust | Turning rate at zero speed | Time delay to reverse full thrust | Not effective above speed | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Bow | | s | °/min | min s | knots | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Stern | | s | °/min | min s | knots | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Combined | | s | °/min | min s | knots | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th colspan="5" style="text-align: center;">DRAUGHT INCREASE (LOADED)</th> </tr> <tr> <th colspan="3" style="text-align: center;">Estimated Squat Effect</th> <th colspan="2" style="text-align: center;">Heel Effect</th> </tr> <tr> <th style="text-align: center;">Under keel clearance</th> <th style="text-align: center;">Ship's speed (knots)</th> <th style="text-align: center;">Max. bow squat estimated (m)</th> <th style="text-align: center;">Heel angle (degree)</th> <th style="text-align: center;">Draft increase (m)</th> </tr> <tr> <td></td> <td></td> <td></td> <td style="text-align: center;">2</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td style="text-align: center;">4</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td style="text-align: center;">8</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td style="text-align: center;">12</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td style="text-align: center;">16</td> <td></td> </tr> </table> | | | | DRAUGHT INCREASE (LOADED) | | | | | Estimated Squat Effect | | | Heel Effect | | Under keel clearance | Ship's speed (knots) | Max. bow squat estimated (m) | Heel angle (degree) | Draft increase (m) | | | | 2 | | | | | 4 | | | | | 8 | | | | | 12 | | | | | 16 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DRAUGHT INCREASE (LOADED) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Estimated Squat Effect | | | Heel Effect | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Under keel clearance | Ship's speed (knots) | Max. bow squat estimated (m) | Heel angle (degree) | Draft increase (m) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | 2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | 4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | 8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | 12 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | 16 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

FIG. 3 Wheelhouse Poster


LOADED Water depth/draught ratio = 1.2

BALLAST

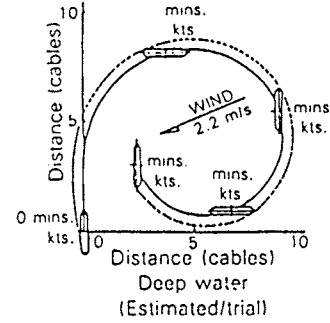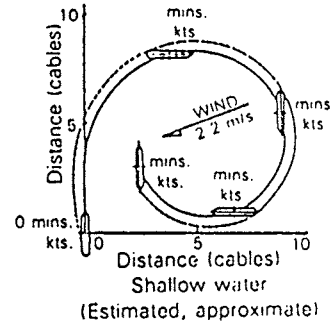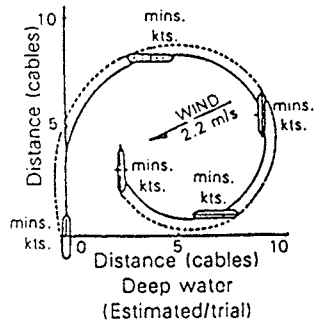


1 cable = 0.1 nautical mile

EMERGENCY MANOEUVRES

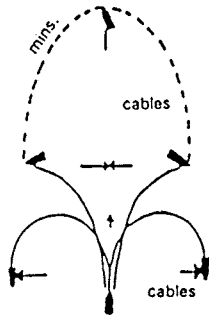


FULL SEA AHEAD
Comparison of turning (max. rudder) and full astern stopping ability (rudder amidships)

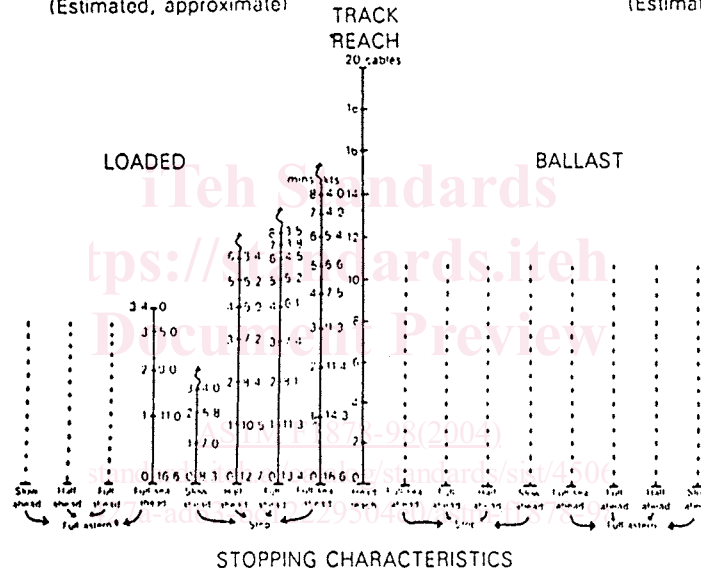




STOPPING CHARACTERISTICS

EMERGENCY MANOEUVRES

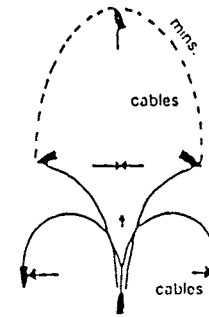

FULL SEA AHEAD
Comparison of turning (max. rudder) and full astern stopping ability (rudder amidship)

FIG. 4 Turning Circles at Maximum Rudder Angle

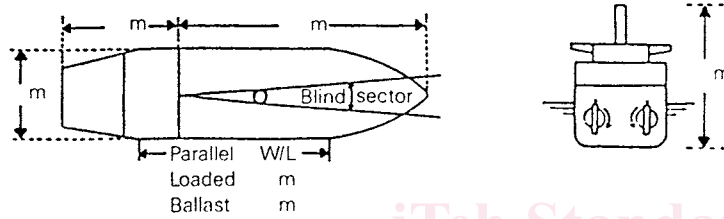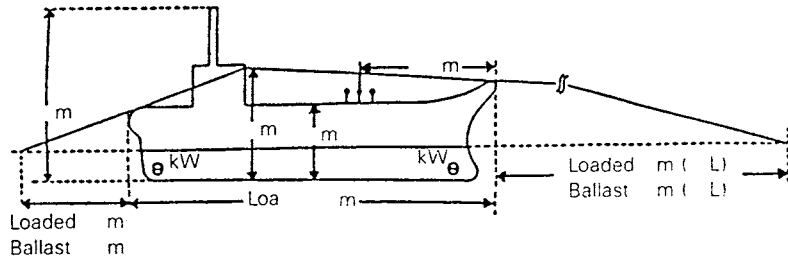

| MAN OVERBOARD RESCUE MANOEUVRE |
|---|
| SEQUENCE OF ACTIONS TO BE TAKEN. <ul style="list-style-type: none"> • TO CAST A LIFEBOUY • TO GIVE THE HELM ORDER • TO SOUND THE ALARM • TO KEEP THE LOOK-OUT |
| Insert a recommended turn |

Prepared by _____
Date _____

NOTE 1—Performance may differ from this record as a result of environmental, hull, and loading conditions.

FIG. 5 Man Overboard Rescue Maneuver

ASTM F1878-98(2004)
standards.iteh.ai/catalog/standards/sist/4506427a-ad63-bc12229504e0/astm-f1878-98

| | |
|--------------------|--|
| Escort vessel Name | |
| Type | |
| Owner | |
| Builder | |
| Year Built | |

| Basic Performance Data | |
|------------------------|--|
| Horsepower (BHP) | |
| Ahead Bollard Pull | |
| Astern Bollard Pull | |

| Hull Data | |
|-----------------------|--|
| LOA | |
| Beam (Main Deck) | |
| Draft (operating) | |
| Freeboard (operating) | |

| Engine Data | |
|-------------------|--|
| Make/Model: | |
| Number of Engines | |
| Maximum RPM | |

| Propeller Data | |
|-------------------------------|--|
| Propulsion Type | |
| Number of Shafts and Props | |
| Prop. Type (No. Blades, etc.) | |
| Prop. Diameter | |
| Prop. Pitch | |
| Nozzle (Type) | |
| Nozzle Diameter | |
| Nozzle Length | |

| Deck and Escort Equipment | |
|---------------------------|--|
| Tow winch (make/model) | |
| Winch brake capacity | |
| Quick release features | |
| Towline (type/size) | |
| Breaking strength | |
| Bow winches and lines | |
| Firefighting Equipment | |

| Rudder Data | |
|------------------------------------|--|
| Number of Rudders | |
| Rudder Shapes (flat, faired, etc.) | |
| Maximum Rudder Angles | |
| Flanking Rudders (yes/no) | |

FIG. 6 Escort Vessel Data Form

6.2.2 Example performance measures are presented in Appendix X1.

6.3 Operational Performance Measures:

6.3.1 Operational performance measures are ship, waterway, and season specific. An example of this type of performance measure is contained in 33 CFR 168.50 Part (a). It reads, in part: "... at all times during the escort transit each tanker to which this part applies: ... (2) Must have the escort vessels positioned relative to the tanker such that timely response to a propulsion or steering failure can be effected. (3) Must not exceed a speed beyond which the escort vessels can reasonably be expected to safely bring the tanker under control within the navigational limits of the waterway, taking into consideration ambient sea and weather conditions, surrounding vessel traffic, hazards, and other factors that may reduce the available sea room." An operational analysis needs to consider transit speed, time delays, sea and weather conditions, navigational constraints, failure modes, type of assistance used, ship fitting, and other factors.

6.3.2 The adequacy of the escort under this section can be demonstrated through computer simulations, model-scale or full-scale trials, or a combination of both.

6.3.3 *Failure Modes*—Failure modes for an operational analysis are to be defined. Possible failure modes include propulsion failure, steering failure, or steering failure without the use of ship propulsion. The escort requirements differ significantly, depending on the failure scenario.

6.3.4 *Time Delays*—Time delays for an operational analysis are to be defined. Actual time delays can vary significantly as a result of differences in human performance, weather conditions, nature of casualty, ship speed, escort vessel type, escort position, escort mode, emergency assist procedures, and equipment. The time delay chain of events should include each of the following, if applicable.

6.3.4.1 Time delay for failure recognition aboard the transiting ship (consideration can be given to on-board failure alarm systems),