INTERNATIONAL STANDARD



3774

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION •МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ •ORGANIZATION INTERNATIONALE DE NORMALISATION

Cinematography — 35 mm motion-picture film perforated 8 mm Type S (1-3-5-7-0 or 1-0) — Cutting and perforating dimensions

Cinématographie — Film cinématographique 35 mm perforé 8 mm, type S (1-3-5-7-0 ou 1-0) — Dimensions de coupe et de perforation

Descriptors: cinematography, motion-picture film 35 mm, motion-picture film 8 mm, specifications, perforating, cutting.

First edition — 1976-06-15

FOREWORD

ISO (the International Organization for Standardization) is a worldwide federation of national standards institutes (ISO Member Bodies). The work of developing International Standards is carried out through ISO Technical Committees. Every Member Body interested in a subject for which a Technical Committee has been set up has the right to be represented on that Committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the Technical Committees are circulated to the Member Bodies for approval before their acceptance as International Standards by the ISO Council.

International Standard ISO 3774 was drawn up by Technical Committee ISO/TC 36, Cinematography, and was circulated to the Member Bodies in March 1975.

It has been approved by the Member Bodies of the following countries:

Austria Belgium Italy Japan Sweden Switzerland

Canada

Korea, Rep. of

Turkey

Czechoslovakia

Mexico Netherlands United Kingdom U.S.A.

Denmark France

Romania South Africa, Rep. of U.S.S.R. Yugoslavia

Germany India

Spain

No Member Body expressed disapproval of the document.

Cinematography — 35 mm motion-picture film perforated 8 mm Type S (1-3-5-7-0 or 1-0) — Cutting and perforating dimensions

1 SCOPE AND FIELD OF APPLICATION

This International Standard specifies the cutting and perforating dimensions for 35 mm motion-picture raw stock either with five rows of perforations in positions 1-3-5-7-0 or with two rows of perforations in positions 1-0, as well as the width of the 8 mm strip after processing and slitting the print stock.

2 REFERENCES

ISO/R 129, Engineering drawing - Dimensioning.

ISO 543, Cinematography — Motion-picture safety film — Definition, testing and marking.

ISO 1700, Cinematography $-8\,\mathrm{mm}$ Type S motion-picture raw stock film - Cutting and perforating dimensions.

3 DIMENSIONS

The dimensions shall be as shown in the figures and given in the table.

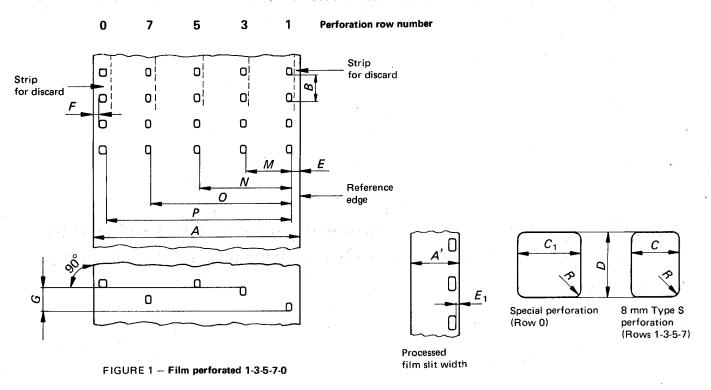


FIGURE 3 — Width of processed and slit film, and detail of perforations

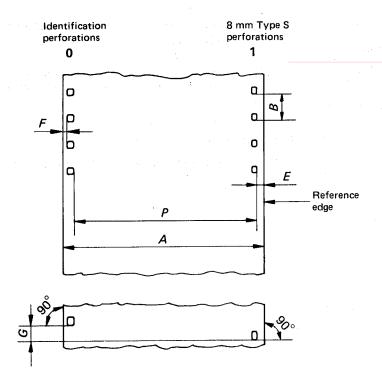


FIGURE 2 - Film perforated 1-0