
**Elektromagnetna združljivost in zadeve v zvezi z radijskim spektrom (ERM) -
Storitev kopenskih mobilnih komunikacij - Radijska oprema za prenos podatkov
(oziroma govora), ki uporablja modulacijo s konstantno ali nekonstantno ovojnico
in ima antenski priključek - 1. del: Tehnične karakteristike in merilne metode**

Electromagnetic compatibility and Radio spectrum Matters (ERM) - Land mobile service -
Radio equipment intended for the transmission of data (and/or speech) using constant or
non-constant envelope modulation and having an antenna connector - Part 1: Technical
characteristics and methods of measurement

(standards.iteh.ai)

[SIST EN 300 113-1 V1.7.1:2012](https://standards.iteh.ai/catalog/standards/sist/c2eb9966-35dd-46d2-aa13-21a0df7ee379/sist-en-300-113-1-v1-7-1-2012)

[https://standards.iteh.ai/catalog/standards/sist/c2eb9966-35dd-46d2-aa13-
21a0df7ee379/sist-en-300-113-1-v1-7-1-2012](https://standards.iteh.ai/catalog/standards/sist/c2eb9966-35dd-46d2-aa13-21a0df7ee379/sist-en-300-113-1-v1-7-1-2012)

Ta slovenski standard je istoveten z: EN 300 113-1 Version 1.7.1

ICS:

| | | |
|-----------|---|--|
| 33.060.99 | Druga oprema za radijske komunikacije | Other equipment for radiocommunications |
| 33.070.01 | Mobilni servisi na splošno | Mobile services in general |
| 33.100.01 | Elektromagnetna združljivost na splošno | Electromagnetic compatibility in general |

SIST EN 300 113-1 V1.7.1:2012 **en**

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 300 113-1 V1.7.1:2012](https://standards.iteh.ai/catalog/standards/sist/c2eb9966-35dd-46d2-aa13-21a0df7ee379/sist-en-300-113-1-v1-7-1-2012)

<https://standards.iteh.ai/catalog/standards/sist/c2eb9966-35dd-46d2-aa13-21a0df7ee379/sist-en-300-113-1-v1-7-1-2012>

ETSI EN 300 113-1 V1.7.1 (2011-11)



**Electromagnetic compatibility
and Radio spectrum Matters (ERM);
Land mobile service;
Radio equipment intended for the transmission
of data (and/or speech) using constant or non-constant
envelope modulation and having an antenna connector;
Part 1: Technical characteristics and
methods of measurement**

Reference

REN/ERM-TGDMR-296-1

Keywords

antenna, data, mobile, PMR, radio, speech**ETSI**

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 300 113-1 V1.7.1:2012

<https://standards.iteh.ai/catalog/standards/sist/c2eb9966-35dd-46d2-aa13-21a0df7ee372/sist-en-300-113-1-v1-7-1-2012>
Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

http://portal.etsi.org/chaicor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2011.
All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.
3GPP™ and **LTE™** are Trade Marks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.
GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Contents

| | |
|--|----|
| Intellectual Property Rights | 8 |
| Foreword..... | 8 |
| 1 Scope | 9 |
| 2 References | 9 |
| 2.1 Normative references | 9 |
| 2.2 Informative references..... | 10 |
| 3 Definitions, symbols and abbreviations | 10 |
| 3.1 Definitions..... | 10 |
| 3.2 Symbols..... | 11 |
| 3.3 Abbreviations | 12 |
| 4 General | 12 |
| 4.1 Presentation of equipment for testing purposes..... | 12 |
| 4.1.1 Choice of model for testing | 12 |
| 4.1.1.1 Auxiliary test equipment | 13 |
| 4.1.1.2 Declarations by the provider | 13 |
| 4.2 Mechanical and electrical design..... | 13 |
| 4.2.1 General..... | 13 |
| 4.2.2 Controls | 13 |
| 4.2.3 Transmitter shut-off facility..... | 13 |
| 4.3 Marking..... | 13 |
| 4.4 Testing using bit streams or messages..... | 13 |
| 4.5 Measuring continuous mode equipment..... | 13 |
| 4.6 Measuring discontinuous mode equipment..... | 14 |
| 4.7 Combined full bandwidth analogue speech/full bandwidth digital equipment..... | 14 |
| 4.8 Constant and non-constant envelope modulation..... | 15 |
| 5 Test conditions, power sources and ambient temperatures | 15 |
| 5.1 Normal and extreme test conditions | 15 |
| 5.2 Test power source..... | 15 |
| 5.3 Normal test conditions..... | 15 |
| 5.3.1 Normal temperature and humidity | 15 |
| 5.3.2 Normal test power source | 16 |
| 5.3.2.1 Mains voltage..... | 16 |
| 5.3.2.2 Regulated lead-acid battery power sources used on vehicles..... | 16 |
| 5.3.2.3 Other power sources..... | 16 |
| 5.4 Extreme test conditions | 16 |
| 5.4.1 Extreme temperatures | 16 |
| 5.4.2 Extreme test source voltages..... | 16 |
| 5.4.2.1 Mains voltage..... | 16 |
| 5.4.2.2 Regulated lead-acid battery power sources used on vehicles..... | 16 |
| 5.4.2.3 Power sources using other types of batteries..... | 16 |
| 5.4.2.4 Other power sources..... | 17 |
| 5.5 Procedure for tests at extreme temperatures..... | 17 |
| 5.5.1 Procedure for equipment designed for continuous transmission..... | 17 |
| 5.5.2 Procedure for equipment designed for intermittent transmission | 17 |
| 5.5.3 Testing of equipment that does not have an external 50 Ω RF connector (integral antenna equipment)..... | 17 |
| 6 General test conditions | 18 |
| 6.1 Arrangements for test signals applied to the receiver input..... | 18 |
| 6.2 Receiver mute or squelch facility | 18 |
| 6.3 Normal test signals (wanted and unwanted signals)..... | 18 |
| 6.3.1 Equipment measured as constant envelope angle modulation equipment | 18 |
| 6.3.2 Equipment measured as non-constant envelope modulation equipment..... | 19 |
| 6.4 Encoder for receiver measurements | 19 |

| | | |
|---------|--|----|
| 6.5 | Transceiver data interface..... | 20 |
| 6.6 | Impedance | 20 |
| 6.7 | Artificial antenna..... | 20 |
| 6.8 | Tests of equipment with a duplex filter | 20 |
| 6.9 | Facilities for access | 20 |
| 6.9.1 | Analogue access..... | 20 |
| 6.9.2 | Test points for bit stream measurements..... | 20 |
| 6.9.3 | Coupling arrangements | 21 |
| 6.9.3.1 | Arrangements for measurements with continuous bit streams..... | 21 |
| 6.9.3.2 | Arrangements for measurements with messages..... | 21 |
| 6.10 | Test site and general arrangements for measurements involving the use of radiated fields | 21 |
| 6.11 | Modes of operation of the transmitter for constant envelope equipment | 21 |
| 7 | Technical characteristics of the transmitter..... | 22 |
| 7.1 | Frequency error | 22 |
| 7.1.1 | Definition..... | 22 |
| 7.1.2 | Method of measurement | 22 |
| 7.1.3 | Limits..... | 22 |
| 7.2 | Transmitter power (conducted) | 23 |
| 7.2.1 | Definitions | 23 |
| 7.2.1.1 | Equipment measured as constant envelope angle modulation equipment..... | 23 |
| 7.2.1.2 | Equipment measured as non-constant envelope modulation equipment..... | 23 |
| 7.2.2 | Method of measurement | 23 |
| 7.2.2.1 | Equipment measured as constant envelope angle modulation equipment..... | 23 |
| 7.2.2.2 | Equipment measured as non-constant envelope modulation equipment..... | 24 |
| 7.2.3 | Limits..... | 24 |
| 7.3 | Maximum Effective radiated power | 24 |
| 7.3.1 | Definition..... | 24 |
| 7.3.1.1 | Equipment measured as constant envelope angle modulation equipment..... | 24 |
| 7.3.1.2 | Equipment measured as non-constant envelope modulation equipment..... | 25 |
| 7.3.2 | Methods of measurement..... | 25 |
| 7.3.2.1 | Equipment measured as constant envelope angle modulation equipment..... | 26 |
| 7.3.2.2 | Equipment measured as non-constant envelope modulation equipment..... | 27 |
| 7.3.3 | Limits..... | 28 |
| 7.4 | Adjacent channel power | 29 |
| 7.4.1 | Definition..... | 29 |
| 7.4.2 | Method of measurement | 29 |
| 7.4.3 | Limits..... | 30 |
| 7.5 | Unwanted emissions in the spurious domain..... | 31 |
| 7.5.1 | Definition..... | 31 |
| 7.5.2 | Method of measuring the power level | 31 |
| 7.5.2.1 | Equipment measured as constant envelope angle modulation equipment..... | 32 |
| 7.5.2.2 | Equipment measured as non-constant envelope modulation equipment..... | 32 |
| 7.5.3 | Method of measuring the effective radiated power..... | 32 |
| 7.5.3.1 | Equipment measured as constant envelope angle modulation equipment..... | 33 |
| 7.5.3.2 | Equipment measured as non-constant envelope modulation equipment..... | 33 |
| 7.5.4 | Limits..... | 35 |
| 7.6 | Intermodulation attenuation..... | 36 |
| 7.6.1 | Definition..... | 36 |
| 7.6.2 | Method of measurement | 36 |
| 7.6.3 | Limits..... | 37 |
| 7.7 | Transmitter attack time..... | 37 |
| 7.7.1 | Definition..... | 37 |
| 7.7.2 | Method of measurement | 38 |
| 7.7.3 | Limit | 38 |
| 7.8 | Transmitter release time | 38 |
| 7.8.1 | Definition..... | 38 |
| 7.8.2 | Method of measurement | 39 |
| 7.8.3 | Limits..... | 39 |
| 7.9 | Transient behaviour of the transmitter..... | 39 |
| 7.9.1 | Definitions | 39 |
| 7.9.2 | Timings, frequencies and powers | 41 |

| | | |
|-----------|--|----|
| 7.9.3 | Methods of measurement..... | 44 |
| 7.9.3.1 | Time domain measurements of power and frequency..... | 44 |
| 7.9.3.2 | Test arrangement and characteristics of the FM modulation meter..... | 45 |
| 7.9.3.3 | Adjacent channel transient power measurements..... | 45 |
| 7.9.3.3.1 | Definition..... | 45 |
| 7.9.3.3.2 | Measurement method for constant envelope angle modulation equipment..... | 45 |
| 7.9.3.3.3 | Measurement method for non-constant envelope modulation equipment..... | 46 |
| 7.9.3.3.4 | Alternative measurement method using a spectrum analyser..... | 47 |
| 7.9.3.4 | Characteristics of the adjacent channel transient power measuring device..... | 48 |
| 7.9.4 | Limits..... | 48 |
| 7.9.4.1 | Time domain analysis of power and frequency for constant envelope transmissions..... | 49 |
| 7.9.4.2 | Adjacent and alternate channel transient power..... | 49 |
| 7.9.4.2.1 | Equipment measured as constant envelope angle modulation equipment..... | 49 |
| 7.9.4.2.2 | Equipment measured as non-constant envelope modulation equipment..... | 49 |
| 8 | Methods of measurement for receiver parameters..... | 50 |
| 8.1 | Maximum usable sensitivity (conducted)..... | 50 |
| 8.1.1 | Definition..... | 50 |
| 8.1.2 | Method of measurement..... | 50 |
| 8.1.2.1 | Method of measurement with continuous bit streams..... | 50 |
| 8.1.2.2 | Method of measurement with messages..... | 51 |
| 8.1.2.3 | Method of measurement with packets..... | 51 |
| 8.1.3 | Limits..... | 52 |
| 8.2 | Average usable sensitivity (field strength)..... | 52 |
| 8.2.1 | Definition..... | 52 |
| 8.2.2 | Method of measurement..... | 52 |
| 8.2.3 | Limits..... | 53 |
| 8.3 | Level of the wanted signal for the degradation measurements..... | 53 |
| 8.4 | Error behaviour at high input levels..... | 54 |
| 8.4.1 | Definition..... | 54 |
| 8.4.2 | Method of measurement..... | 54 |
| 8.4.2.1 | Method of measurement with continuous bit streams..... | 54 |
| 8.4.2.2 | Method of measurement with messages..... | 54 |
| 8.4.2.3 | Method of measurement with packets..... | 55 |
| 8.4.3 | Limits..... | 55 |
| 8.5 | Co-channel rejection..... | 55 |
| 8.5.1 | Definition..... | 55 |
| 8.5.2 | Method of measurement..... | 56 |
| 8.5.2.1 | Method of measurement with continuous bit streams..... | 56 |
| 8.5.2.2 | Method of measurement with messages..... | 57 |
| 8.5.2.3 | Method of measurement with packets..... | 58 |
| 8.5.3 | Limits..... | 58 |
| 8.6 | Adjacent channel selectivity..... | 59 |
| 8.6.1 | Definition..... | 59 |
| 8.6.2 | Method of measurement..... | 59 |
| 8.6.2.1 | Method of measurement with continuous bit streams..... | 59 |
| 8.6.2.2 | Method of measurement with messages..... | 60 |
| 8.6.2.3 | Method of measurement with packets..... | 61 |
| 8.6.3 | Limits..... | 62 |
| 8.7 | Spurious response rejection..... | 62 |
| 8.7.1 | Definition..... | 62 |
| 8.7.2 | Introduction to the method of measurement..... | 62 |
| 8.7.3 | Method of search over the "limited frequency range"..... | 63 |
| 8.7.4 | Method of measurement with continuous bit streams..... | 64 |
| 8.7.5 | Method of measurement with messages..... | 64 |
| 8.7.6 | Method of measurement with packets..... | 65 |
| 8.7.7 | Limits..... | 66 |
| 8.8 | Intermodulation response rejection..... | 66 |
| 8.8.1 | Definition..... | 66 |
| 8.8.2 | Method of measurement..... | 67 |
| 8.8.2.1 | Method of measurement with continuous bit streams..... | 67 |
| 8.8.2.2 | Method of measurement with messages..... | 68 |

| | | |
|-------------------------------|--|-----------|
| 8.8.2.3 | Method of measurement with packets..... | 69 |
| 8.8.3 | Limits..... | 69 |
| 8.9 | Blocking or desensitization | 70 |
| 8.9.1 | Definition..... | 70 |
| 8.9.2 | Method of measurement | 70 |
| 8.9.2.1 | Method of measurement with continuous bit streams..... | 70 |
| 8.9.2.2 | Method of measurement with messages..... | 71 |
| 8.9.2.3 | Method of measurement with packets..... | 72 |
| 8.9.3 | Limits..... | 72 |
| 8.10 | Spurious radiations | 72 |
| 8.10.1 | Definition..... | 72 |
| 8.10.2 | Method of measuring the power level | 73 |
| 8.10.3 | Method of measuring the effective radiated power..... | 74 |
| 8.10.4 | Limits..... | 75 |
| 9 | Duplex operation | 76 |
| 9.1 | Receiver desensitization (with simultaneous transmission and reception)..... | 76 |
| 9.1.1 | Definition..... | 76 |
| 9.1.2 | Desensitization measured with continuous bit streams..... | 77 |
| 9.1.2.1 | Method of measurement when the equipment has a duplex filter..... | 77 |
| 9.1.2.2 | Method of measurement when the equipment has to operate with two antennas..... | 78 |
| 9.1.3 | Limits..... | 79 |
| 9.2 | Receiver spurious response rejection (with simultaneous transmission and reception) | 79 |
| 9.2.1 | Definition..... | 79 |
| 9.2.2 | Method of measurement | 79 |
| 9.2.3 | Limits..... | 81 |
| 10 | Measurement uncertainty | 81 |
| ITech STANDARD PREVIEW | | |
| (standards.itech.ai) | | |
| Annex A (normative): | Radiated measurement..... | 83 |
| A.1 | Test sites and general arrangements for measurements involving the use of radiated fields..... | 83 |
| A.1.1 | Anechoic chamber..... | 83 |
| A.1.2 | Anechoic chamber with a conductive ground plane..... | 84 |
| A.1.3 | Open Area Test Site (OATS)..... | 85 |
| A.1.4 | Test antenna..... | 86 |
| A.1.5 | Substitution antenna | 87 |
| A.1.6 | Measuring antenna | 87 |
| A.2 | Guidance on the use of radiation test sites | 87 |
| A.2.1 | Verification of the test site | 87 |
| A.2.2 | Preparation of the EUT..... | 87 |
| A.2.3 | Power supplies to the EUT | 87 |
| A.2.4 | Volume control setting for analogue speech tests | 88 |
| A.2.5 | Range length..... | 88 |
| A.2.6 | Site preparation | 89 |
| A.3 | Coupling of signals..... | 89 |
| A.3.1 | General | 89 |
| A.3.2 | Data Signals..... | 89 |
| A.3.3 | Speech and analogue signals | 89 |
| A.3.3.1 | Acoustic coupler description..... | 90 |
| A.3.3.2 | Calibration | 90 |
| Annex B (normative): | Specification for some particular measurement arrangements..... | 91 |
| B.1 | Power measuring receiver specification..... | 91 |
| B.1.1 | IF filter | 91 |
| B.1.2 | Attenuation indicator..... | 92 |
| B.1.3 | RMS value indicator..... | 92 |
| B.1.4 | Oscillator and amplifier..... | 92 |
| B.2 | Spectrum analyser specification..... | 93 |
| B.3 | Integrating and power summing device | 93 |

| | | |
|-------------------------------|--------------------------|-----------|
| Annex C (informative): | Bibliography..... | 94 |
| History | | 95 |

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 300 113-1 V1.7.1:2012

<https://standards.iteh.ai/catalog/standards/sist/c2eb9966-35dd-46d2-aa13-21a0df7ee379/sist-en-300-113-1-v1-7-1-2012>

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://ipr.etsi.org>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (EN) has been produced by ETSI Technical Committee Electromagnetic compatibility and Radio spectrum Matters (ERM).

The present document is part 1 of a multi-part deliverable covering the Electromagnetic compatibility and Radio spectrum Matters (ERM); Land mobile service; Radio equipment intended for the transmission of data (and/or speech) using constant or non-constant envelope modulation and having an antenna connector, as identified below:

Part 1: "Technical characteristics and methods of measurement";

Part 2: "Harmonized EN covering the essential requirements of article 3.2 of the R&TTE Directive".

ITEH STANDARD PREVIEW
(standards.iteh.ai)

National transposition dates

| | | |
|--|---|------------------|
| Date of adoption of this EN: | SIST EN 300 113-1 V1.7.1:2012 | 21 November 2011 |
| Date of latest announcement of this EN (doa): | https://standards.iteh.ai/catalog/standards/sist/c2eb9966-35dd-46d2-aa13-21a0d1ee379/sist-en-300-113-1-v1-7-1-2012 | 29 February 2012 |
| Date of latest publication of new National Standard or endorsement of this EN (dop/e): | | 31 August 2012 |
| Date of withdrawal of any conflicting National Standard (dow): | | 31 August 2012 |

1 Scope

The present document covers the technical requirements for radio transmitters and receivers used in stations in the Private Mobile Radio (PMR) service.

It applies to use in the land mobile service, operating on radio frequencies between 30 MHz and 1 GHz, with channel separations of 12,5 kHz, 20 kHz and 25 kHz, intended for speech and/or data.

Table 1: Radiocommunications service frequency bands

| | Radiocommunications service frequency bands |
|----------|--|
| Transmit | 30 MHz to 1 000 MHz |
| Receive | 30 MHz to 1 000 MHz |

It applies to equipment for continuous and/or discontinuous transmission of data and/or digital speech.

The equipment comprises a transmitter and associated encoder and modulator and/or a receiver and associated demodulator and decoder. The types of equipment covered by the present document are as follows:

- base station (equipment fitted with an antenna connector, intended for use in a fixed location);
- mobile station (equipment fitted with an antenna connector, normally used in a vehicle or as a transportable); and
- those handportable stations:
 - a) fitted with an antenna connector; or
 - b) without an external antenna connector, but fitted with a permanent internal or a temporary internal 50 Ω Radio Frequency (RF) connector which allows access to the transmitter output and the receiver input.

Handportable equipment without an external or internal RF connector and without the possibility of having a temporary internal 50 Ω RF connector is not covered by the present document.

2 References

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the reference document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication ETSI cannot guarantee their long term validity.

2.1 Normative references

The following referenced documents are necessary for the application of the present document.

- [1] ETSI EN 300 086-1 (V1.4.1): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Land Mobile Service; Radio equipment with an internal or external RF connector intended primarily for analogue speech; Part 1: Technical characteristics and methods of measurement".
- [2] ETSI EN 300 390-1 (V1.2.1): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Land Mobile Service; Radio equipment intended for the transmission of data (and speech) and using an integral antenna; Part 1: Technical characteristics and test conditions".

- [3] ETSI TR 100 028 (V1.4.1) (all parts): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics".
- [4] ITU-T Recommendation O.153: "Basic parameters for the measurement of error performance at bit rates below the primary rate".
- [5] ANSI C63.5-2006: "American National Standard for Calibration of Antennas Used for Radiated Emission Measurements in Electro Magnetic Interference".
- [6] IEC 60489-3 (1988): "Methods of measurement for radio equipment used in the mobile services. Part 3: Receivers for A3E or F3E emissions".
- [7] CEPT/ERC/REC 74-01E: "Unwanted emissions in the spurious domain" (Siófok 1998, Nice 1999, Sesimbra 2002, Hradec Kralove 2005).
- [8] ETSI EN 300 793 (V1.1.1): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Land mobile service; Presentation of equipment for type testing".

2.2 Informative references

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] ETSI TR 102 273 (V1.2.1) (all parts): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Improvement on Radiated Methods of Measurement (using test site) and evaluation of the corresponding measurement uncertainties".

iTeh STANDARD PREVIEW

3 Definitions, symbols and abbreviations

3.1 Definitions

SIST EN 300 113-1 V1.7.1:2012

<https://standards.iteh.ai/catalog/standards/sist/c2eb9966-35dd-46d2-aa13-21a0df7ee379/sist-en-300-113-1-v1-7-1-2012>

For the purposes of the present document, the following terms and definitions apply:

50 Ω : 50 ohm non-reactive impedance

adjacent channels: channel offset from the wanted channel by the channel spacing (see figure 1)

alternate channels: two channels offset from the wanted channel by double the channel spacing (see figure 1)

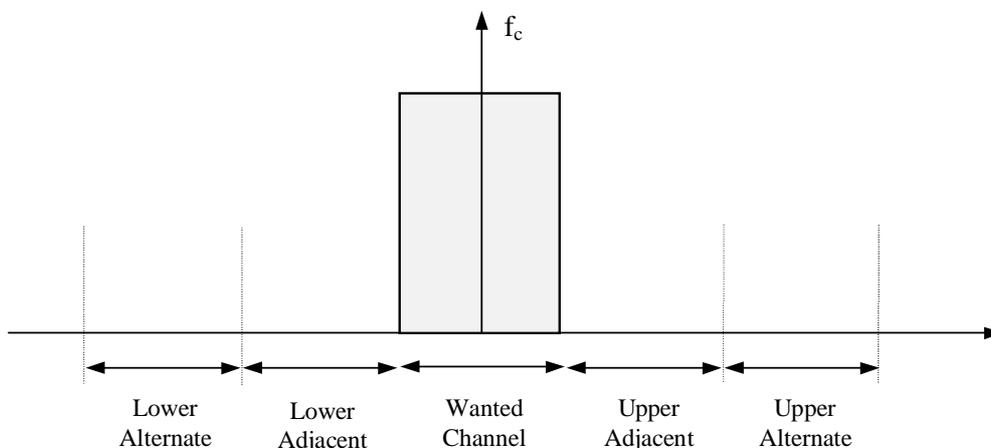


Figure 1: Adjacent and alternate channel definitions

angle modulation: either phase modulation or frequency modulation

base station: equipment fitted with an antenna connector, for use with an external antenna, and intended for use in a fixed location

bit: binary digit

block: the smallest quantity of information that is sent over the radio channel

NOTE: A constant number of useful bits are always sent together with the corresponding redundancy bits.

burst or transmission (physical): one or several packets transmitted between power on and power off of a particular transmitter

conducted measurements: measurements which are made using direct 50 Ω connection to the equipment under test

data transmission systems: systems which transmit and/or receive data and/or digitized voice

handportable station: equipment either fitted with an antenna connector or integral antenna, or both, normally used on a stand-alone basis, to be carried on a person or held in the hand

integral antenna: antenna designed to be connected to the equipment without the use of a 50 Ω external connector and considered to be part of the equipment

NOTE: An integral antenna may be fitted internally or externally to the equipment.

Listen Before Transmit mode (LBT): monitoring mode in which the RF channel is checked for activity before transmitting

message: user data to be transferred in one or more packets in a session

mobile station: mobile equipment fitted with an antenna connector, for use with an external antenna, normally used in a vehicle or as a transportable station

packet: one block or a contiguous stream of blocks sent by one (logical) transmitter to one particular receiver or one particular group of receivers

Peak Envelope Power (PEP): mean power delivered to the artificial antenna during a radio frequency cycle at the highest crest of the modulation envelope

radiated measurements: measurements which involve the absolute measurement of a radiated field

session: set of inter-related exchange of packets occupying one or several windows or part thereof (if applicable)

NOTE: corresponds to a complete interactive procedure for interchanging data between users, comprising initiation, data transmission and termination procedures. The session can be short (e.g. 2 packets), or long (e.g. one full page of text).

switching range: maximum frequency range, as specified by the manufacturer, over which the receiver or the transmitter can be operated within the alignment range without reprogramming or realignment

window: set of inter-related transmissions which may be limited in time by an appropriate access protocol and corresponding occupation rules

3.2 Symbols

For the purposes of the present document, the following symbols apply:

D-M0, D-M1, etc. names of signals defined in clause 6.3.1

The symbols used in the clauses relating to transients and timings can be found in clause 7.9.1.

| | |
|----------|--|
| f_{I1} | 1 st intermediate frequency |
| f_{I2} | 2 nd intermediate frequency |
| f_{In} | n th intermediate frequency |

| | |
|-----------|--|
| f_l | frequency of the limited frequency range |
| f_{LO} | Local oscillator frequency |
| T_{max} | Maximum extreme test temperature |
| T_{min} | Minimum extreme test temperature |
| V_{max} | Maximum extreme test voltage |
| V_{min} | Minimum extreme test voltage |

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

| | |
|-------|--|
| CBW | Channel BandWidth |
| CSP | Channel SeParation |
| CW | Continuous Wave |
| dB | decibel |
| dBc | decibels relative to the carrier power |
| dBm | dB relative to 1 mW in 50 ohms |
| emf | electromotive force |
| EUT | Equipment Under Test |
| FM | Frequency Modulation |
| FSK | Frequency Shift Keying |
| GMSK | Gaussian Minimum Shift Keying |
| IF | Intermediate Frequency |
| OATS | Open Area Test Site |
| PEP | Peak Envelope Power |
| PLL | Phase Locked Loop |
| PMR | Private Mobile Radio |
| RF | Radio Frequency |
| rms | root mean square |
| Rx | Receiver |
| SINAD | Signal, Noise And Distortion |
| sr | switching range |
| Tx | Transmitter |
| VSWR | Voltage Standing Wave Ratio |

4 General

4.1 Presentation of equipment for testing purposes

Each equipment to be tested shall fulfil the requirements of the present document on all frequencies over which it is intended to operate.

The provider or manufacturer shall declare the frequency ranges, the range of operating conditions and power requirements as applicable, to establish the appropriate test conditions.

Additionally, technical documentation and operating manuals, sufficient to make the test, shall be supplied.

Guidance on the presentation of equipment is also given in EN 300 793 [8].

4.1.1 Choice of model for testing

The provider or manufacturer shall provide one or more samples of the equipment, as appropriate for testing.

Stand-alone equipment shall be complete with any ancillary equipment needed for testing.

If an equipment has several optional features, considered not to affect the RF parameters then the tests need only to be performed on the equipment configured with the combination of features considered to be the most complex.

Where practicable, equipment to be tested shall provide a 50 Ω connector for conducted RF power level measurements.

In the case of integral antenna equipment, if the equipment does not have an internal permanent 50 Ω connector then it is permissible to supply a second sample of the equipment with a temporary antenna connector fitted to facilitate testing.

The performance of the equipment to be tested shall be representative of the performance of the corresponding production model.

4.1.1.1 Auxiliary test equipment

All necessary test signal sources, setting up instructions and other product information shall accompany the equipment to be tested.

4.1.1.2 Declarations by the provider

The provider or manufacturer shall declare the necessary information of the equipment with respect to all technical requirements set by the present document.

4.2 Mechanical and electrical design

4.2.1 General

The equipment shall be designed, constructed and manufactured in accordance with good engineering practice, and with the aim of minimizing harmful interference to other equipment and services.

4.2.2 Controls

Those controls, which if maladjusted, might increase the interfering potentialities of the equipment shall not be accessible for adjustment by the user.

4.2.3 Transmitter shut-off facility

When a timer for an automatic shut-off facility is operative, at the moment of the time-out the transmitter shall automatically be switched off (the re-activation of the transmitter shall reset the timer).

A shut-off facility shall be inoperative for the duration of the measurements unless it has to remain operative to protect the equipment. If the shut-off facility is left operative the status of the equipment shall be indicated.

4.3 Marking

The equipment shall be marked in a visible place. This marking shall be legible, tamperproof and durable.

The marking shall be in accordance with EC Directives and/or CEPT decisions or recommendations as appropriate.

4.4 Testing using bit streams or messages

The manufacturer may elect to have the equipment tested using bit streams or messages. It should be noted that the methods of measurement using messages are usually more time consuming.

4.5 Measuring continuous mode equipment

In the case of measurements performed on equipment designed to operate only in continuous mode, requirements such as "equipment shall be set in continuous mode" shall be interpreted as "equipment shall be used in its normal transmission mode (in this case, the continuous mode)".