



Technical Specification

**Intelligent Transport Systems (ITS);
Testing;
Conformance test specifications for GeoNetworking ITS-G5;
Part 2: Test Suite Structure and Test Purposes (TSS & TP)**

STANDARDS PREVIEW
iteh.com
https://standards.iteh.ai/catalog/standards/sist/5e9bfcfa-8925-4e5a-b886-2d4431118066/etsi-ts-102-871-2-v1.2.1-2014-04

Reference

RTS/ITS-0030023

Keywords

ITS, NETWORK, Testing, TSS&TP

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

http://portal.etsi.org/chaicor/ETSI_support.asp

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2014.

All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are Trade Marks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Contents

Intellectual Property Rights	5
Foreword.....	5
1 Scope	6
2 References	6
2.1 Normative references	6
2.2 Informative references.....	6
3 Definitions and abbreviations.....	7
3.1 Definitions.....	7
3.2 Abbreviations	7
4 Test Configuration.....	8
4.1 Test Configuration Overview	8
4.2 Configuration 1: CF01.....	9
4.3 Configuration 2: CF02.....	9
4.4 Configuration 3: CF03.....	10
4.5 Configuration 4: CF04.....	11
4.6 Configuration 5: CF05.....	12
4.7 Configuration 6: CF06.....	13
4.8 Configuration 7: CF07.....	14
5 Test Suite Structure (TSS).....	15
5.1 Structure for GEONW tests.....	15
5.2 Test groups	15
5.2.1 Root	15
5.2.2 Test group	15
5.2.3 Test sub-group	15
5.2.4 Categories	15
6 Test Purposes (TP)	16
6.1 Introduction	16
6.1.1 TP definition conventions.....	16
6.1.2 TP Identifier naming conventions.....	16
6.1.3 Rules for the behaviour description	17
6.1.4 Sources of TP definitions.....	17
6.1.5 Mnemonics for PICS reference.....	17
6.2 Test purposes for GEONW	18
6.2.1 Formatting and Data Validity	18
6.2.1.1 Basic Header	18
6.2.1.2 Common Header	19
6.2.1.3 Beacon.....	21
6.2.1.4 GeoUnicast.....	23
6.2.1.5 GeoBroadcast	23
6.2.1.6 GeoAnycast.....	24
6.2.1.7 Single-Hop Broadcast	24
6.2.1.8 Topologically Scoped Broadcast.....	25
6.2.2 Protocol Operation.....	26
6.2.2.1 Location table.....	26
6.2.2.2 Local Position Vector.....	31
6.2.2.3 Sequence Number	31
6.2.2.4 Location Service	32
6.2.2.5 Forwarding Packet Buffer.....	39
6.2.2.6 GeoNetworking Address.....	46
6.2.2.7 Beaconsing.....	47
6.2.2.8 GeoUnicast.....	48
6.2.2.9 GeoBroadcast.....	54
6.2.2.10 Topologically Scoped Broadcast.....	63

6.2.2.11	Single-Hop Broadcast	67
6.2.2.12	GeoAnycast	68
6.2.2.13	GeoBroadcast CBF Algorithm	74
6.2.2.14	GeoBroadcast Advanced Algorithm	79
6.2.3	Buffer Capacities	84
6.2.3.1	Location Service	84
6.2.3.2	Forwarding Packet Buffer	85
Annex A (informative):	Bibliography	87
History		88

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Full standard:
<https://standards.iteh.ai/catalog/standards/sist/5e9bcfea-8925-4e5a-b886-2d4431118be6/etsi-ts-102-871-2-v1.2.1-2014-04>

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://ipr.etsi.org>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI Technical Committee Intelligent Transport Systems (ITS).

The present document is part 2 of a multi-part deliverable covering Conformance test specification for GeoNetworking ITS-G5 as identified below:

- Part 1: "Test requirements and Protocol Implementation Conformance Statement (PICS) proforma";
- Part 2: "Test Suite Structure and Test Purposes (TSS & TP)";**
- Part 3: "Abstract Test Suite (ATS) and Protocol Implementation eXtra Information for Testing (PIXIT)".

1 Scope

The present document provides the Test Suite Structure and Test Purposes (TSS & TP) for GeoNetworking ITS-G5 as defined in EN 302 636-4-1 [1] in compliance with the relevant requirements and in accordance with the relevant guidance given in ISO/IEC 9646-7 [6].

The ISO standard for the methodology of conformance testing (ISO/IEC 9646-1 [3] and ISO/IEC 9646-2 [4]) as well as the ETSI rules for conformance testing (ETS 300 406 [7]) are used as a basis for the test methodology.

2 References

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

2.1 Normative references

The following referenced documents are necessary for the application of the present document.

- [1] ETSI EN 302 636-4-1 (V1.2.0): "Intelligent Transport Systems (ITS); Vehicular Communications; GeoNetworking; Part 4: Geographical addressing and forwarding for point-to-point and point-to-multipoint communications; Sub-part 1: Media-Independent Functionality".
- [2] ETSI TS 102 871-1 (V1.2.1): "Intelligent Transport Systems (ITS); Testing; Conformance test specifications for GeoNetworking ITS-G5; Part 1: Test requirements and Protocol Implementation Conformance Statement (PICS) proforma";
- [3] ISO/IEC 9646-1 (1994): "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 1: General concepts".
- [4] ISO/IEC 9646-2 (1994): "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 2: Abstract Test Suite specification".
- [5] Void.
- [6] ISO/IEC 9646-7 (1995): "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 7: Implementation Conformance Statements".
- [7] ETSI ETS 300 406 (1995): "Methods for testing and Specification (MTS); Protocol and profile conformance testing specifications; Standardization methodology".

2.2 Informative references

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] ETSI EG 202 798 (V1.1.1): "Intelligent Transport Systems (ITS); Testing; Framework for conformance and interoperability testing".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in EN 302 636-4-1 [1], ISO/IEC 9646-1 [3], ISO/IEC 9646-7 [6] and the following apply:

ItsNode: node that implements GeoAdhoc router functionality by EN 302 636-4-1 [1]

neighbour: ItsNode is in direct (single-hop) communication range

"to be in direction of X": to be a valid candidate for a forwarding algorithm to forward the packet to the destination X

NOTE: This means that the candidate ItsNode is geographically closer to X than the IUT.

to broadcast a packet: to send a packet as a link-layer broadcast frame to all surrounding neighbours

to forward a packet: to send a packet as a link-layer unicast frame to the selected node

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:




BAA	GeoBroadcast Advanced Algorithm
BAH	Basic Header
BC	Broadcast
BCA	GeoBroadcast CBF Algorithm
BEA	Beacon
BI	Invalid Behaviour
BV	Valid Behaviour
CAP	Buffer Capacities
CBF	Contention Based Forwarding
COH	Common Header
DEPV	DEstination Position Vector
FDV	Formatting and Data Validity
FPB	Forwarding Packet Buffer
GAC	Geographically-Scoped Anycast
GBC	Geographically-Scoped Broadcast
GEONW	GeoNetworking
GNA	GeoNetworking Address
GUC	Geographically-Scoped Unicast
HL	Hop Limit
HST	Header Subtype
HT	Header Type
ICS	Implementation Conformance Statement
ITS	Intelligent Transportation Systems
ITS-G5	5 GHz wireless communication
IUT	Implementation Under Test
LOS	Location Service
LPV	Local Position Vector
LS	Location Service
LT	Lifetime
LT/TIC	Transmission Interval Control
MAC	Medium Access Control
MHL	Maximum Hop Limit
MIB	Management Information Base
NH	Next Header
PAI	Position Accuracy Indicator
PDU	Protocol Data Unit
PL	Payload Length

PON	Protocol Operation
PV	Position Vector
RHL	Remaining Hop Limit
SAP	Service Access Point
SCC	Station Country Code
SCF	Store Carry & Forward
SEPV	SEnder Position Vector
SHB	Single Hop Broadcast
SN	Sequence Number
SOPV	SOurce Position Vector
SQN	Sequence Number
ST	Station Type
SUT	System Under Test
TH	Threshold
TP	Test Purposes
TSB	Topologically-Scoped Broadcast
TSS	Test Suite Structure
TST	Timestamp
UC	Unicast

4 Test Configuration

4.1 Test Configuration Overview

This clause introduces the test configurations that have been used for the definition of test purposes. The test configurations cover the various scenarios of the GeoNetworking tests. The test configurations show:

-  green ItsNode: ItsNode is in the communication range of the IUT.
-  red ItsNode: ItsNode is not in the communication range of the IUT.
-  dashed rectangle: definition of a specific geographical area (see note).

NOTE: A geographical area is defined in the GeoBroadcast or GeoAnycast packet by HST field of Common Header and GeoAreaPos Latitude, GeoAreaPos Longitude, DistanceA, DistanceB and Angle fields of the Extended Header.

Seven test configurations are defined below.

4.2 Configuration 1: CF01

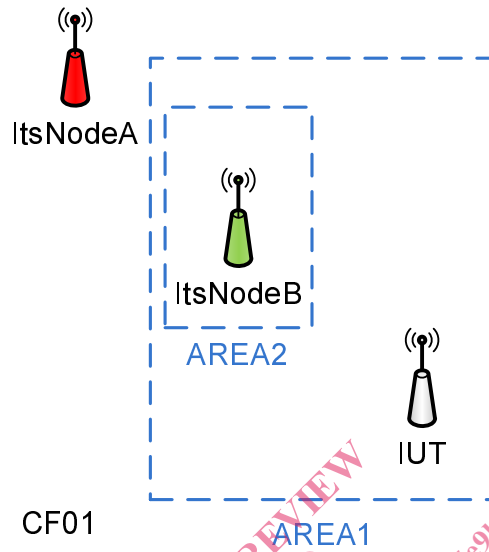


Figure 1

ItsNodeA	is not in IUT's communication range
ItsNodeB	is in IUT's communication range is in direction of ItsNodeA is in AREA1 is in AREA2
IUT	is in AREA1

4.3 Configuration 2: CF02

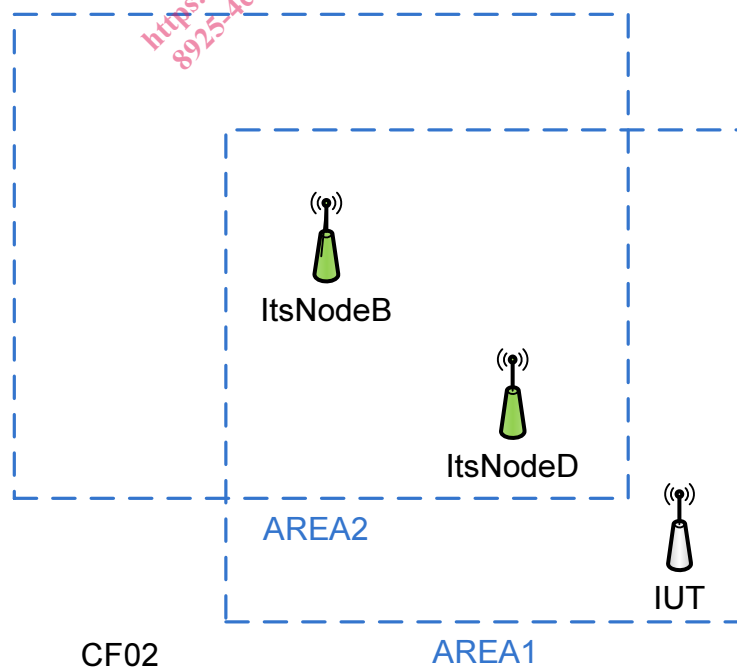


Figure 2

ItsNodeB	is in IUT's communication range is close to the centre of AREA2 is in AREA1 is in AREA2
ItsNodeD	is in IUT's communication range is in direction of ItsNodeB is in AREA1 is in AREA2
IUT	is in AREA1

4.4 Configuration 3: CF03

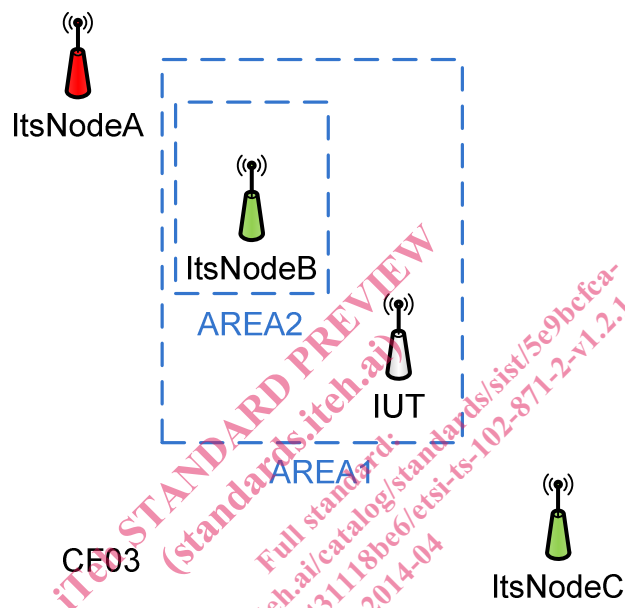


Figure 3

ItsNodeA	is not in IUT's communication range
ItsNodeB	is in IUT's communication range is in direction of ItsNodeA is in AREA1 is in AREA2
ItsNodeC	is in IUT's communication range is not in direction of ItsNodeA
IUT	is in AREA1

4.5 Configuration 4: CF04

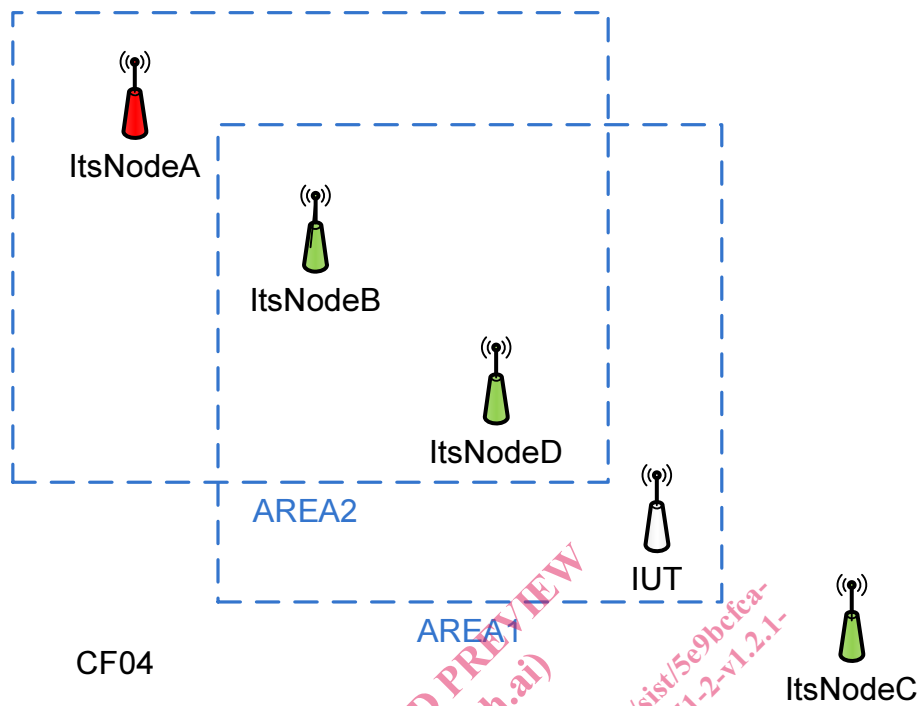


Figure 4

ItsNodeA	is not in IUT's communication range
ItsNodeB	is in IUT's communication range is in direction of ItsNodeA is closer to ItsNodeA than ItsNodeD is in AREA1 is in AREA2. is close to the centre of AREA2
ItsNodeC	is in IUT's communication range is not in direction of ItsNodeA
ItsNodeD	is in IUT's communication range is in direction of ItsNodeA is in AREA1 is in AREA2
IUT	is in AREA1

4.6 Configuration 5: CF05

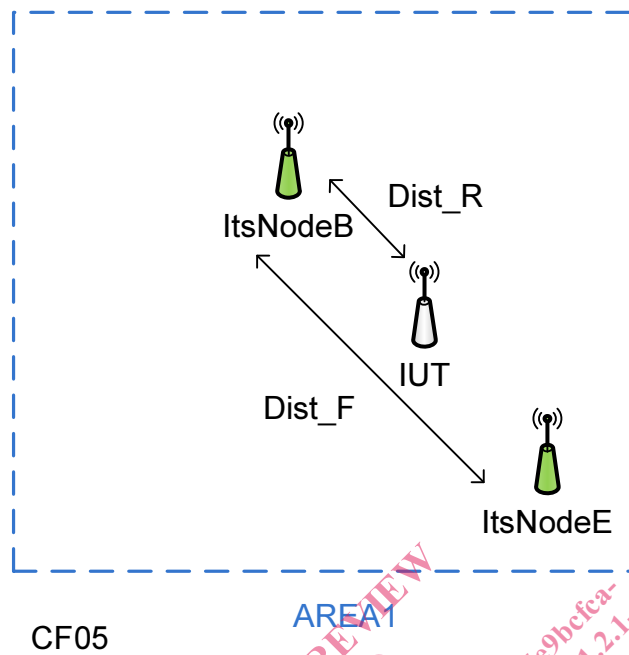


Figure 5

ItsNodeB	is in IUT's communication range is in AREA1 is close to the centre of AREA1
ItsNodeE	is in IUT's communication range is in AREA1
IUT	is in AREA1 is closer to ItsNodeB than ItsNodeE ($\text{Dist_R} < \text{Dist_F}$) Angle FSR formed by ItsNodeE, ItsNodeB and IUT is less than Angle_TH

4.7 Configuration 6: CF06

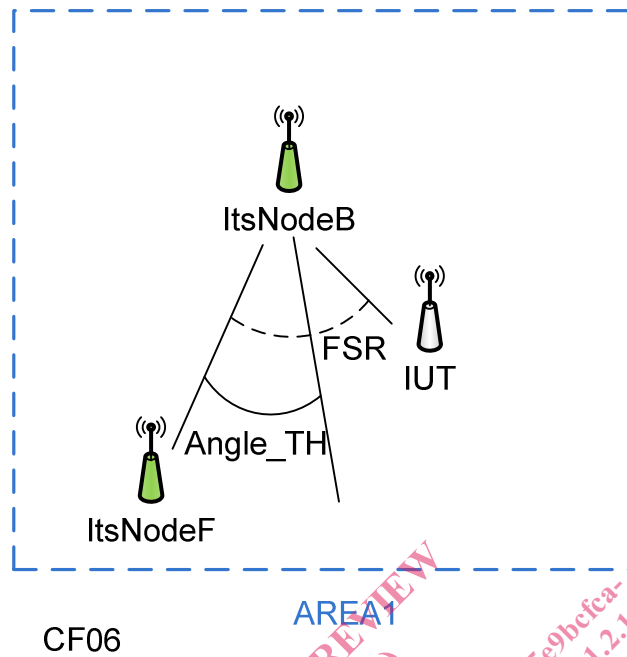


Figure 6

ItsNodeB	is in IUT's communication range is in AREA1 is close to the centre of AREA1
ItsNodeF	is in IUT's communication range is in AREA1
IUT	is in AREA1 is closer to ItsNodeB than ItsNodeE ($Dist_R < Dist_F$) Angle FSR formed by ItsNodeF, ItsNodeB and IUT is greater than Angle_TH