



SLOVENSKI STANDARD

SIST ES 203 069 V1.1.1:2014

01-junij-2014

Dostop, priključki, prenos in multipleksiranje (ATTM) - Daljinsko upravljanje opreme pri naročniku (CPE) prek širokopasovnih omrežij - Protokol za upravljanje prostranega omrežja opreme pri naročniku (CWMP)

Access, Terminals, Transmission and Multiplexing (ATTM) - Remote management of CPE over broadband networks - CPE WAN Management Protocol (CWMP)

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ES 203 069 V1.1.1:2014](https://standards.iteh.ai/catalog/standards/sist/9cc63d81-054d-4cf3-ad16-705c85044ad8/sist-es-203-069-v1-1-1-2014)

Ta slovenski standard je istoveten z: **ES 203 069 Version 1.1.1**

ICS:

33.060.40 Kabelski razdelilni sistemi Cabled distribution systems

SIST ES 203 069 V1.1.1:2014 **en**

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ES 203 069 V1.1.1:2014](https://standards.iteh.ai/catalog/standards/sist/9cc63d81-054d-4cf3-ad16-7b3c85044aa8/sist-es-203-069-v1-1-1-2014)

<https://standards.iteh.ai/catalog/standards/sist/9cc63d81-054d-4cf3-ad16-7b3c85044aa8/sist-es-203-069-v1-1-1-2014>

ETSI ES 203 069 V1.1.1 (2011-03)

ETSI Standard

**Access, Terminals, Transmission and Multiplexing (ATTM);
Remote management of CPE over broadband networks;
CPE WAN Management Protocol (CWMP)**

**iTeh STANDARD PREVIEW
(standards.iteh.ai)**

[SIST ES 203 069 V1.1.1:2014](https://standards.iteh.ai/catalog/standards/sist/9cc63d81-054d-4cf3-ad16-7b3c85044aa8/sist-es-203-069-v1-1-1-2014)

<https://standards.iteh.ai/catalog/standards/sist/9cc63d81-054d-4cf3-ad16-7b3c85044aa8/sist-es-203-069-v1-1-1-2014>



Reference

DES/ATTM-02012

Keywords

configuration, management, xDSL**ETSI**

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ES 203 069 V1.1.1:2014<https://standards.iteh.ai/catalog/standards/sist/9cc63d81-054d-4cf3-ad16-7b3c8504477d/sist-203-069-v1-1-1-2014>**Important notice**

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

http://portal.etsi.org/chaicor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2011.
All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™**, **TIPHON™**, the TIPHON logo and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.

3GPP™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

LTE™ is a Trade Mark of ETSI currently being registered

for the benefit of its Members and of the 3GPP Organizational Partners.

GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Contents

Intellectual Property Rights	4
Foreword.....	4
Introduction	4
1 Scope	5
2 References	6
2.1 Normative references	6
2.2 Informative references.....	7
3 Definitions and abbreviations.....	7
3.1 Definitions.....	7
3.2 Abbreviations	8
4 Conventions.....	8
5 Remote management of CPE over broadband networks	8
5.1 Elements of the CPE WAN management protocol.....	8
5.1.1 TR-069: CPE WAN management protocol (CWMP).....	8
5.1.2 Auto-configuration and dynamic service provisioning.....	9
5.1.3 Software/firmware image management	9
5.1.4 Status and performance monitoring	9
5.1.5 Diagnostics	9
5.1.6 Security	9
5.2 Data models.....	10
5.2.1 TR-181 Issue 2: Device data model for TR-069.....	10
5.2.2 TR-157: Component objects for CWMP	11
5.2.3 TR-143: Enabling network throughput performance tests and statistical monitoring.....	11
5.2.4 TR-104: DSL Home provisioning parameters for VoIP CPE.....	11
5.2.5 TR-135: Data model for a TR-069 enabled set-top box.....	11
5.2.6 TR-140: TR-069 data model for storage service enabled devices	11
5.2.7 TR-196: Femto access point service data model.....	12
Annex A (informative): Bibliography.....	13
History	14

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This ETSI Standard (ES) has been produced by ETSI Technical Committee Access, Terminals, Transmission and Multiplexing (ATTM).

Introduction

The basis of the present document is the Broadband Forum CPE WAN management protocol (CWMP), commonly referred to as TR-069 [1].

The protocol is intended for communication between a CPE and an Auto-Configuration Server (ACS). The CPE WAN management protocol defines a mechanism that encompasses secure auto-configuration of a CPE, and also incorporates other CPE management functions into a common framework.

TR-069 [1] specifies the generic requirements of the management protocol, and methods that can be applied to any TR-069 [1] CPE. Other Broadband Forum Technical Reports (TRs) specify the managed objects, or data models, for specific types of devices or services.

The protocol may be used to manage various types of CPE, including stand-alone routers and LAN-side client devices. It is agnostic to the specific access medium utilized by the service provider, although it does depend on IP-layer connectivity having first been established by the device.

1 Scope

The present document defines the requirements for the remote management of networked devices by a service provider in a consumer's home. It provides an overview of and the necessary normative references to a family of technical specifications (see figure 1). It describes how the various technical specifications in this family are related.

The protocol is intended to provide flexibility in the connectivity model:

- The protocol allows both CPE and ACS initiated connection establishment, avoiding the need for a persistent connection to be maintained between each CPE and an ACS.
- The functional interactions between the ACS and CPE should be independent of which end initiated the establishment of the connection. In particular, even where ACS initiated connectivity is not supported, all ACS initiated transactions should be able to take place over a connection initiated by the CPE.
- The protocol allows one or more ACSs to serve a population of CPE. Each CPE can only be associated with one ACS, while each ACS may be associated with one or more service providers. However, a single physical device may present more than one logical CPE device, each of which may be associated with a different ACS.
- The protocol provides mechanisms for a CPE to discover the appropriate ACS for a given service provider.
- The protocol provides mechanisms to allow an ACS to securely identify a CPE and associate it with a user/customer.

Processes to support such association support models that incorporate user interaction as well as those that are fully automatic.


The protocol allows an ACS to control and monitor various parameters associated with a CPE. The mechanisms provided to access these parameters are designed with the following premises:

- Different CPE may have differing capability levels, implementing different subsets of optional functionality. Additionally, an ACS may manage a range of different device types delivering a range of different services. As a result, an ACS must be able to discover the capabilities of a particular CPE.
- An ACS must be able to control and monitor the current configuration of a CPE.
- Other entities besides an ACS may be able to control some parameters of a CPE's configuration (e.g. via LAN-side auto-configuration). As a result, the protocol must allow an ACS to account for external changes to a CPE's configuration. The ACS should also be able to control which configuration parameters can be controlled via means other than by the ACS.
- The protocol should allow vendor-specific parameters to be defined and accessed.

The protocol is intended to minimize implementation complexity, while providing flexibility in trading off complexity vs. functionality. The protocol incorporates a number of optional components that come into play only if specific functionality is required. The protocol incorporates existing standards where appropriate, allowing leverage of off-the-shelf implementations.

The protocol is agnostic to the underlying access network.

The protocol is also extensible. It includes mechanisms to support future extensions to the standard, as well as explicit mechanisms for vendor-specific extensions.

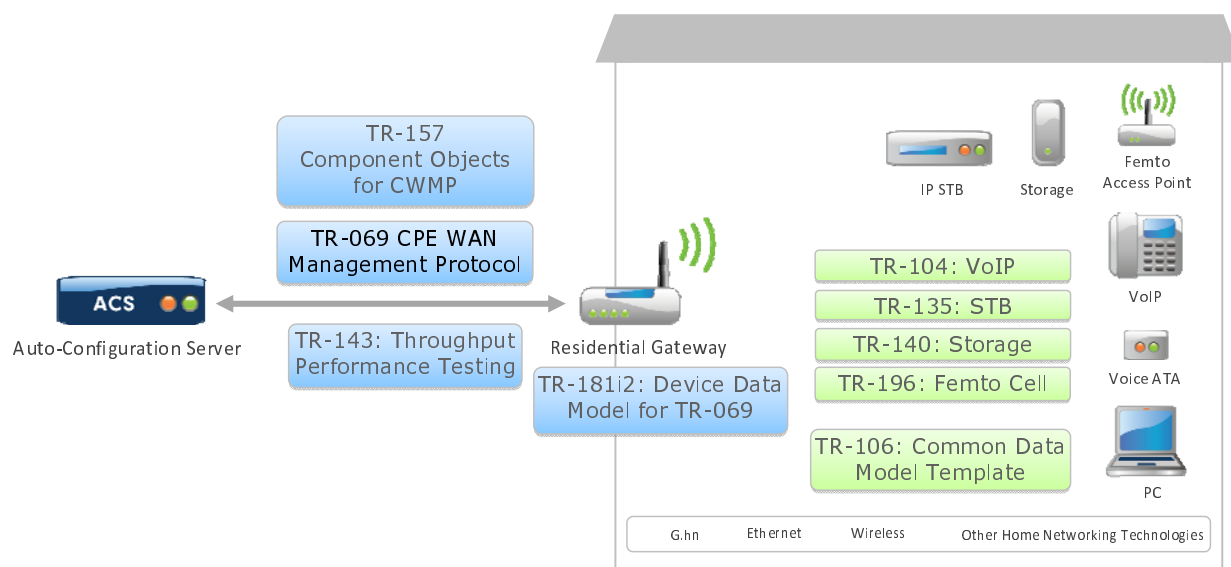

Technical Reports for CWMP and Data Models (see clauses 6.1 and 6.2) are coloured blue.
 Technical Reports that define Service Data Models (see clause 6.2.1) are coloured green.

Figure 1: CPE WAN management protocol and its related technical specifications

2 References

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the reference document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>

NOTE: While any hyperlinks included in this clause were valid at the time of publication ETSI cannot guarantee their long term validity.

2.1 Normative references

The following referenced documents are necessary for the application of the present document.

- [1] Broadband Forum TR-069 (Amendment 2 - December 2007): "CPE WAN Management Protocol (CWMP) v1.1".

NOTE: Available at http://www.broadband-forum.org/technical/download/TR-069_Amendment-2.pdf.

- [2] Broadband Forum TR-104 (September 2005): "DSLHome™ Provisioning Parameters for VoIP CPE".

NOTE: Available at <http://www.broadband-forum.org/technical/download/TR-104.pdf>.

- [3] Broadband Forum TR-106 (Amendment 4 - February 2010): "Data Model Template for TR-069-Enabled Devices".

NOTE: Available at http://www.broadband-forum.org/technical/download/TR-106_Amendment-4.pdf.

- [4] Broadband Forum TR-135 (December 2007): "Data Model for a TR-069 Enabled STB".

NOTE: Available at <http://www.broadband-forum.org/technical/download/TR-135.pdf>.

- [5] Broadband Forum TR-140 (Issue 1.1 - December 2007): "TR-069 Data Model for Storage Service Enabled Device".
- NOTE: Available at http://www.broadband-forum.org/technical/download/TR-140_Issue1.1.pdf.
- [6] Broadband Forum TR-143 (Corrigendum 1 - December 2008): "Enabling Network Throughput Performance Tests and Statistical Monitoring".
- NOTE: Available at http://www.broadband-forum.org/technical/download/TR-143_Corrigendum-1.pdf.
- [7] Broadband Forum TR-157 (Amendment 1 - September 2009): "Component Objects for CWMP".
- NOTE: Available at http://www.broadband-forum.org/technical/download/TR-157_Amendment-1.pdf.
- [8] Broadband Forum TR-181 (Issue 2 - May 2010): "Device Data Model for TR-069".
- NOTE: Available at http://www.broadband-forum.org/technical/download/TR-181_Issue-2.pdf.
- [9] Broadband Forum TR-196 (April 2009): "Femto Access Point Service Data Model".
- NOTE: Available at <http://www.broadband-forum.org/technical/download/TR-196.pdf>.
- [10] ITU-T Recommendation Y.101 (2000): "Global Information Infrastructure terminology: Terms and definitions".
- [11] Broadband Forum Technical Report Approval Process.
- NOTE: Available at <http://www.broadbandforum.org/about/download/trapprovalprocess.pdf>.
- [12] Broadband Forum TR-181 (Issue 1 - February 2010): "Device Data Model TR-069" (superseded by BBF TR-181 Issue 2).
- NOTE: Available at http://www.broadband-forum.org/technical/download/TR-181_Issue-1.pdf.
- [13] Broadband Forum TR-098 (Amendment 2 - September 2008): "Internet Gateway Device Data Model for TR-069" (superseded by BBF TR-181 Issue 2).
- NOTE: Available at http://www.broadband-forum.org/technical/download/TR-098_Amendment-2.pdf.

2.2 Informative references

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

Not applicable.

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in ITU-T Recommendation Y.101 [10], [11] and the following apply:

Customer Premises Equipment (CPE): end use system including private network elements connecting the customer applications to the access line

remote management: management of CPE over a WAN by a service provider

Technical Report (TR): approved technical specification of the Broadband Forum [11]