



SLOVENSKI STANDARD
SIST EN 15312:2007+A1:2010
01-december-2010

Prosto dostopna večnamenska športna oprema - Zahteve, vključno z varnostjo, in preskusne metode (vključno z dopolnilom A1)

Free access multi-sports equipment - Requirements, including safety and test methods

Frei zugängliche Multisportgeräte - Anforderungen, einschließlich Sicherheit und Prüfverfahren

iTeh STANDARD PREVIEW

Equipements sportifs en accès libre - Exigences, y compris de sécurité et méthodes d'essai

[SIST EN 15312:2007+A1:2010](https://standards.iteh.ai/catalog/standards/sist/c7925215-f20e-4d78-b5ad-1d72100c2470/sist-en-15312-2007/a1-2010)

Ta slovenski standard je istoveten z: EN 15312:2007+A1:2010

ICS:

97.220.40	Oprema za športe na prostem in vodne športe	Outdoor and water sports equipment
-----------	---	------------------------------------

SIST EN 15312:2007+A1:2010 **en,fr,de**

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 15312:2007+A1:2010

<https://standards.iteh.ai/catalog/standards/sist/c7925215-f20e-4d78-b5ad-fd72f00c2470/sist-en-15312-2007a1-2010>

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

EN 15312:2007+A1

September 2010

ICS 97.220.40

Supersedes EN 15312:2007

English Version

Free access multi-sports equipment - Requirements, including safety and test methods

Equipements sportifs en accès libre - Exigences, y compris de sécurité et méthodes d'essai

Frei zugängliche Multisportgeräte – Anforderungen, einschließlich Sicherheit und Prüfverfahren

This European Standard was approved by CEN on 23 December 2006 and includes Amendment 1 approved by CEN on 30 July 2010.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

[SIST EN 15312:2007+A1:2010](https://standards.iteh.ai/catalog/standards/sist/c7925215-f20e-4d78-b5ad-fd72f00c2470/sist-en-15312-2007a1-2010)

<https://standards.iteh.ai/catalog/standards/sist/c7925215-f20e-4d78-b5ad-fd72f00c2470/sist-en-15312-2007a1-2010>



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents

Page

Foreword.....	4
1 Scope	5
2 Normative references	5
3 Terms and definitions	6
4 General requirements.....	6
4.1 Materials	6
4.2 Structural integrity.....	7
4.3 Finish of equipment.....	8
4.4 Entrapment	9
4.4.1 Moving parts.....	9
4.4.2 Protection against entrapment.....	9
4.5 Protection against injuries due to movement.....	10
4.6 Connections	12
4.7 Consumable components (parts of wear and tear).....	12
4.8 Wire ropes	12
4.9 Chains	12
4.10 Foundations	13
4.11 Accessibility.....	13
4.12 Removable elements	13
5 Specific requirements.....	13
5.1 General.....	13
5.2 Basketball equipment.....	13
5.2.1 Requirements	13
5.2.2 Safety requirements	19
5.3 Goals	20
5.3.1 General.....	20
5.3.2 Structural stability and integrity.....	21
5.4 Nets and net fixings.....	21
5.4.1 Nets	21
5.4.2 Net fixings.....	21
5.5 Multi-sports surround and ball stop screen	21
5.5.1 Multi-sports surround	21
5.5.2 Ball stop screen	22
5.6 Multi-function central nets and posts.....	22
5.7 Table tennis tables.....	22
6 Test methods.....	23
6.1 General test methods	23
6.2 Test methods specific to basketball equipment.....	23
6.2.1 Ring	23
6.2.2 Net	24
6.2.3 Rigidity	24
6.2.4 Stability	24
7 Test report	26
8 Information for users.....	26
9 Marking	26
10 Information provided by the supplier and/or the manufacturer	26
Annex A (normative) Loads	27
A.1 Permanent loads	27
A.1.1 General.....	27
A.1.2 Self weight	27
A.1.3 Prestressing loads.....	27
A.1.4 Mass of water	27

A.2	Variable loads	27
A.2.1	General	27
A.2.2	User loads	28
A.2.3	Snow loads	30
A.2.4	Wind loads	30
A.2.5	Temperature loads	30
A.2.6	Seats: Specific loads	30
A.3	Numbers of users on the equipment	31
A.3.1	General	31
A.3.2	Number of users on a point	31
A.3.3	Number of users on line type elements	31
A.3.4	Number of users on an area	31
Annex B	(normative) Method of calculation of structural integrity	33
B.1	General principles: Limit state	33
B.1.1	Limit state	33
B.1.2	Ultimate limit state	33
B.1.3	Serviceability limit state	34
B.2	Load combinations for static analysis	34
B.3	Worked example of the calculation of user loads (without safety factors) for a surround/barrier	34
Annex C	(normative) Physical testing of structural integrity	36
C.1	Pass/fail criteria	36
C.1.1	Load carrying ability	36
C.1.2	Failure	36
C.2	Test load for equipment	36
C.2.1	Load combinations for testing	36
C.2.2	Safety factor for tests on identical series	36
C.2.3	Safety factor for tests on a unique product	37
C.3	Load application	37
C.3.1	Point loads	37
C.3.2	Line loads	37
C.3.3	Area loads	37
Annex D	(normative) Test methods for entrapment	38
D.1	A1 General	38
D.2	Finger entrapment	38
D.2.1	Apparatus	38
D.2.2	Procedure	39
D.3	Head and neck entrapment	39
D.3.1	Completely bound openings	39
D.3.2	Partially bound and V-shaped openings A1	41
Annex E	(normative) Information to be provided by the supplier and/or manufacturer	48
E.1	Information provided by the manufacturer of equipment	48
E.1.1	General product information	48
E.1.2	Pre information	48
E.1.3	Installation information	48
E.1.4	Inspection and maintenance information	49
Annex F	(normative) Test methods for resistance surround	51
F.1	Testing repeated impact resistance to footballs and kicks	51
F.2	A1 Impact resistance (very intense forceful kick from player) A1	52
	Bibliography	53

EN 15312:2007+A1:2010 (E)**Foreword**

This document (EN 15312:2007+A1:2010) has been prepared by Technical Committee CEN/TC 136 ^{A1} "Sports, playground and other recreational facilities and equipment" ^{A1}, the secretariat of which is held by DIN.

This document shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by March 2011 and conflicting national standards shall be withdrawn at the latest by March 2011.

This document includes Amendment 1, approved by CEN on 2010-07-30.

This document supersedes EN 15312:2007.

The start and finish of text introduced or altered by amendment is indicated in the text by tags ^{A1} ^{A1}.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 15312:2007+A1:2010](https://standards.iteh.ai/catalog/standards/sist/c7925215-f20e-4d78-b5ad-fd72f00c2470/sist-en-15312-2007a1-2010)

<https://standards.iteh.ai/catalog/standards/sist/c7925215-f20e-4d78-b5ad-fd72f00c2470/sist-en-15312-2007a1-2010>

1 Scope

This European Standard is applicable to free access multi-sports equipment and combinations intended for permanent installation (not temporary), which includes, but not exclusively, equipment for sports such as badminton, basketball, football, handball, hockey, table tennis, tennis, volleyball.

This European Standard specifies requirements, including safety, for the equipment itself as well as for its installation, inspection and maintenance. This European Standard is applicable to multi-sports equipment intended for individual and collective public use primarily by children and teenagers.

This type of equipment is not intended for use by very young children, e.g. less than 36 months.

This European Standard is not applicable to playground equipment as defined in EN 1176-1, free access facilities used for roller sports equipment (see EN 14974), fitness trails, artificial climbing structures (see [A1](#) EN 12572-1, EN 12572-2 and EN 12572-3 [A1](#)).

This European Standard does not deal with beach equipment, the ground surfaces the local environment and any feature outside the multi-sports equipment.

This European Standard does not include any specific requirements other than for access and egress for disabled users.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

- [SIST EN 15312:2007+A1:2010](https://www.sist.org.uk/catalog/standards/sist/c7925215-f20e-4d78-b5ad-fd72f00c2470/sist-en-15312-2007a1-2010)
- [A1](#) EN 636, *Plywood — Specifications* [A1](#) <https://www.sist.org.uk/catalog/standards/sist/c7925215-f20e-4d78-b5ad-fd72f00c2470/sist-en-15312-2007a1-2010>
- [A1](#) EN 1176-1:2008 [A1](#), *Playground equipment and surfacing — Part 1: General safety requirements and test methods*
- EN 1271, *Playing field equipment — Volleyball equipment — Functional and safety requirements, test methods*
- EN 1991-1-3, *Eurocode 1 — Actions on structures — Part 1-3: General actions — Snow loads*
- EN 1991-1-4, *Eurocode 1: Actions on structures — Part 2-4: General actions — Wind actions*
- EN 1991-1-5, *Eurocode 1: Actions on structures — Part 1-5: General actions — Thermal actions*
- [A1](#) *deleted text* [A1](#)
- EN ISO 1806, *Fishing nets — Determination of mesh breaking force of netting (ISO 1806:2002)*
- EN ISO 2062, *Textiles — Yarns from packages — [A1](#) Determination of single-end breaking force and elongation at break using constant rate of extension (CRE) tester (ISO 2062:2009) [A1](#)*
- EN ISO 2307, *Fibre ropes — Determination of certain physical and mechanical properties (ISO 2307:2005)*
- ISO 8793, *Steel wire ropes — Ferrule secured eye terminations*

EN 15312:2007+A1:2010 (E)**3 Terms and definitions**

For the purposes of this document, the following terms and definitions apply.

3.1 free access multi-sports equipment
equipment with which it is possible to practice one or more-sports where the access to the facilities is neither regulated nor necessarily supervised

3.2 goal
defined opening or area which forms the target for ball games, usually comprising two uprights and one crossbar

NOTE The net is optional.

3.3 basketball equipment
equipment comprising the following components: one backboard-one ring; the supporting frame; stability devices

NOTE The net is optional.

3.4 multi-sports surround
element surrounding the area where ball games are played and which is designed to limit the motion of the user and/or the area of play

NOTE A multi-sports surround is e.g. a fence or a ball rebound wall; ball games are e.g. hockey, football.

3.5 ball stop-screen
flexible or rigid fence or screen for restricting a ball from going in a specific direction

NOTE It is important that the location of the area of play accounts for the risks of balls leaving it. If the area of play is located next to a road, a ball stop screen may minimize the risk of players having to recover the ball from the road. It is equally important that other activities (e.g. playground area, artificial climbing structure) are protected from ball impact.

4 General requirements**4.1 Materials**

Materials $\boxed{A_1}$ shall $\boxed{A_1}$ be selected and protected such that the structural integrity of the equipment manufactured from them is not affected before the next relevant maintenance inspection.

NOTE The provisions relating to certain materials in this European Standard do not imply that other equivalent materials are unsuitable in the manufacture of multi-sports equipment.

The selection of materials and their use should be in accordance with the appropriate European Standards where applicable.

Particular care should be taken in the choice of materials where equipment is to be used in extreme climatic or atmospheric conditions.

Where very low or very high temperatures can be anticipated care should be taken with material selection to avoid possible hazards through direct skin contact.

$\boxed{A_1}$ In the choice of a material or substance for equipment, consideration should be given to the eventual disposal of the material or substance having regard to any possible environmental toxic hazard. $\boxed{A_1}$

A1 NOTE Information on the identification and classification of such substances can be found in the Directive 67/548/EEC (classification, packaging and labelling of dangerous substances) [10] as well as in the Regulation (EC) no.1907/2006 of the European Parliament and of the Council of 18 December 2006 concerning the Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH) [11]. **A1**

4.2 Structural integrity

Structural integrity of the equipment, including stability, shall be assessed by one of the following unless otherwise stated in Clause 5:

- a) calculation, carried out in accordance with Annexes A and B,
- b) physical testing, in accordance with Annex C, or
- c) a combination selected from either a) or b).

When calculations are carried out in accordance with Annex B, no limit states shall be exceeded at combinations of loads as given in B.2.

When tested in accordance with Annex C, the equipment shall not show any cracks, damage or excessive permanent deformation.

For some equipment, these specific calculations or tests are not always appropriate, but the structural integrity shall be at least equivalent.

For a family of products, the structural integrity for the worst case of the intended combinations shall be proved.


Each structure shall resist both the permanent and variable loads acting on equipment and parts of equipment as described in Annex C.

NOTE 1 No allowance for accidental loads, i.e. loads produced by fire, collision by vehicles or earthquake, need to be made for multi-sports equipment.

NOTE 2 The loads associated with fatigue are in general much smaller than the loads in combination with the appropriate load factors when calculated according to B.2. Therefore, the equipment does not need to be verified for fatigue, in general.

Structural parts shall resist the worst case loading condition.

NOTE 3 In order to achieve this, it can be necessary to remove that part of the user load causing favourable effects, as shown in Figure 1.

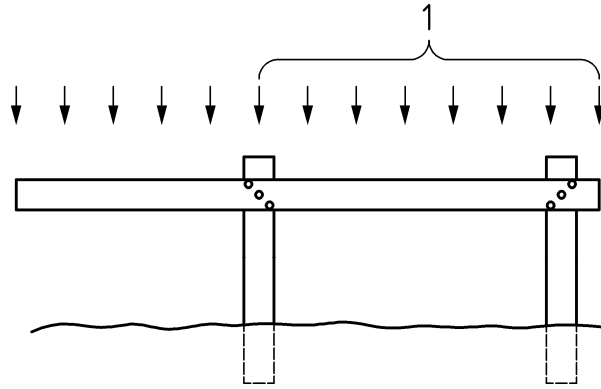**Key**

1 part of the load to be removed because of favourable effects

Figure 1 — Example of removal of that part of the user load which causes a favourable effect

4.3 Finish of equipment

Wooden equipment shall be made of wood with a low susceptibility to splintering. The surface finish of equipment made of other materials (e.g. glass fibre) shall be non-splintering.

Rough surfaces should not present any risk of injury.

There shall be no protruding nails, projecting wire, rope terminations or pointed or hard and sharp-edged parts within any accessible part of the equipment. Corners, edges and projecting parts within any accessible part of the equipment that project more than 8 mm, and which are not shielded by adjacent areas that are not more than 25 mm from the end of the projecting part, shall be rounded off. The minimum radius of the curve shall be 3 mm.

<https://standards.iteh.ai/catalog/standards/sist/c7925215-f20e-4d78-b5ad-518074170e97/EN-15312-2007+A1-2010>

Protruding bolt threads within any accessible part of the equipment shall be permanently covered, e.g. dome-headed nuts. Nuts and bolt heads that project less than 8 mm shall be free from burrs. All welds shall be ground smooth.

NOTE Figure 2 shows examples of protection for nuts and bolts.

Dimensions in millimetres

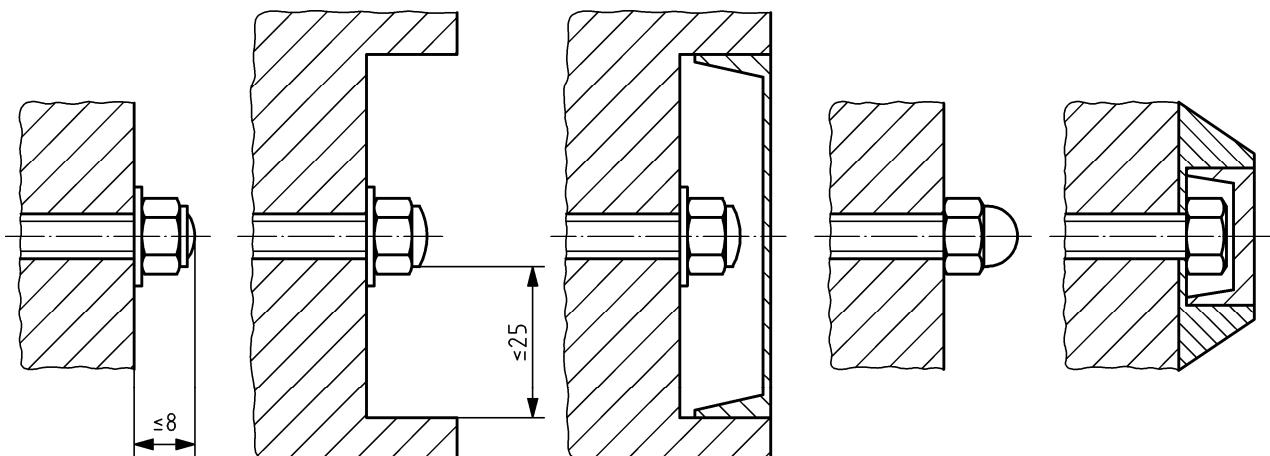


Figure 2 — Examples of protection for nuts and bolts

4.4 Entrapment

4.4.1 Moving parts

There shall be no crushing points or shearing points between moving and/or stationary parts of the equipment in accordance with 4.4.2.

4.4.2 Protection against entrapment

4.4.2.1 Entrapment of the head and neck

4.4.2.1.1 General

Equipment shall be constructed so that any openings do not create head and neck entrapment hazards either by head first or feet first passage. Hazardous situations in which this type of entrapment can be encountered include the following:

- a) completely bound openings through which a user may slide feet first or head first,
- b) partially bound or V-shaped openings and
- c) other openings (e.g. shearing or moving openings).

4.4.2.1.2 Completely bound openings

Accessible completely bound openings with a lower edge more than 600 mm above ground shall be tested in accordance with D.3.1

Small probes n°1 and n°2 shall not pass through any opening unless it also allows the passage of large probe n°3.

Non-rigid parts (e.g. ropes) shall not overlap if this creates apertures that are not in accordance with the above.

4.4.2.1.3 Partially bound and V-shaped openings

Partially bound and V-shaped openings with an entrance at 600 mm or more above the ground shall be constructed so that either:

- a) the opening is not accessible when tested in accordance with D.3.2, or
- b) if accessible at a position of 600 mm or more above ground when tested in accordance with D.3.2,

depending on the angular orientation range of the opening (see Figure D6a), shall comply with the following:

- Range 1: (template centre line $\pm 45^\circ$ from vertical); the template apex contacts the base of the opening and the depth of the opening is less than the length of the template to the underside of the shoulder section.
- A_1 Range 2: (template centre line from horizontal to $+ 45^\circ$); when the template apex contacts the base of the opening, the depth of the opening shall be less than the 'A' portion of the template. If the depth of the opening is greater than the 'A' portion of the template all parts of the opening above the 'A' portion shall also allow insertion of the shoulder section of the template or probe n°3. A_1
- Range 3: no template test requirements.

EN 15312:2007+A1:2010 (E)

4.4.2.2 Entrapment of finger

Ⓐ Equipment should be constructed so that the following hazardous situations, which might cause entrapment are not created: Ⓐ

- Ⓐ gaps in which fingers can be trapped whilst the remainder of the body is moving or continues in forced movement, Ⓐ
- open-ended tubes or pipes, and
- variable gaps (excluding chains).

Ⓐ deleted text Ⓐ

Openings and holes which have a lower edge more than Ⓐ 1 000 mm Ⓐ above the playing surface, when tested in accordance with D.2, shall conform to the following requirements:

- the 8 mm finger rod (see Figure D.1) shall not pass through the minimum cross-section of the opening and the profile of the opening shall be such that the rod cannot be locked in any position when set in motion as given in D.2.2, or
- if the 8 mm finger rod passes through the opening, the 25 mm finger rod (see Figure D.1) shall also pass through the opening, provided that the opening does not permit access to another finger entrapment site.

The ends of tubes and pipes shall be closed off to prevent the risk of finger entrapment.

The closures shall not be removable without using tools.

Gaps whose dimensions change during use of the equipment shall have a minimum dimension in any position of 18 mm.

SIST EN 15312:2007+A1:2010

<https://standards.iteh.ai/catalog/standards/sist/c7925215-f20e-4d78-b5ad-15312-2007a1-2010>

4.5 Protection against injuries due to movement

The space in, on or around the equipment that can be occupied by the user shall not contain any obstacles that the user is not likely to expect and which could cause injuries if hit by the user (see Figure 3). Examples of expected obstacles, such as anti-cycle bars (which may be removable to allow wheel chair access), are excluded from this requirement (see Figure 4).



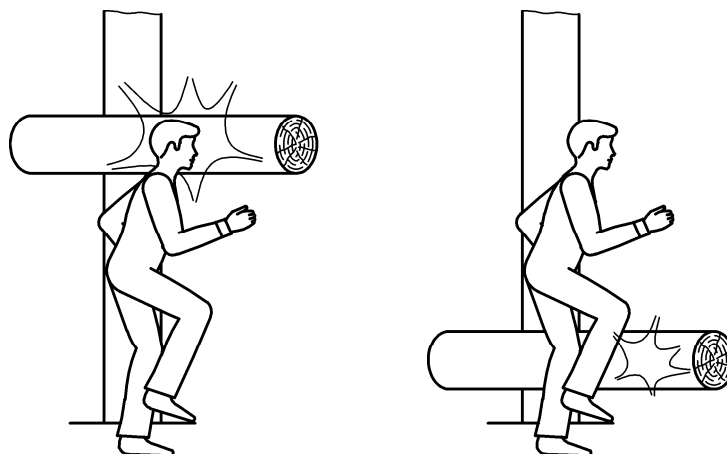


Figure 3 — Examples of unexpected obstacles

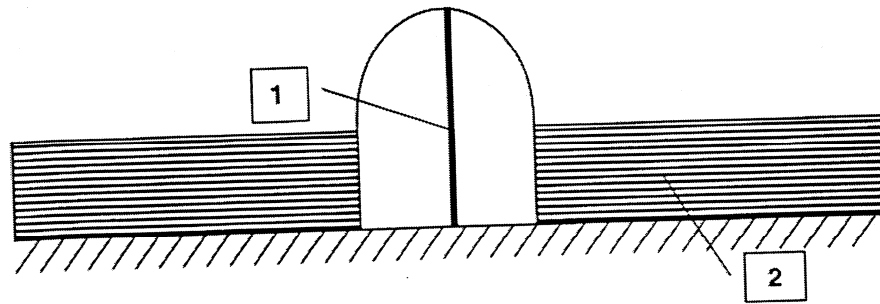


A1 a) Front view A1

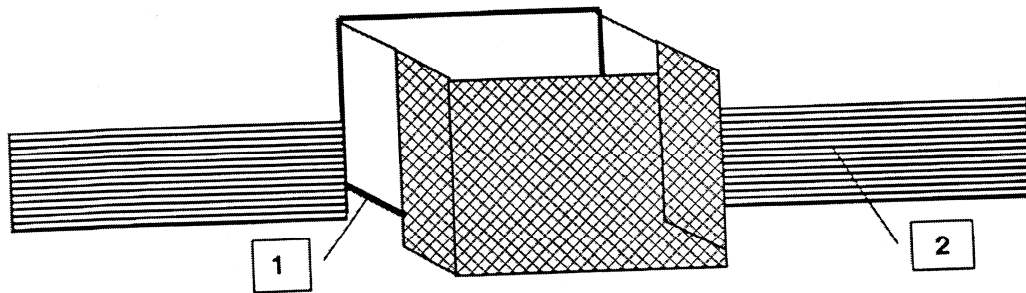


A1 b) Back view A1

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 15312:2007+A1:2010
<https://standards.iteh.ai/catalog/standards/sist/c7925215-f20e-4d78-b5ad-fd72f00c2470/sist-en-15312-2007a1-2010>

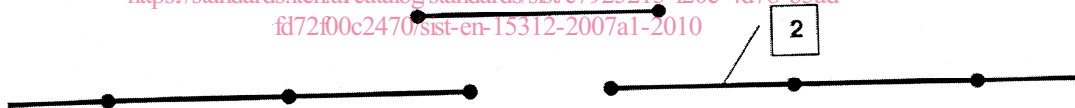

A1 c) Top view A1

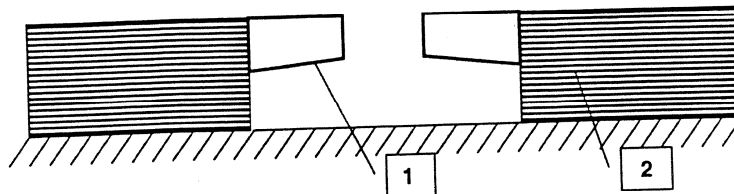

A1 d) Front view A1

Key

- 1 anti-cycle bar
- 2 multi-sports surround

Figure 4 — Examples of expected obstacles

EN 15312:2007+A1:2010 (E)**4.6 Connections**

Connections shall be secured such that they cannot come loose of their own accord unless specifically designed to do so.

Connections shall be safeguarded so that they cannot be undone without tools.

4.7 Consumable components (parts of wear and tear)

Components subjected to wear or designed to be renewed during the life of the equipment, for example bearings, shall be capable of being replaced.

Replaceable components should be protected against an unauthorised intervention and should require little maintenance. Any lubricants leaking out should not soil the equipment or adversely affect its safe use.


4.8 Wire ropes

Wire ropes shall be made from galvanized or corrosion-resistant wire.

Ferrules shall conform to ISO 8793 and the rope end shall coincide with the edge of the grip. Accessible wire rope clips, the thread ends of which protrude more than 8 mm, shall only be used outside the playing area or shall be covered by suitable means.

Turnbuckles shall have two closed loops and shall be made from corrosion-resistant material. It shall not be possible to undo turnbuckles without a tool.

Figure 5 shows examples of ferrules and turnbuckles.

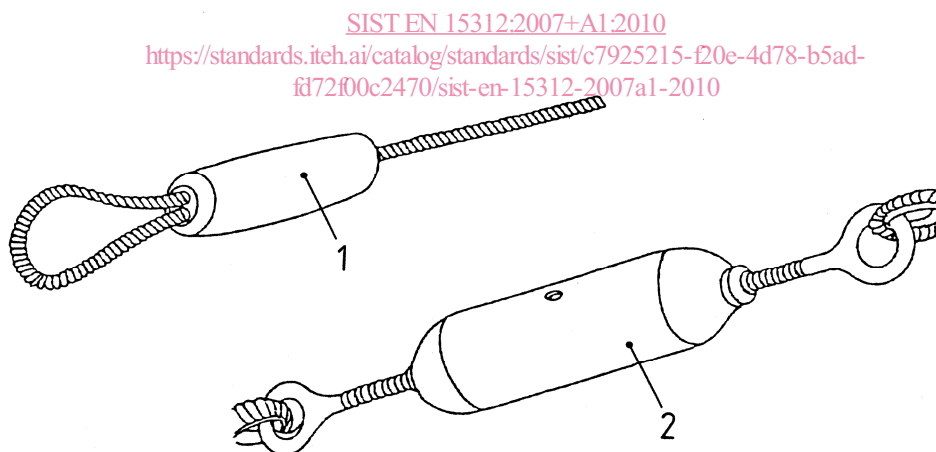**Key**

- 1 ferrule
- 2 turnbuckle

Figure 5 — Examples of ferrules and turnbuckles

4.9 Chains

Chains shall have a maximum opening of 8,6 mm in any one direction except where connections are made, where the maximum opening shall be greater than 18 mm or less than 8,6 mm.

4.10 Foundations

The foundations shall be designed such that they do not present a hazard (tripping, impact). Care should be taken to ensure that foundations are not exposed as a result of erosion.

4.11 Accessibility

A1) Any part of multi-sports equipment where the user is encouraged to access (e.g. play elements such as ladders, climbing walls) to an elevated surface above 1 000 mm height is classified as a play structure and shall comply with the requirements 4.2.4 "protection against falling", 4.2.8 "protection against injuries during movement and falling" and 4.2.7.3 "entrapment of clothing/hair" of EN 1176-1:2008, 4.2.4 "Protection against falling", 4.2.8 "Protection against injuries during movement and falling" and 4.2.7.3 "Entrapment of clothing/hair". **A1)**

When an elevated surface abuts a multi-sports area as a spectator platform for visibility of multi-sports activities, no impact attenuating surface is required within the multi-sports area if a barrier of **A1)** 2 000 mm **A1)** minimum height is provided. The requirements for impact attenuating surface apply to the remaining sides of the elevated surface.

NOTE The barrier is intended to prevent users gaining access to the multi-sports area either over the top or to the side of the barrier.

4.12 Removable elements

If the equipment includes any elements that are designed to be removable (e.g. post, exchange of individual parts of equipment), any cavities or holes left in the surface shall be suitably covered to ensure continuity of the playing surface.

5 Specific requirements

SIST EN 15312:2007+A1:2010

<https://standards.iteh.ai/catalog/standards/sist/c7925215-f20e-4d78-b5ad-fd72f00c2470/sist-en-15312-2007a1-2010>

5.1 General

Equipment shall comply with general requirements of this European Standard except in so far as they are modified by this section.

5.2 Basketball equipment

5.2.1 Requirements

5.2.1.1 Classification

Basketball equipment shall be classified by the design (types), the free space and typical performance criterion (classes) as shown in Tables 1 and 2.

NOTE This classification is in line with EN 1270.

Table 1 — Types

Type	Description	Example
1	fixed wall mounted	Figure 6
2	removable with sockets	Figure 7
3	fixed in the ground	Figure 8
4	combined basketball goal	Figure 13