# INTERNATIONAL STANDARD

ISO 2631-4

First edition 2001-02-01 **AMENDMENT 1** 2010-07-01

Mechanical vibration and shock — Evaluation of human exposure to whole-body vibration —

## Part 4:

Guidelines for the evaluation of the effects of vibration and rotational motion iTeh STon passenger and crew comfort (sin fixed-guideway transport systems

# AMENDMENT 1

https://standards.iteh.ai/catalog/standards/sist/15ed540e-1b51-4e26-b559-cda948161255/iso-2631-4-2001-amd-1-2010

Vibrations et chocs mécaniques — Évaluation de l'exposition des individus à des vibrations globales du corps —

Partie 4: Lignes directrices pour l'évaluation des effets des vibrations et du mouvement de rotation sur le confort des passagers et du personnel dans les systèmes de transport guidé

AMENDEMENT 1



### PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

# iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 2631-4:2001/Amd 1:2010 https://standards.iteh.ai/catalog/standards/sist/15ed540e-1b51-4e26-b559-cda948161255/iso-2631-4-2001-amd-1-2010



### COPYRIGHT PROTECTED DOCUMENT

### © ISO 2010

Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

### **Foreword**

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

Amendment 1 to ISO 2631-4:2001 was prepared by Technical Committee ISO/TC 108, *Mechanical vibration, shock and condition monitoring*, Subcommittee SC 4, *Human exposure to mechanical vibration and shock*.

Amendment 1 to ISO 2631-4:2001 cancels and replaces ISO 10056:2001.

(standards.iteh.ai)

# iTeh STANDARD PREVIEW (standards.iteh.ai)

# Mechanical vibration and shock — Evaluation of human exposure to whole-body vibration —

## Part 4:

Guidelines for the evaluation of the effects of vibration and rotational motion on passenger and crew comfort in fixed-guideway transport systems

## **AMENDMENT 1**

Page iii, Foreword

Add the following part:

Part 5: Method for evaluation of vibration containing multiple shocks

(standards.iteh.ai)

Page 5, Clause 6, 3rd paragraph, 2nd sentence

Replace "ISO 10056", by "Annex B" iteh ai/catalog/standards/sist/15ed540e-1b51-4e26-b559-cda948161255/iso-2631-4-2001-amd-1-2010

Page 8, after Table A.2

Insert Annex B (see overleaf).

# Annex B

(informative)

# Statistical analysis method

## **B.1 Symbols and abbreviated terms**

weighted root mean square (r.m.s.) value of acceleration, in metres per second squared  $a_{\mathsf{W}}$ 

b class width, in metres per second squared

probability histogram of the weighted r.m.s. values of acceleration h

 $h_{\rm c}$ cumulative probability histogram of the r.m.s. values of acceleration

subscript representing the number of an elementary block of data

argument characterizing the class of an observation m

n(m)

number of observations in class miTeh STANDARD PREVIEW

total number of observations  $n_{tot}$ 

(standards.iteh.ai)

### **B.2 Statistical analysis method**

ISO 2631-4:2001/Amd 1:2010 https://standards.iteh.ai/catalog/standards/sist/15ed540e-1b51-4e26-b559-

The data for comfort indices are determined from certain statistical parameters: average value of the r.m.s. values and characteristic parameter of the higher r.m.s. values (e.g. 95th and 99th percentiles). To evaluate these, the histogram of r.m.s. values of the weighted acceleration signal,  $a_{\rm w}$ , is used.

A probability, h(m), histogram and a cumulative probability,  $h_c(m)$ , histogram can be constructed (see examples in Figures B.1 and B.2):

$$h(m) = \frac{n(m)}{n_{\text{tot}}} \tag{B.1}$$


$$h_{\rm C}(m) = \sum_{i=0}^{m} h(i)$$
 (B.2)

where m is the value of  $a_{W}(m)/b$  rounded down to the nearest integer.

Figures B.1 and B.2 represent a probability histogram and the corresponding cumulative probability histogram

$$h_{\mathsf{C}}(m) = P[a_{\mathsf{W}} \leqslant a_{\mathsf{W}}(m)] \tag{B.3}$$

where P is probability.

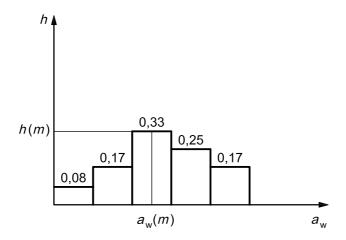

### Key

 $a_{\rm W}$  weighted r.m.s. acceleration value

 $a_{\mathrm{W}}\!(m)$  weighted r.m.s. acceleration value for class m

h probability

h(m) probability for class m

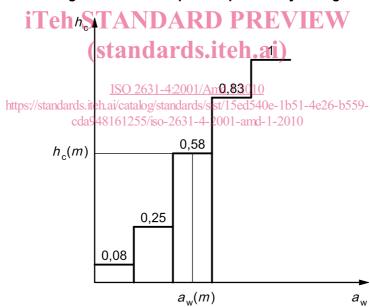


Figure B.1 — Example of a probability histogram

## Key

 $a_{\rm w}$  weighted r.m.s. acceleration value

 $a_{\rm W}\!(m)$  weighted r.m.s. acceleration value for class m

*h*<sub>c</sub> cumulative probability

 $h_{\rm C}(m)$  cumulative probability for class m

Figure B.2 — Example of the corresponding cumulative probability histogram

## ISO 2631-4:2001/Amd.1:2010(E)

## Page 9, Bibliography

Add

[1] ISO 2631-5, Mechanical vibration and shock — Evaluation of human exposure to whole-body vibration — Part 5: Method for evaluation of vibration containing multiple shocks

Renumber Reference "[1] ISO 8727" to "[2] ISO 8727".

Delete the existing Reference [2], ISO 10056.

In Reference [10], replace "1990" by "1996".

# iTeh STANDARD PREVIEW (standards.iteh.ai)

# iTeh STANDARD PREVIEW (standards.iteh.ai)