



SLOVENSKI STANDARD
SIST ISO 7971-1:2005
01-junij-2005

Technical title in a non-standard font.

Cereals -- Determination of bulk density, called "mass per hectolitre" -- Part 1: Reference method

iTeh STANDARD PREVIEW

Céréales -- Détermination de la masse volumique dite "masse à l'hectolitre" -- Partie 1: Méthode de référence

SIST ISO 7971-1:2005

Ta slovenski standard je istoveten z: ISO 7971-1:2003

ICS:

67.060 Cereals, pulses and derived products

SIST ISO 7971-1:2005 en

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST ISO 7971-1:2005

<https://standards.iteh.ai/catalog/standards/sist/1a4973a1-d5eb-45ae-8dd6-32e2abd77332/sist-iso-7971-1-2005>

# INTERNATIONAL STANDARD

# ISO 7971-1

First edition  
2003-07-01

---

---

## Cereals — Determination of bulk density, called “mass per hectolitre” —

### Part 1: Reference method

*Céréales — Détermination de la masse volumique, dite «masse à l'hectolitre» —*  
*Partie 1: Méthode de référence*

[SIST ISO 7971-1:2005](https://standards.iteh.ai/catalog/standards/sist/1a4973a1-d5eb-45ae-8dd6-32e2abd77332/sist-iso-7971-1-2005)

<https://standards.iteh.ai/catalog/standards/sist/1a4973a1-d5eb-45ae-8dd6-32e2abd77332/sist-iso-7971-1-2005>



Reference number  
ISO 7971-1:2003(E)

© ISO 2003

**ISO 7971-1:2003(E)****PDF disclaimer**

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ISO 7971-1:2005](https://standards.iteh.ai/catalog/standards/sist/1a4973a1-d5eb-45ae-8dd6-32e2abd77332/sist-iso-7971-1-2005)

<https://standards.iteh.ai/catalog/standards/sist/1a4973a1-d5eb-45ae-8dd6-32e2abd77332/sist-iso-7971-1-2005>

© ISO 2003

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 7971-1 was prepared by Technical Committee ISO/TC 34, *Food products*, Subcommittee SC 4, *Cereals and pulses*.

This first edition of ISO 7971-1 cancels and replaces ISO 7970:1986, which has been editorially revised. The title has been changed to make it Part 1.

ISO 7971 consists of the following parts, under the general title *Cereals — Determination of bulk density, called “mass per hectolitre”*:

- Part 1: Reference method
- Part 2: Routine method

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST ISO 7971-1:2005

<https://standards.iteh.ai/catalog/standards/sist/1a4973a1-d5eb-45ae-8dd6-32e2abd77332/sist-iso-7971-1-2005>

# Cereals — Determination of bulk density, called “mass per hectolitre” —

## Part 1: Reference method

### 1 Scope

This part of ISO 7971 specifies the reference method for the determination of bulk density, called “mass per hectolitre”, of cereals.

NOTE Several routine methods are used in different countries. A routine method for the determination of bulk density, called “mass per hectolitre” utilizing a 1 litre measuring container is given in ISO 7971-2 <sup>[1]</sup>.

### 2 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

#### 2.1

##### mass per hectolitre

ratio of the mass of a cereal to the volume it occupies after being poured into a container under well-defined conditions

NOTE It is expressed in kilograms per hectolitre at a stated moisture content.

### 3 Principle

A sample is poured in a controlled manner from a hopper into a 20 l container, which is then weighed.

### 4 Requirements for apparatus

#### 4.1 General

The apparatus used shall comply with the following requirements, which correspond to those in OIML Recommendations R 15 <sup>[2]</sup>, and shall be similar to that shown in Figure 1.

NOTE For information, the requirements for the apparatus specified in this International Standard comply with those prescribed in the relevant Council Directive of the European Communities <sup>[3]</sup>.

#### 4.2 Description and operation

##### 4.2.1 Pre-filling measure

The pre-filling measure has a capacity of 24 l. Its internal form is a right circular cylinder with height approximately equal to its diameter.

Dimensions in millimetres

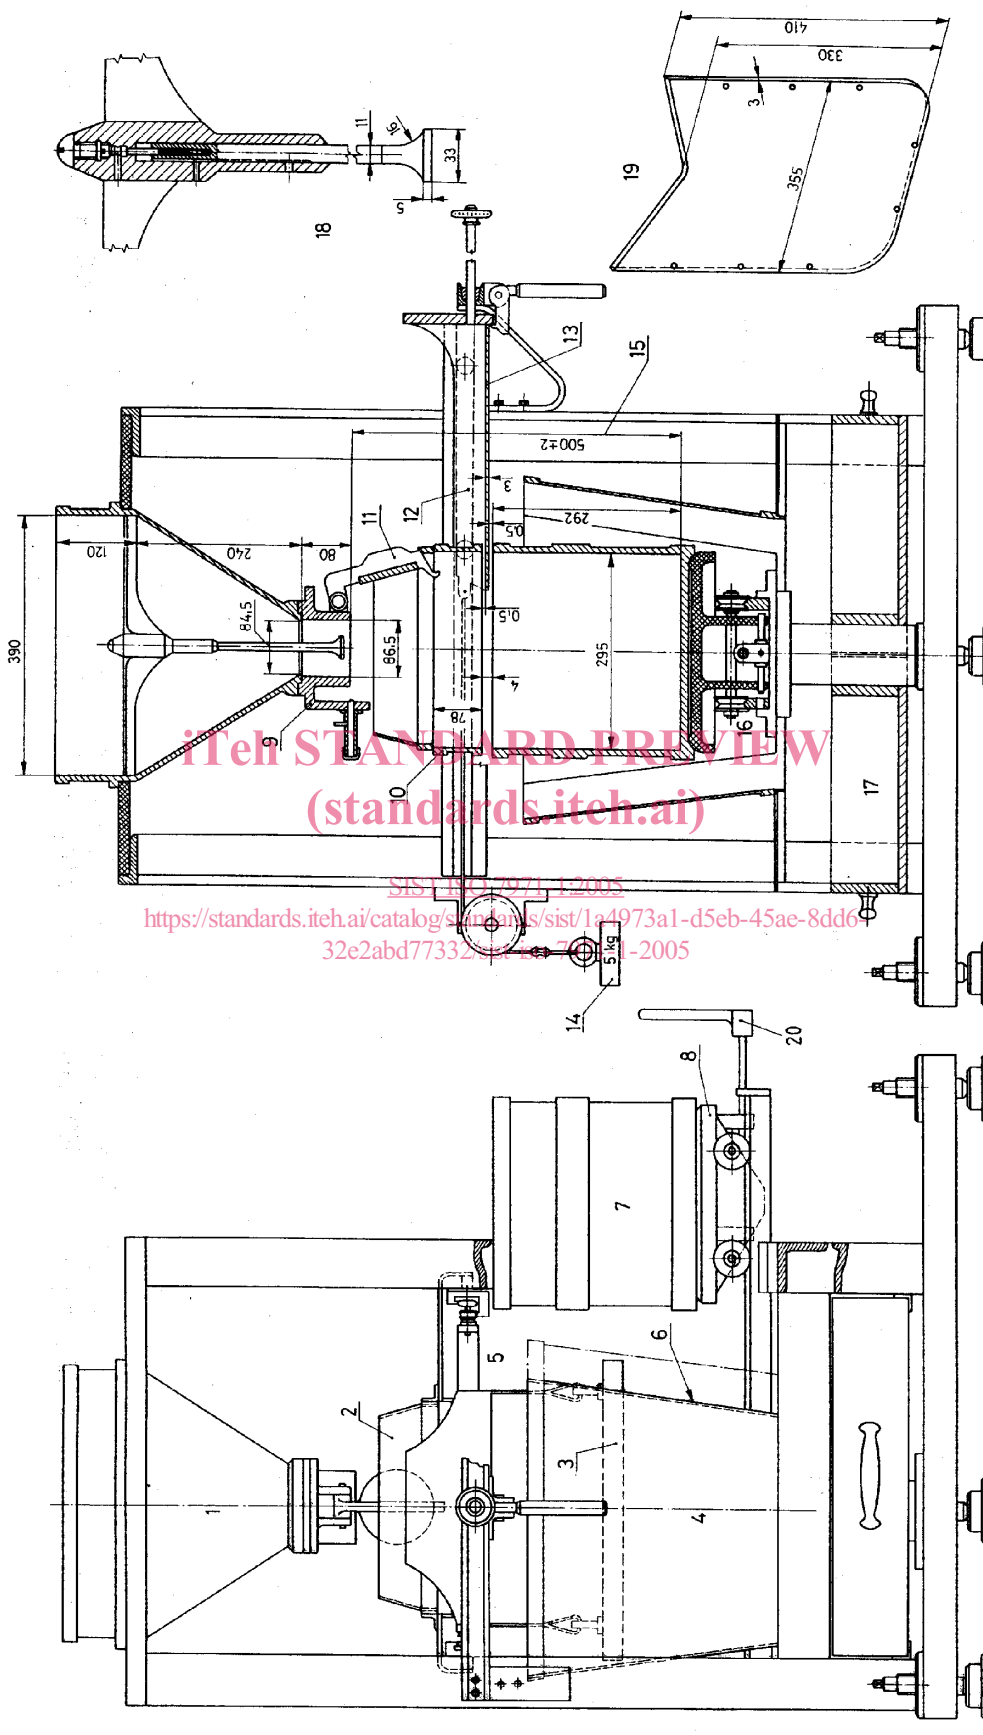


Figure 1 — Apparatus for determining bulk density of cereals



**Key**

1	filling hopper	7	20 l measuring container	15	height of flow
2	truncated cone for guiding the flow of grain	8	base support of measuring container	16	wedged base support of measuring container in filling position
3	straightedge counterweight	9	tapered emptying tube	17	collecting box for surplus grain
4	guiding skirt for surplus grain	10	guiding collar for grain flow	18	distributor
5	guide by rail and rollers of the frame of the straightedge	11	shutter	19	straightedge
6	removable part of skirt allowing the measuring container to be removed	12	frame of straightedge	20	handle of wedge for base support
		13	straightedge		
		14	straightedge counterweight		

NOTE This figure is for information only except for the dimensions shown, which are obligatory.

**Figure 1 — Apparatus for determining bulk density of cereals (continued)**

#### 4.2.2 Filling hopper

The hopper has the shape of a truncated vertical circular cone surmounted by a cylindrical rim. Its lower part terminates in an axial tube with a slightly tapering bore, the wider end of which is at the bottom. A shutter, hinge-mounted on the tube and able to close the tube completely, controls the emptying process.

The hopper receives from the pre-filling measure a quantity of grain greater than the capacity of the measuring container.

#### 4.2.3 Distributor

The distributor is an inverted circular mushroom-shaped element connected to the bottom end of a vertical rod positioned in the axis of the hopper.

The rod lowers the distributor inside the tapered tube to an adjustable level from top to bottom to allow adjustment of the apparatus: lowering the distributor increases the rate of flow of the grain, which collects in greater quantity owing to compaction in the measuring container, thus giving higher results; conversely, the results are lower when the distributor is raised.

#### 4.2.4 Measuring container

The measuring container has a capacity of 20 l. Its internal form is a right circular cylinder with height approximately equal to its diameter. Its upper edge is ground flat.

#### 4.2.5 Base support for the measuring container

A base on rails supports the container and allows it to travel underneath the hopper, in the axis of which it can be locked, or taken out of the chassis for easy removal.

#### 4.2.6 Protection and guiding collar for grain flow

A cylindrical collar, of the same diameter as the measuring container, is placed between the hopper and the measuring container, leaving a horizontal space between its lower edge and the upper edge of the container to allow the passage of a straightedge.

During filling, the collar, which is surmounted by a truncated cone-shaped section, protects the grain as it drops and at the end retains the surplus grain.