

SLOVENSKI STANDARD

SIST EN 13715:2006+A1:2011

01-april-2011

Železniške naprave - Kolesne dvojice in osnovni vozički - Kolesa - Profil tekalne površine

Railway applications - Wheelsets and bogies - Wheels - Tread profile

Bahnanwendungen - Radsätze und Drehgestelle - Räder - Radprofile

Applications ferroviaires - Essieux montés et bogies - Roues - Profil de roulement

STANDARD PREVIEW
(standards.iteh.ai)

Ta slovenski standard je istoveten z: EN 13715:2006+A1:2010

<https://standards.iteh.ai/catalog/standards/sist/7acce7a5-b730-43b3-92b7-17332b392381/sist-en-13715-2006a1-2011>

ICS:

45.040	Materiali in deli za železniško tehniko	Materials and components for railway engineering
--------	--	---

SIST EN 13715:2006+A1:2011

en,fr,de

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 13715:2006+A1:2011

<https://standards.iteh.ai/catalog/standards/sist/7acce7a5-b730-43b3-92b7-17332b392381/sist-en-13715-2006a1-2011>

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

EN 13715:2006+A1

October 2010

ICS 45.040

Supersedes EN 13715:2006

English Version

**Railway applications - Wheelsets and bogies - Wheels - Tread
profile**

Applications ferroviaires - Essieux montés et bogies -
Roues - Profil de roulement

Bahnanwendungen - Radsätze und Drehgestelle - Räder -
Radprofile

This European Standard was approved by CEN on 9 January 2006 and includes Amendment 1 approved by CEN on 14 September 2010.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

iTeh STANDARD PREVIEW
(standards.iteh.ai)
<https://standards.iteh.ai/catalog/standards/sist/7accc7a5-b730-43b3-92b7-17332b392381/sist-en-13715-2006a1-2011>





EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents

Page

Foreword.....	3
Introduction	4
1 Scope	5
2 Normative references	5
3 Definition of the tread profile.....	5
4 Symbols and abbreviations	6
4.1 Definition of the profiles	7
5 Construction method	7
5.1 Definition of the axes	7
5.2 Base profile	7
5.3 Profile construction	7
5.3.1 Profile zone H2 – D1 (flange)	7
5.3.2 Profile connection zone D1 – C1	8
5.3.3 Profile zone D1 – C1 –D0 for flange thicknesses $28,5 \text{ mm} \leq e \leq 32,5 \text{ mm}$	9
5.3.4 Zone D0 – B1 (B1a or B1b).....	10
5.3.5 Reverse slope and chamfer.....	11
6 Geometric characteristics.....	11
6.1 R20,5 connecting radius	11
6.2 RE and RI 12 mm connecting radii.....	11
6.3 Rfa connecting radius	12
6.4 R13 connecting radius	12
6.5 Wheel tread.....	12
6.6 Reverse slope – Chamfer.....	12
7 Profile designation.....	12
8 Reference equipment for verification of the wheel profile	12
Annex A (normative) Flange	13
A.1 Definition of the flange.....	13
A.2 Flange geometry	14
Annex B (normative) 1/40th profile.....	15
B.1 Complete reference profile: construction with a 32,5 mm thick flange and 15 % reverse slope.....	15
B.2 Profile construction: specific zones	15
Annex C (normative) S1002 profile	17
C.1 Complete reference profile: construction with 32,5 mm thick flange and 6,7 % reverse slope.....	17
C.2 Profile construction: specific zones	17
Annex D (normative) EPS profile	21
D.1 Complete reference profile: construction with 32,5 mm thick flange and 10 % reverse slope.....	21
D.2 Profile construction: specific zones	21
Annex ZA (informative)  Relationship between this European Standard and the Essential Requirements of EU Directive 2008/57/EC 	24
Bibliography.....	28

Foreword

This document (EN 13715:2006+A1:2010) has been prepared by Technical Committee CEN/TC 256 "Railway applications", the secretariat of which is held by DIN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by April 2011, and conflicting national standards shall be withdrawn at the latest by April 2011.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN and/or CENELEC shall not be held responsible for identifying any or all such patent rights.

This document comprises amendment 1 adopted by CEN on 2010-09-14.

This document supersedes EN 13715:2006.

The start and end of the text added or modified by the amendment is indicated in the text by the !" marks.

[A1] This document has been prepared under a mandate given to CEN/CENELEC/ETSI by the European Commission and the European Free Trade Association, and supports essential requirements of EU Directive 2008/57/EC. **[A1]**

[A1] For relationship with EU Directive 2008/57/EC see informative Annex ZA, which is an integral part of this document. **[A1]**

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

EN 13715:2006+A1:2010 (E)**Introduction**

This standard states requirements that are in accordance with the principles adopted by the International Union of Railways. It:

- describes the rules, parameters and construction methods of the wheel tread profile;
- defines the geometry of the flange and reverse slope. The thicknesses and height of the flange are determined by the railway undertaking or its representative in compliance with the normative documents in force;
- defines the co-ordinates and geometry of the following three reference tread profiles of the wheels and their reverse slope:
 - 1/40th (reverse slope 15 %);
 - S1002 (reverse slope 6,7 %, other value used 15 %) in conformity with UIC Leaflet 510-2;
 - EPS (reverse slope 10 %) equivalent to profile P8 of the United Kingdom with a flange 30 mm thick.

These three reference profiles are defined in Annexes B, C and D and represent original profiles from the time of their design, the flanges having been harmonized to a 32,5 mm flange thickness.

- defines the tolerances needed to achieve calibration control.

All the dimensions in this standard are given in millimetres.

iTeh STANDARD PREVIEW
(standards.iteh.ai)
[SIST EN 13715:2006+A1:2011](https://standards.iteh.ai/catalog/standards/sist/7acce7a5-b730-43b3-92b7-17332b392381/sist-en-13715-2006a1-2011)
<https://standards.iteh.ai/catalog/standards/sist/7acce7a5-b730-43b3-92b7-17332b392381/sist-en-13715-2006a1-2011>

1 Scope

This European Standard defines the tread profiles of wheels with a diameter greater than or equal to 330 mm used on vehicles running on European standard gauge track to fulfil interoperability requirements. These profiles apply to new wheels, whether free-standing or assembled as wheelsets, as well as to wheels that require reprofiling during maintenance.


Any profile that does not conform to this standard shall only be used following agreement between the train operator and the infrastructure manager.

2 Normative references

None apply to this standard.

3 Definition of the tread profile

The tread profile is shown in Figure 1.

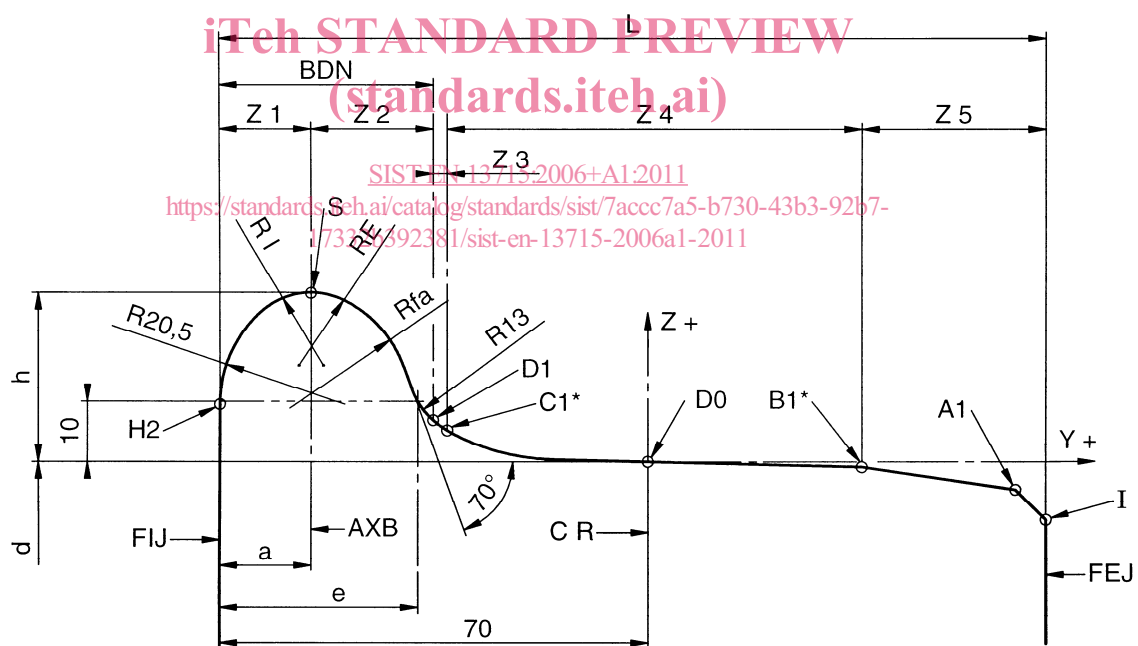

Key

The points marked with "*" relate respectively to the following profiles

B 1	S1002
B1a	1/40 th
B1b	EPS
C1	S1002
C1a	1/40 th
C1b	EPS

See Table 1 – Symbols and abbreviations

Figure 1 — Wheel tread profile

EN 13715:2006+A1:2010 (E)

4 Symbols and abbreviations

Table 1 — Symbols and abbreviations

Z 1	Internal zone of flange (H2 – S)
Z 2	External zone of flange (S – D1)
Z 3	Connection zone, flange to wheel tread [D1 – C1(C1a, C1b)]
Z 4	Wheel tread zone [C1 (C1a, C1b) - B1 (B1a, B1b)]
Z 5	Zone between the wheel tread (reverse slope) and chamfer [B1 (B1a, B1b) – I]
A	Position of the axis intersecting the tip of the flange relative to the internal face of the wheel
D	Wheel diameter
E	Flange thickness
De	Difference between the reference value for flange thickness (32,5 mm) and the new value of "e"
H	Flange height
Y	Y axis
Z	Z axis
Y	Abscissa according to "Y" axis for the specific point
Z	Ordinate according to the "Z" axis for the specific point
A1	Connection point of the reverse slope with the 5 mm x 5 mm chamfer
B1 (B1a, B1b)	Connection point of the reverse slope with the wheel tread
C1 C1a, C1b)	Starting point of the connection zone between the wheel tread and the flange zone
C11a, C11b, C12, D1a, D1b, E1, F1, G1, H1, T1	Unique profile construction points
D0	Location of the wheel tread, 70 mm from its internal face. Origin of the co-ordinate axes
D1	Starting point of the flange
H2	Finishing point of the flange on the internal face of the wheel
I	Starting point of the profile on the external face of the wheel
L	Rim nominal width, 135 mm or 140 mm
Rfa	External flange radius, a function of the flange height
RE	12 mm radius, connection to the external face of the flange
RI	12 mm radius, connection to the internal face of the flange
Rem	Centre of radius RE
Rim	Centre of radius RI
R13	13 mm radius, connection between the internal face of the flange and the wheel tread
Hm	Centre of 20,5 mm radius
Fm	Centre of Rfa radius
Dm	Centre of R 13 radius
Jm	Centre of 100 mm radius (EPS) and of 36 mm radius (1/40 th)
Jm1	Centre of 330 mm radius (EPS)
S	Connection at the tip of the flange
AXB	Connection axis at the tip of the flange
BDN	Flange
CR	Wheel tread plane
FEJ	External face of the wheel
FIJ	Internal face of the wheel

4.1 Definition of the profiles

The profiles comprise:

- two zones H2 – S and S – D1, with fixed geometry;
- a connection zone D1 – C1, unique to each of them, to make a tangential connection at point C1;
- a zone C1 – B1 (either B1a, or B1b) unique to each of them. The co-ordinates are given in Annexes B, C and D for the three reference profiles including point D0;
- a zone B1 (either B1a or B1b) – A1 – I, comprising the reverse slope and chamfer, unique to each reference profile. The reverse slope shall be in the range 6,7 % to 15 %.

5 Construction method

5.1 Definition of the axes

The Y axis is parallel to the axis of rotation of the wheel with the positive values towards the external face of the wheel. The Z axis is perpendicular to the latter with the positive values towards the outside of the wheel. Their origin is at point D0, situated 70 mm from the internal face of the wheel.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

5.2 Base profile

The base profile is that obtained with a flange 32,5 mm thick and 28 mm high. All the others are developed from this fundamental profile.

[SIST EN 13715:2006+A1:2011](https://standards.iteh.ai/catalog/standards/sist/7acce7a5-b730-43b3-92b7-17332b392381/sist-en-13715-2006a1-2011)

[https://standards.iteh.ai/catalog/standards/sist/7acce7a5-b730-43b3-92b7-](https://standards.iteh.ai/catalog/standards/sist/7acce7a5-b730-43b3-92b7-17332b392381/sist-en-13715-2006a1-2011)

5.3 Profile construction [17332b392381/sist-en-13715-2006a1-2011](https://standards.iteh.ai/catalog/standards/sist/7acce7a5-b730-43b3-92b7-17332b392381/sist-en-13715-2006a1-2011)

5.3.1 Profile zone H2 – D1 (flange)

The reference flange (dimensions, centres and radii) is given in Annex A for a flange thickness of 32,5 mm.

The different flange thicknesses are obtained by translating the zones S-D1, parallel to the Y axis, towards the internal face of the wheel. Annex A gives all the co-ordinates for flange thicknesses between 28,5 mm and 32,5 mm.

After translation, the connection axis (AXB) at the tip of the flange (S) is at a distance, in mm, from the wheel

internal face of: $a = 15 - \left(\frac{32,5 - e}{2} \right)$

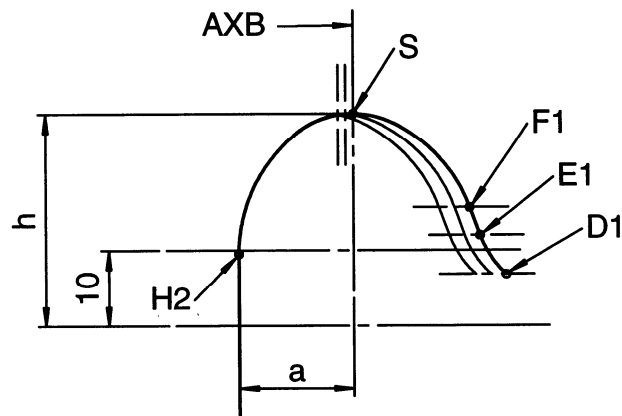


Figure 2 — Flange

5.3.2 Profile connection zone D1 – C1

The characteristics of these connections specific to each profile are given in Annexes B, C and D.

The definitions of the connection zones are shown in Figures 3, 4 and 5.

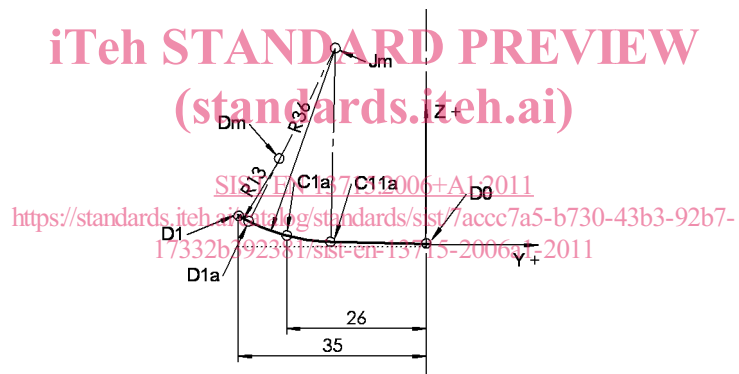

Figure 3 — 1/40th connection zone

Figure 4 — S1002 connection zone

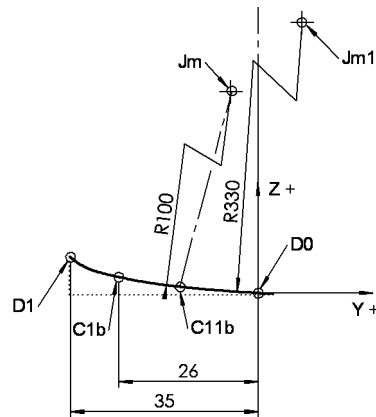


Figure 5 — EPS connection zone

5.3.3 Profile zone D1 – C1 – D0 for flange thicknesses $28,5 \text{ mm} \leq e \leq 32,5 \text{ mm}$

5.3.3.1 S1002 and 1/40th profiles

For flange thicknesses greater than 28,5 mm, but less than 32,5 mm, the profiles are obtained by translating the zones D1-C1 (connection zone) and C1-T1 along the Y axis towards the internal face of the wheel, by an amount equal to the reduction (d_e) in thickness of the flange.

The position of the point T1 is defined relative to the reference point D0 for all flange thicknesses.

The connection between points D0 and T1 may be smoothed by a straight line.

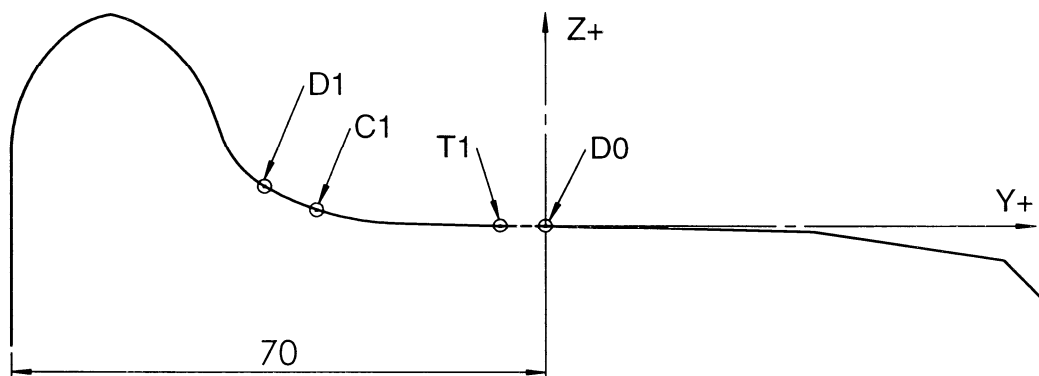


Figure 6 — Extension of the wheel tread zone T1 – D0

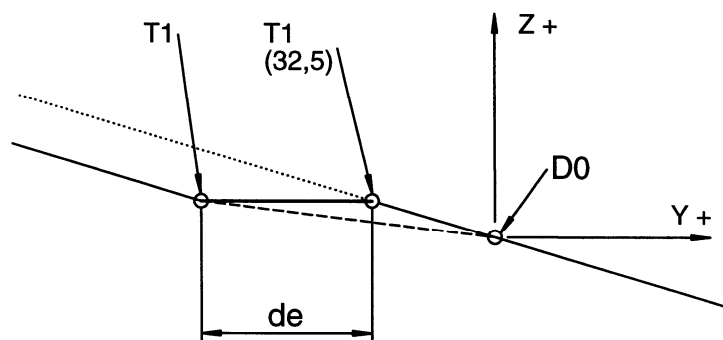


Figure 7 — Connection T1 – D0

5.3.3.2 EPS profile

For the flange thickness values greater than 28,5 mm and less than 32,5 mm, the profile shape is obtained by changing a curve in zone D1-C1, the co-ordinates of which are given in Table D.1 which defines the EPS profile in Annex D (the centre of the 330 mm radius remains fixed).

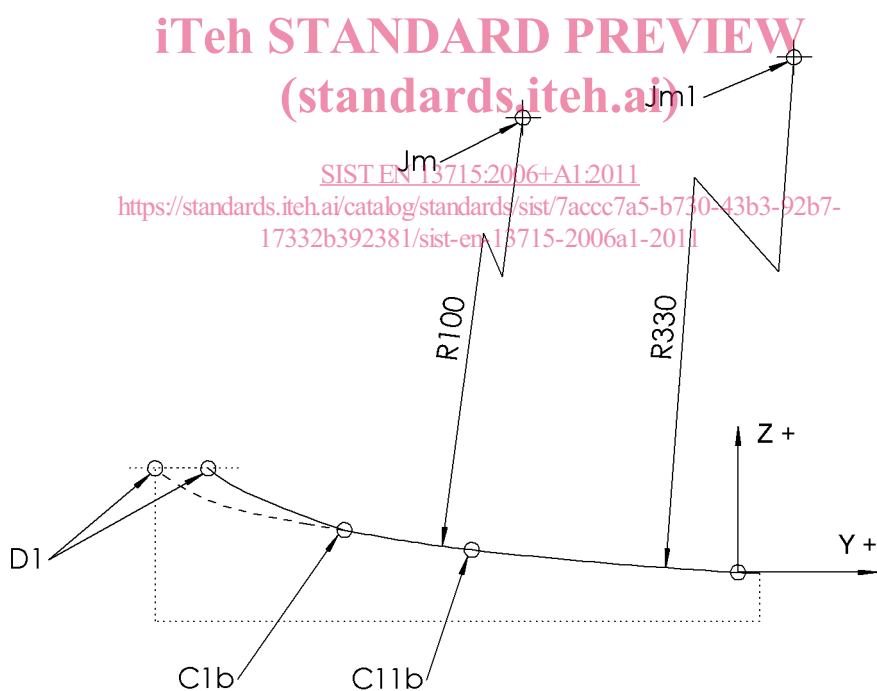


Figure 8 —EPS profile

5.3.4 Zone D0 – B1 (B1a or B1b)

The zone D0 – B1 (B1a or B1b), as appropriate to each profile, remains fixed for each type.