



**SLOVENSKI STANDARD**  
**SIST EN 14067-5:2007+A1:2010**  
**01-december-2010**

---

**Železniške naprave - Aerodinamika - 5. del: Zahteve in preskusni postopki pri aerodinamiki v predorih**

Railway applications - Aerodynamics - Part 5: Requirements and test procedures for aerodynamics in tunnels

Bahnanwendungen - Aerodynamik - Teil 5: Anforderungen und Prüfverfahren für Aerodynamik im Tunnel

Applications ferroviaires - Aérodynamique - Partie 5: Exigences et procédures d'essai pour l'aérodynamique en tunnel

**ITeh STANDARD PREVIEW**  
**(standards.iteh.ai)**  
<https://standards.iteh.ai/catalog/standards/sist/0cf2ab8c-00a7-456b-97ae-10aba433ebb8/sist-en-14067-5-2007a1-2010>

**Ta slovenski standard je istoveten z: EN 14067-5:2006+A1:2010**

---

**ICS:**

45.060.01      Železniška vozila na splošno      Railway rolling stock in general

93.060          Gradnja predorov                      Tunnel construction

**SIST EN 14067-5:2007+A1:2010**                      **en,fr,de**

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST EN 14067-5:2007+A1:2010

<https://standards.iteh.ai/catalog/standards/sist/0cf2ab8c-00a7-456b-97ae-10aba433ebb8/sist-en-14067-5-2007a1-2010>

EUROPEAN STANDARD  
NORME EUROPÉENNE  
EUROPÄISCHE NORM

**EN 14067-5:2006+A1**

November 2010

ICS 45.060.01; 93.060

Supersedes EN 14067-5:2006

English Version

## Railway applications - Aerodynamics - Part 5: Requirements and test procedures for aerodynamics in tunnels

Applications ferroviaires - Aérodynamique - Partie 5:  
Exigences et procédures d'essai pour l'aérodynamique en tunnel

Bahnwendungen - Aerodynamik - Teil 5: Anforderungen und Prüfverfahren für Aerodynamik im Tunnel

This European Standard was approved by CEN on 30 June 2006 and includes Amendment 1 approved by CEN on 28 September 2010.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

[SIST EN 14067-5:2007+A1:2010](https://standards.iteh.ai/catalog/standards/sist/0c2ab8c-00a7-456b-97ae-10aba433ebb8/sist-en-14067-5-2007a1-2010)

<https://standards.iteh.ai/catalog/standards/sist/0c2ab8c-00a7-456b-97ae-10aba433ebb8/sist-en-14067-5-2007a1-2010>



EUROPEAN COMMITTEE FOR STANDARDIZATION  
COMITÉ EUROPÉEN DE NORMALISATION  
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: Avenue Marnix 17, B-1000 Brussels

## Contents



	Page
Foreword.....	4
<b>1 Scope .....</b>	<b>5</b>
<b>2 Normative references .....</b>	<b>5</b>
<b>3 Terms, definitions, symbols and abbreviations .....</b>	<b>5</b>
<b>4 Methodologies for quantifying the pressure changes in order to meet the medical health criterion.....</b>	<b>5</b>
4.1 General.....	5
4.2 Train-tunnel-pressure signature .....	5
4.3 Maximum pressure changes .....	8
<b>5 Pressure loading on unsealed crossing trains.....</b>	<b>10</b>
<b>6 Pressure loading on sealed trains in tunnels.....</b>	<b>12</b>
6.1 General.....	12
6.2 Single train case .....	13
6.3 Two train case.....	15
<b>Annex A (informative) Predictive equations.....</b>	<b>20</b>
<b>Annex B (informative) Pressure comfort criteria .....</b>	<b>28</b>
<b>Annex C (informative) Micro-pressure wave .....</b>	<b>29</b>
<b>Annex ZA (informative)  Relationship between this European Standard and the Essential Requirements of EU Directive 2008/57/EC of the European Parliament and of the Council of 17 June 2008 on the interoperability of the rail system within the Community (Recast)  .....</b>	<b>32</b>
<b>Bibliography .....</b>	<b>35</b>
<b>Figure 1 — Train-tunnel-pressure signature at a fixed position in a tunnel (detail).....</b>	<b>6</b>
<b>Figure 2 — Train-tunnel-pressure signature at an exterior position just behind the nose of the train .....</b>	<b>7</b>
<b>Figure 3 — External pressure drop due to the head passage of a crossing train .....</b>	<b>10</b>
<b>Figure 4 — Internal pressure evolution inside an unsealed vehicle due to the head passage of a crossing train .....</b>	<b>10</b>
<b>Figure 5 — Pressure differences on an unsealed vehicle due to the head passage of a crossing train .....</b>	<b>11</b>
<b>Figure 6 — Typical measured maximum forces on a freight wagon door during the head passage of a crossing train.....</b>	<b>12</b>
<b>Figure 7 — Pressure difference on a well sealed train in two successive tunnels .....</b>	<b>13</b>
<b>Figure 8 — External pressure histories at different speeds in two successive tunnels.....</b>	<b>14</b>
<b>Figure 9 — Influence of tunnel length on maximum external pressure variation.....</b>	<b>14</b>
<b>Figure 10 — Influence of the relative entry time <math>\Delta t_{1,2}</math> on maximum absolute values of pressure differences for a particular situation .....</b>	<b>15</b>

Figure 11 — Example scenario for train crossings during 1,5 h of scheduled traffic on a high speed line with 6 trains in circulation passing 6 tunnels which cover 10 % of the line length .....	17
Figure 12 — Effect of time schedule variation on the number of train crossings in tunnels for a particular train .....	18
Figure 13 — Calculated pressure trace and resulting pressure loadings above 500 Pa (arrowed) .....	19
Figure 14 — Pressure loadings for two different crossing frequency scenarios .....	19
Figure A.1 — Calculation of a train-tunnel-pressure signature .....	21
Figure A.2 — Solutions $X_{fr}$ of Equation (A.13) for different values of $\zeta = \zeta_h + \zeta_{fr}$ .....	23
Figure A.3 — Solution $X_t$ of Equation (A.18) for different values of $\zeta_1 = \zeta_h + \zeta_{fr} + \zeta_t$ with $\zeta_E = 0,5$ .....	25
Figure A.4 — Aerodynamic drag coefficient .....	27
Figure C.1 — Wave generation, propagation and radiation .....	29
Figure C.2 — Steepening in concrete slab tunnels .....	30
Figure C.3 — Radiation of micro pressure wave .....	31

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST EN 14067-5:2007+A1:2010](https://standards.iteh.ai/catalog/standards/sist/0cf2ab8c-00a7-456b-97ae-10aba433ebb8/sist-en-14067-5-2007a1-2010)

<https://standards.iteh.ai/catalog/standards/sist/0cf2ab8c-00a7-456b-97ae-10aba433ebb8/sist-en-14067-5-2007a1-2010>

**EN 14067-5:2006+A1:2010 (E)****Foreword**

This document (EN 14067-5:2006+A1:2010) has been prepared by Technical Committee CEN/TC 256 "Railway applications", the secretariat of which is held by DIN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by May 2011, and conflicting national standards shall be withdrawn at the latest by May 2011.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

This document includes Amendment 1, approved by CEN on 2010-09-28.

This document supersedes EN 14067-5:2006.

The start and finish of text introduced or altered by amendment is indicated in the text by tags  $\boxed{A_1}$   $\boxed{A_1}$ .

$\boxed{A_1}$  This document has been prepared under a mandate given to CEN/CENELEC/ETSI by the European Commission and the European Free Trade Association, and supports essential requirements of EU Directive 2008/57/EC.

For relationship with EU Directive 2008/57/EC, see informative Annex ZA, which is an integral part of this document.  $\boxed{A_1}$

This European Standard is part of the series "~~Railway applications~~ Aerodynamics" which consists of the following parts:

- Part 1: Symbols and units
- Part 2: Aerodynamics on open track
- Part 3: Aerodynamics in tunnels
- Part 4: Requirements and test procedures for aerodynamics on open track
- Part 5: Requirements and test procedures for aerodynamics in tunnels
- Part 6: Cross wind effects on railway operation

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

## 1 Scope

This European Standard applies to the aerodynamic loading caused by trains running in a tunnel.

## 2 Normative references

The following referenced document is indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 14067-1:2003, *Railway applications — Aerodynamics — Part 1: Symbols and units*

## 3 Terms, definitions, symbols and abbreviations

For the purposes of this document, the terms, definitions, symbols and abbreviations given in EN 14067-1:2003 and the following apply.

NOTE Additional definitions, symbols and abbreviations are explained in the text.

### 3.1

#### tunnel

closed structure enveloping track(s) with a length of more than 20 m

## 4 Methodologies for quantifying the pressure changes in order to meet the medical health criterion

[SIST EN 14067-5:2007+A1:2010](https://standards.iteh.ai/catalog/standards/sist/0c2ab8c-00a7-456b-97ae-10aba433ebb8/sist-en-14067-5-2007a1-2010)

<https://standards.iteh.ai/catalog/standards/sist/0c2ab8c-00a7-456b-97ae-10aba433ebb8/sist-en-14067-5-2007a1-2010>

### 4.1 General

The relevant pressure changes caused by trains running in a tunnel may be measured at full-scale, estimated from approximating equations (see Annex A), predicted using validated numerical methods or measured using moving model tests. The determination of the pressure variations in order to meet the medical safety pressure limits may be undertaken in the same way.

Full-scale test data may be the basis for train and tunnel acceptance and homologation.

Each single train/tunnel combination is described by a train-tunnel-pressure signature.

### 4.2 Train-tunnel-pressure signature

#### 4.2.1 General

The static pressure in the tunnel as shown in Figure 1 develops as follows when a train enters the tunnel:

- there is a sharp first increase in pressure  $\Delta p_N$  caused by the entry of the nose of the train into the tunnel;
- there is a second increase in pressure  $\Delta p_{fr}$  due to friction effects caused by the entry of the main part of the train into the tunnel;
- there is then a drop in pressure  $\Delta p_T$  caused by the entry of the tail of the train in the tunnel;
- there is a sharp drop in pressure  $\Delta p_{HP}$  caused by the passing of the train head at the measurement position in the tunnel.

## EN 14067-5:2006+A1:2010 (E)

Real measurements of pressure may differ from the idealised signature shown in Figure 1, for instance if the train cross sectional area varies along the train. In such a case special consideration shall be given to determining the individual  $\Delta p$  values.

All  $\Delta p$  values are to be considered as absolute values.

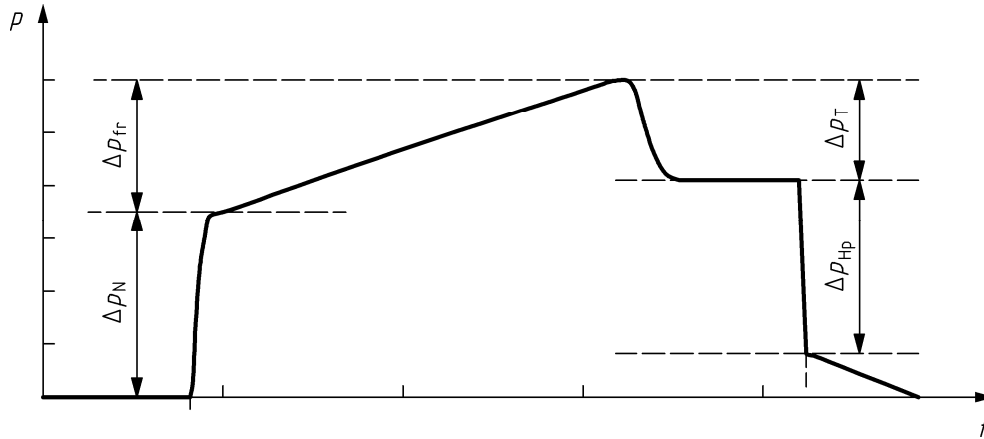


Figure 1 — Train-tunnel-pressure signature at a fixed position in a tunnel (detail)

The following methods are suitable for characterising the aerodynamic quality of a train in a tunnel.

The train-tunnel-pressure signature can be derived from calculations or measurements at a fixed position in a tunnel, i.e. the four pressure changes  $\Delta p_N$ ,  $\Delta p_{fr}$ ,  $\Delta p_T$  and  $\Delta p_{HP}$  at a given point in the tunnel (see 4.2.2).

#### 4.2.2 Full scale measurement of $\Delta p_N$ , $\Delta p_{fr}$ , $\Delta p_T$ and $\Delta p_{HP}$ at a fixed location in the tunnel

The tunnel should have constant cross section, no airshafts and no residual pressure waves. Ideally there should be no initial air flow in the tunnel. However, if there is, its influence on the measurements should be checked.

Pressures are measured using transducers in the tunnel. These should be calibrated prior to use over the expected pressure range, typically  $\pm 4$  kPa. The measurement error should be less than 1 %.

The speed of the train shall be known within an accuracy of 1 % and should be constant during the entry into the tunnel within 1 %.

Data should be sampled at a rate of at least  $5 v_{tr}/L_N$  Hz, with anti-aliasing filters with a cut-off frequency of one quarter of the sampling rate.

In order to obtain precise values of  $\Delta p_N$ ,  $\Delta p_{fr}$ ,  $\Delta p_T$  and  $\Delta p_{HP}$  for a fully developed wave pattern, it is necessary to ensure the following conditions when the train speed  $v_{tr}$  and the length of the train  $L_{tr}$  are given:

- the distance  $x_p$  between the entrance portal and the measuring position is

$$x_p = \frac{cL_{tr}}{c - v_{tr}} + \Delta x_1 \quad (1)$$

where the additional distance  $\Delta x_1$  ensures a good temporal separation of the individual pressure variations and ideally should be about 100 m. The measuring system should be installed at  $x_p$  to avoid wave damping effects;

- the minimum tunnel length is



$$L_{tu,min} = x_p + \frac{cL_{tr}}{2v_{tr}} + \Delta L_1 \quad \text{if } \Delta p_{HP} \text{ is not needed} \quad (2)$$

$$L_{tu,min} = \frac{x_p}{2} \left( 1 + \frac{c}{v_{tr}} \right) + \Delta L_1 \quad \text{if } \Delta p_{HP} \text{ is needed} \quad (3)$$

where the additional length  $\Delta L_1$  ensures a good temporal separation of the individual pressure variations and ideally should be about 150 m.

#### 4.2.3 Full scale measurements of $\Delta p_{N,o}$ , $\Delta p_{fr,o}$ and $\Delta p_{T,o}$ on the exterior of the train


If it is not possible to carry out measurements at fixed locations in a tunnel,  $\Delta p_N$ ,  $\Delta p_{fr}$  and  $\Delta p_T$  can be approximated by measurements of  $\Delta p_{N,o}$ ,  $\Delta p_{fr,o}$  and  $\Delta p_{T,o}$  on the exterior of the train. If needed,  $\Delta p_{HP}$  can be derived either from predictive formulae or assumed to be equal to  $\Delta p_{N,o}$ .

The tunnel shall have constant cross section, no airshafts and no residual pressures waves. Ideally there should be no initial air flow in the tunnel. However, if there is, its influence on the measurements should be checked.

Pressures are measured using transducers on the exterior of the train. These should be calibrated prior to use over the expected pressure range, typically  $\pm 4$  kPa. The measurement error should be less than 1 %.

The speed of the train shall be known within an accuracy of 1 % and should be constant during the entry into the tunnel within 1 %.

Data should be sampled at a rate of at least  $5 v_{tr}/L_N$  Hz, with anti-aliasing filters with a cut-off frequency of one quarter of the sampling rate.

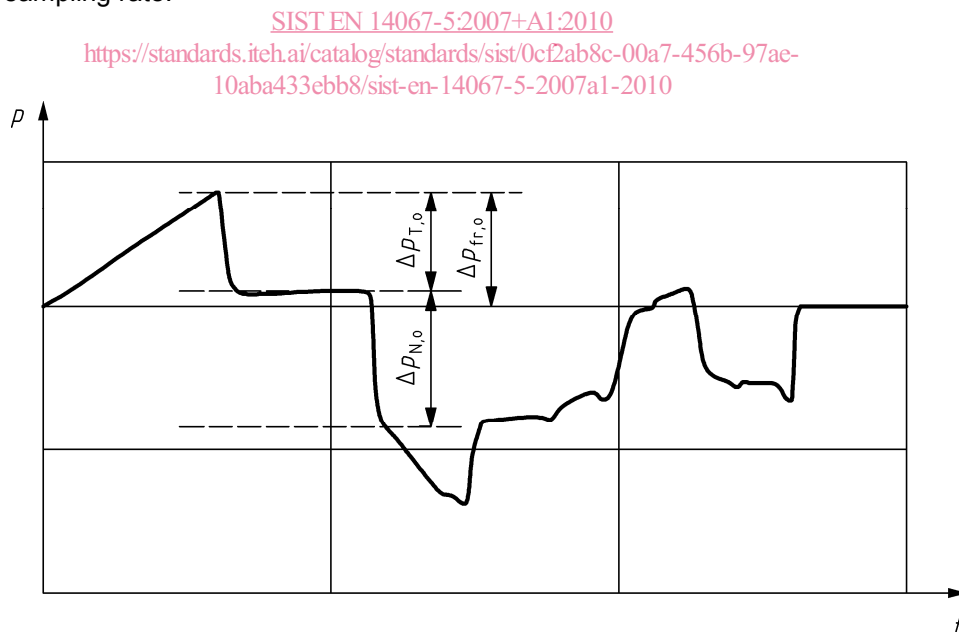

**Figure 2 — Train-tunnel-pressure signature at an exterior position just behind the nose of the train**

To get the whole friction pressure rise  $\Delta p_{fr}$  it is necessary to measure the pressures on the outside of the train just behind the nose at a position where the full cross section is reached.

The minimum tunnel length  $L_{tu,min}$  is

**EN 14067-5:2006+A1:2010 (E)**

$$L_{tu,min} = \frac{L_{tr}}{2} \frac{c}{v_{tr}} \left( \frac{c+v_{tr}}{c-v_{tr}} \right) + \Delta L_2 \quad (4)$$

where the additional length  $\Delta L_2$  ensures a good temporal separation of the individual pressure variations and ideally should be about 200 m.

As the tunnel length reduces the amplitude of the first reflection of the head wave  $\Delta p_{N,0}$  by friction, the tunnel should not be much longer than  $L_{tu,min}$ .

**4.2.4 Predictive formulae for  $\Delta p_N$ ,  $\Delta p_{fr}$ ,  $\Delta p_T$  and  $\Delta p_{HP}$** 

Estimates for  $\Delta p_N$ ,  $\Delta p_{fr}$ ,  $\Delta p_T$  and  $\Delta p_{HP}$  can be made using the equations given in Annex A, A.2 and A.3. For tunnels with varying cross section the smallest cross section shall be considered.

**4.2.5 Assessment of  $\Delta p_N$ ,  $\Delta p_{fr}$ ,  $\Delta p_T$  and  $\Delta p_{HP}$  by numerical simulation**

Calculations can be done with validated numerical methods. Tunnel length and measurement position shall be derived from Equations (1), (2) and (3).

**4.2.6 Reduced scale measurement of  $\Delta p_N$ ,  $\Delta p_{fr}$ ,  $\Delta p_T$  and  $\Delta p_{HP}$  at a fixed location in the tunnel**

Models of the test train should be constructed which accurately represent the train head and tail, and have a good representation of the bogies, intercar gaps and train exterior surface features (e.g. roughness, shape). The test models shall be at scale 1/25 or larger for the test train to ensure that Reynolds number effects are minimised. It is essential that the full-scale train Mach number is respected.

With scaled tunnel and train models, the pressure waves in the tunnel will reproduce those at full-scale, except that the time base will be decreased by model scale. For instance, in a 1/25 scale test, all the pressure waves will occur on a time base 25 times faster than at full-scale.

In most cases it is not practicable to use models which represent the full scale train length. A train model consisting of the leading and end cars, with two intermediate coaches is a minimum for this purpose. The frictional part of the pressure signature for these reduced length models reproduces the full pressure rise, as long as the full scale length is accounted for by extrapolation. The use of shorter train models will produce conservative values for  $\Delta p_T$  and  $\Delta p_{HP}$ .

The tunnel model shall be rigid and very well sealed onto the test rig bed to ensure that no reduction of pressure wave amplitude occurs. The minimum tunnel length and measurement position shall respect the dimensions given in 4.2.2 scaled by the model scale.

Pressures are measured using transducers in the tunnel. These should be calibrated prior to use over the expected pressure range, typically  $\pm 4$  kPa. The measurement error should be less than 1 %.

The speed of the train shall be known within an accuracy of 1 % and should be constant during the entry into the tunnel within 1 %.

Data should be sampled at a rate of at least  $5 v_{tr}/L_{N,model}$  Hz, with anti-aliasing filters with a cut-off frequency of one quarter of the sampling rate.

**4.3 Maximum pressure changes**

The maximum pressure change (peak-to-peak)  $\Delta p_{max}$  under worst case conditions (e.g. critical tunnel length, critical crossing or parallel running, critical location) are given by the following equations.

At a fixed location in a tunnel for a 2 train situation: 
$$\Delta p_{max} = 2\Delta p_N + 2\Delta p_{fr} + 2\Delta p_T + 2\Delta p_{HP} \quad (5)$$

(crossing or parallel running)

At a fixed location in a tunnel for a 1 train situation: 
$$\Delta p_{\max} = \Delta p_N + \Delta p_{fr} + \Delta p_T + \Delta p_{HP} \quad (6)$$

Onboard a train in a 2 train crossing situation: 
$$\Delta p_{\max} = 2\Delta p_N + 2\Delta p_{fr} + 2\Delta p_T + \Delta p_{HP} + \Delta p_{alt} \quad (7)$$

Onboard a train in a 1 train situation: 
$$\Delta p_{\max} = \Delta p_N + \Delta p_{fr} + \Delta p_T + \Delta p_{alt} \quad (8)$$

where

$$\Delta p_{alt} = g\rho_0|\Delta h| \quad (9)$$

is the natural pressure variation due to the difference in altitude

where

$$\rho_0 = 1,225 \text{ kg/m}^3$$

$\Delta h$  is the difference between maximum and minimum altitudes in the tunnel.

The maximum pressure variations are useful information for comparison with TSI and national pressure limits and for load estimates.


## iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST EN 14067-5:2007+A1:2010](https://standards.iteh.ai/catalog/standards/sist/0c2ab8c-00a7-456b-97ae-10aba433ebb8/sist-en-14067-5-2007a1-2010)

<https://standards.iteh.ai/catalog/standards/sist/0c2ab8c-00a7-456b-97ae-10aba433ebb8/sist-en-14067-5-2007a1-2010>

## 5 Pressure loading on unsealed crossing trains

When the head of a train passes another train a pressure drop occurs, which travels with the relative speed of the trains (see Figure 3). A pressure increase happens when the tail passes. The gradient of these pressure changes may be much steeper than the gradients of the train induced pressure waves. Due to this steepness these pressure changes may lead to the loading of unsealed vehicles.

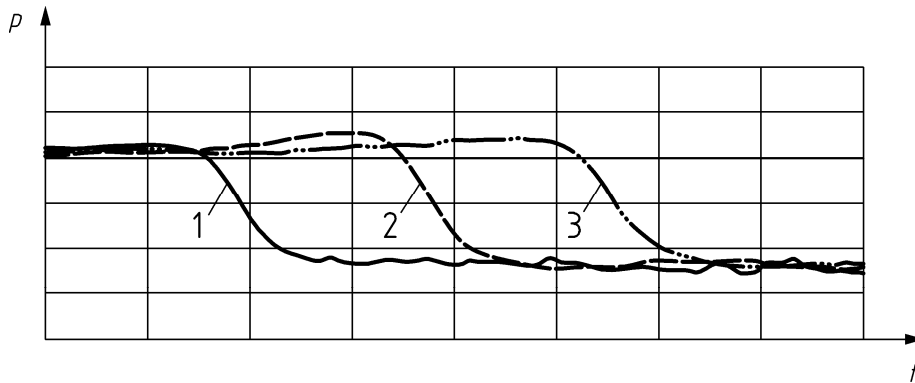


### Key

- 1 external pressure at the front
- 2 external pressure in the middle
- 3 external pressure at the rear

**Figure 3 — External pressure drop due to the head passage of a crossing train**

When the head of the opposing train passes the front of the unsealed vehicle the internal pressure starts to decrease too. As the information about the pressure drop travels with the speed of sound inside the vehicle, the internal pressure is nearly independent of the location inside the vehicle (see Figure 4).

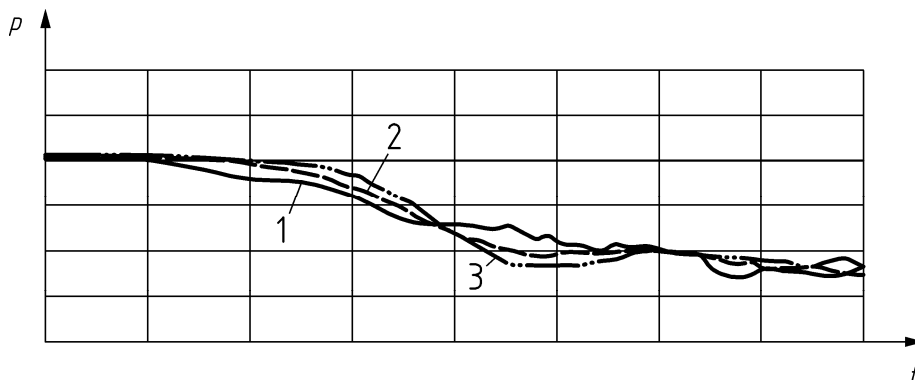

### Key

- 1 internal pressure at the front
- 2 internal pressure in the middle
- 3 internal pressure at the rear

**Figure 4 — Internal pressure evolution inside an unsealed vehicle due to the head passage of a crossing train**