



# SLOVENSKI STANDARD

## SIST EN 15306:2014

01-marec-2014

Nadomešča:  
SIST EN 15306:2007

---

**Podloge za zunanje športne dejavnosti - Izpostavljenost umetne travnate podloge simulirani obrabi**

Surfaces for outdoor sports areas - Exposure of synthetic turf to simulated wear

Sportböden für den Außenbereich - Simulierter Verschleiß von Kunststoffrasenflächen

Sols sportifs d'extérieur - Exposition du gazon synthétique à l'usure simulée

**Ta slovenski standard je istoveten z: EN 15306:2014**

SIST EN 15306:2014  
http://www.sist.si/standards/standards/15306-411f-8c04-63aa0c1c5b77/sist-en-15306-2014

---

**ICS:**

97.220.10      Športni objekti                                      Sports facilities

**SIST EN 15306:2014**                                      en,fr,de

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[SIST EN 15306:2014](#)

<https://standards.iteh.ai/catalog/standards/sist/153e4e09-cd60-411f-8c04-63aa0c1c5b77/sist-en-15306-2014>

EUROPEAN STANDARD

EN 15306

NORME EUROPÉENNE

EUROPÄISCHE NORM

January 2014

ICS 97.220.10

Supersedes EN 15306:2007

English Version

## Surfaces for outdoor sports areas - Exposure of synthetic turf to simulated wear

Sols sportifs d'extérieur - Exposition du gazon synthétique à l'usure simulée

Sportböden für den Außenbereich - Simulierter Verschleiß von Kunststoffrasenflächen

This European Standard was approved by CEN on 17 November 2013.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.

[SIST EN 15306:2014](https://standards.iteh.ai/catalog/standards/sist/153e4e09-cd60-411f-8c04-63aa0c1c5b77/sist-en-15306-2014)

<https://standards.iteh.ai/catalog/standards/sist/153e4e09-cd60-411f-8c04-63aa0c1c5b77/sist-en-15306-2014>



EUROPEAN COMMITTEE FOR STANDARDIZATION  
COMITÉ EUROPÉEN DE NORMALISATION  
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

**Contents**

Page

Foreword.....	3
1 Scope .....	4
2 Principle .....	4
3 Apparatus .....	4
3.1 Wear simulator .....	4
3.2 Stud inspection and replacement .....	8
4 Test pieces .....	8
5 Procedure .....	8
5.1 Conditioning.....	8
5.2 Test.....	8
6 Evaluation and expression of results .....	9
6.1 Change of appearance .....	9
6.2 Test of sports functional characteristics .....	9
7 Test report .....	9
Bibliography .....	10

**ITeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[SIST EN 15306:2014](https://standards.iteh.ai/catalog/standards/sist/153e4e09-cd60-411f-8c04-63aa0c1c5b77/sist-en-15306-2014)

<https://standards.iteh.ai/catalog/standards/sist/153e4e09-cd60-411f-8c04-63aa0c1c5b77/sist-en-15306-2014>

## Foreword

This document (EN 15306:2014) has been prepared by Technical Committee CEN/TC 217 "*Surfaces for sports areas*", the secretariat of which is held by AFNOR.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by July 2014, and conflicting national standards shall be withdrawn at the latest by July 2014.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

This document supersedes EN 15306:2007.

In comparison with the previous edition, the test method has been revised to more precisely define the design of the studded roller used within the test equipment. In particular, the positioning of the studs on the conditioning roller is now precisely specified.

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

ITEH STANDARD PREVIEW  
(standards.iteh.ai)

SIST EN 15306:2014

<https://standards.iteh.ai/catalog/standards/sist/153e4e09-cd60-411f-8c04-63aa0c1c5b77/sist-en-15306-2014>

**EN 15306:2014 (E)****1 Scope**

This European Standard specifies a method for conditioning synthetic turf and needle-punch surfaces by simulating interaction between a sports shoe and sports surface, to allow changes in appearance and to allow sports functional characteristics to be measured.

NOTE The method specified is commonly known as the Lisport method.

**2 Principle**

A test piece is laid on a metal support.

Two cylinders equipped with studs move linearly along the surface of the test piece. The two cylinders roll on the surface and a mechanical system between the cylinders causes a sliding movement of one of the cylinders. Depending on the configuration of the machine, the support might have a movement transverse to the linear movement of the cylinders.


**3 Apparatus****3.1 Wear simulator**

Comprised of two cylinders, each having a length of at least 300 mm and a diameter without any test profile of  $(118 \pm 5)$  mm (see Figure 1).

One roller shall rotate at a circumferential speed as close as possible to the speed of the carriage (allowing for frictional losses). The second roller shall rotate  $40 \pm 3$  % slower than the first. The rollers shall be mounted so the roller rotating more slowly is the leading roller (the first to contact the sample).

NOTE 1 The ratio of rollers speeds can be obtained using gear ratios of 1:1.75.

The linear speed for each cycle of movement, to and fro, shall be  $(0,25 \pm 0,05)$  m/s. A mechanical system to count the number of cycles shall be provided. The wear simulator shall be arranged so that interrupted movement, i.e. the cylinders stop rotating, slip and then start rotating again (slip stick), is avoided. To avoid studs continually impacting the same spots, free movement of the cylinders shall occur at the end of a cycle, or the slip shall change from time to time within the tolerances of the ratio of rotation and/or transverse movement of the sample tray shall occur. When transverse movement occurs the distance travelled during each cycle of transverse movement shall be  $(20 \pm 1)$  mm at a speed of  $(0,015 \pm 0,005)$  m/s.

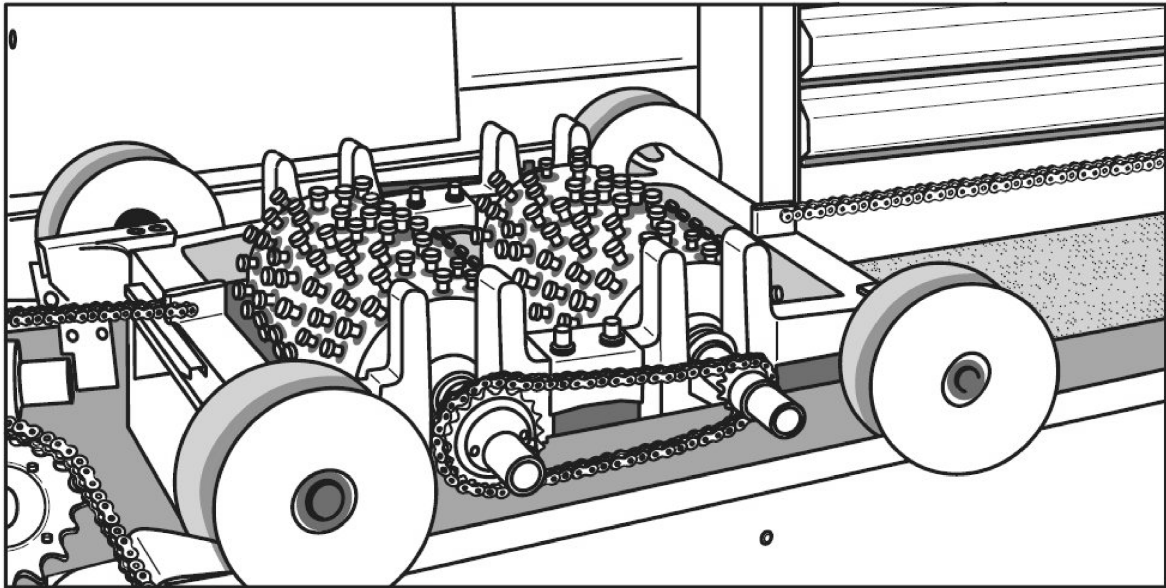

**Figure 1 — Wear simulator**

Mounted to the rollers shall be a test sole as specified in the product specification.

The standard studded test sole shall be comprised of  $(145 \pm 5)$  studs<sup>1)</sup>. The studs shall be as shown in Figure 3, be manufactured from plastic and have a Shore A hardness of  $(96 \pm 2)$ . The mass of the roller all the gears and chains that contribute to the load on the sample  $(28\ 500 \pm 500)$  g for a 300 mm wide roller. If wider rollers are used the mass shall be increased proportionally.

[SIST EN 15306:2014](#)

The studs shall not be mounted linearly on the cylinders but shall be mounted so that the studs and their movement form a low frequency sine wave, to ensure that the wear area of the sample is uniform. Their pattern of the studs shall be as shown in Figure 2. The location of the mounting positions of each stud shall be as detailed in Table 1.

NOTE 2 A manufacturing tolerance of  $\pm 1$  mm for the stud positions has been found satisfactory.

1) 13 mm nylon studs supplied by Decathlon Group are an example of suitable products available commercially. This information is given for the convenience of users of this European Standard and does not constitute an endorsement by CEN of this product.

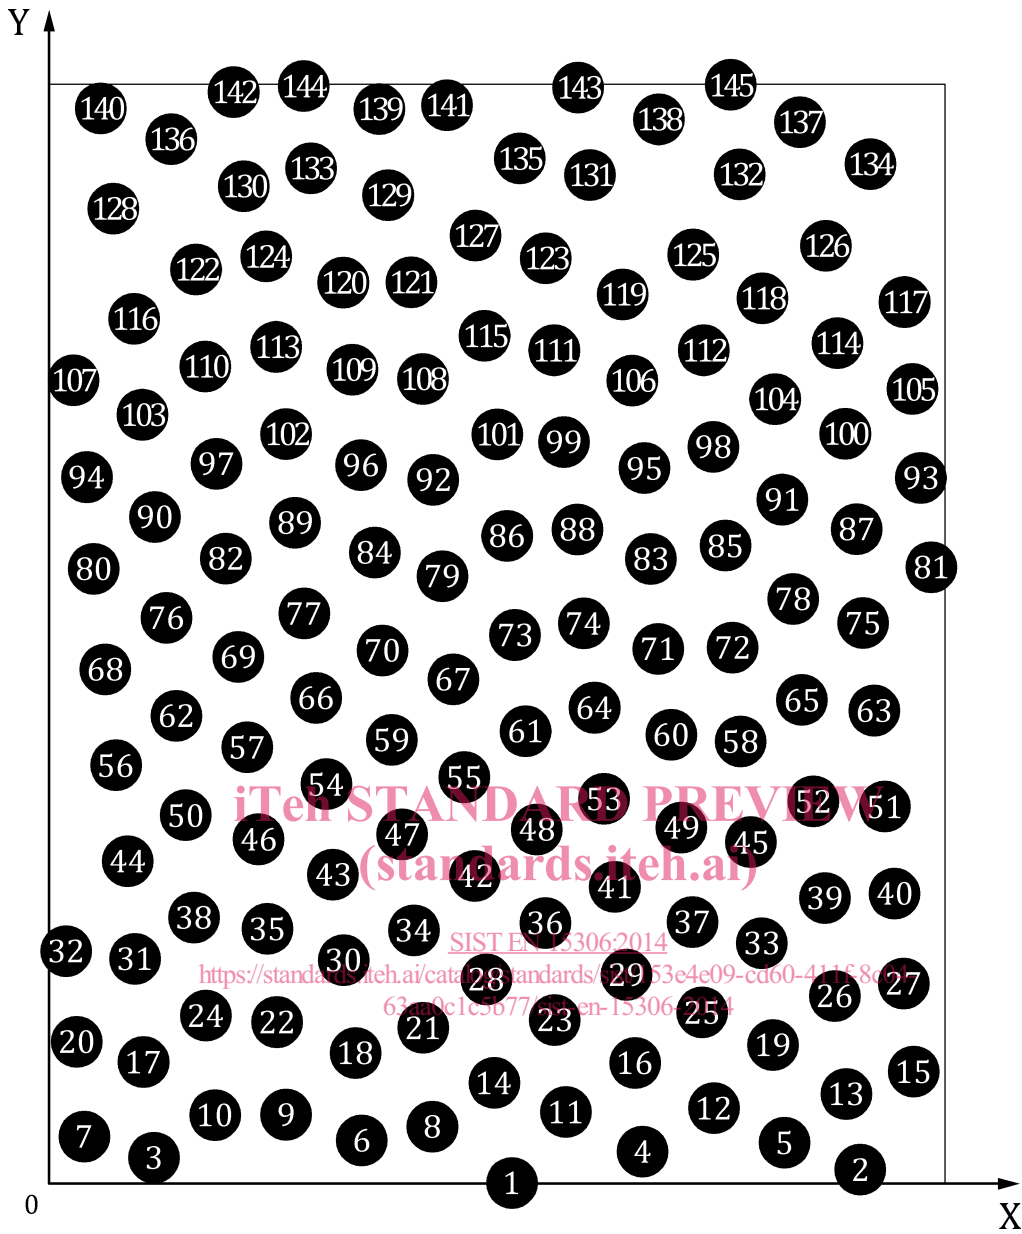


Figure 2 — Pattern of studs



Table 1 — Coordinates of stud positions (centre of stud)

STUD - X AXIS - Y AXIS			STUD - X AXIS - Y AXIS			STUD - X AXIS - Y AXIS		
	mm	mm		mm	mm		mm	mm
1	154,5	0,0	51	279,5	127,5	101	150,0	252,5
2	271,5	4,5	52	255,5	128,5	102	78,5	252,5
3	35,0	8,5	53	185,5	129,5	103	31,0	259,0
4	198,5	10,5	54	92,5	134,5	104	242,5	264,5
5	246,0	13,5	55	139,0	136,5	105	289,0	268,0
6	105,0	14,0	56	22,0	141,0	106	195,0	270,5
7	11,5	16,0	57	65,5	146,5	107	7,5	271,0
8	128,5	19,0	58	231,5	149,0	108	125,0	271,0
9	79,0	23,0	59	114,5	149,5	109	101,0	274,5
10	55,0	23,0	60	208,0	151,0	110	51,5	275,5
11	173,0	24,0	61	159,5	152,5	111	169,5	280,5
12	222,0	25,0	62	42,0	157,5	112	219,0	280,5
13	267,0	30,0	63	276,0	158,5	113	76,0	282,0
14	149,0	33,5	64	182,5	160,0	114	263,5	284,0
15	289,5	37,0	65	252,5	162,5	115	145,5	285,0
16	196,0	40,0	66	89,0	164,0	116	28,0	291,5
17	31,0	41,0	67	135,0	170,0	117	286,0	297,0
18	102,0	43,5	68	18,5	173,0	118	239,0	298,5
19	242,0	46,0	69	63,0	177,5	119	192,0	300,0
20	8,5	47,0	70	111,0	179,5	120	98,0	304,0
21	125,0	52,5	71	204,5	180,0	121	121,0	304,0
22	76,0	54,0	72	229,0	180,5	122	48,5	308,0
23	169,0	55,0	73	155,5	184,5	123	166,0	312,0
24	52,0	56,0	74	178,5	188,5	124	72,0	312,5
25	218,5	57,5	75	272,5	189,0	125	215,0	313,5
26	263,0	63,0	76	38,5	190,5	126	260,0	316,0
27	286,0	67,0	77	85,0	192,5	127	142,0	319,5
28	146,0	68,5	78	249,0	196,5	128	21,0	329,0
29	193,0	70,5	79	131,5	204,5	129	113,0	333,0
30	98,5	75,0	80	14,5	207,0	130	64,5	336,0
31	28,0	75,5	81	294,5	208,0	131	180,0	340,0
32	5,5	78,0	82	58,5	210,5	132	231,0	340,0
33	239,0	81,0	83	201,0	210,5	133	87,0	342,5
34	122,0	85,0	84	108,5	212,5	134	275,0	343,5
35	73,0	85,5	85	226,0	215,0	135	157,5	345,5
36	166,0	88,0	86	153,0	218,0	136	40,0	352,0
37	215,0	88,0	87	270,0	220,0	137	251,0	357,5
38	48,5	89,5	88	176,5	220,5	138	204,0	358,5
39	259,5	96,0	89	82,0	222,5	139	110,0	362,5
40	283,0	97,5	90	34,5	224,5	140	16,5	362,5
41	189,0	100,0	91	246,0	231,0	141	133,0	363,5
42	142,0	103,0	92	128,5	237,5	142	61,0	368,0
43	94,5	104,0	93	292,0	237,5	143	177,5	369,0
44	25,5	109,0	94	12,0	238,5	144	84,5	370,0
45	235,0	114,5	95	199,0	241,0	145	228,0	370,0
46	69,5	116,0	96	104,0	242,0			
47	118,5	117,5	97	55,0	243,0			
48	162,5	119,5	98	222,0	248,0			
49	211,5	119,5	99	172,5	250,0			
50	46,0	123,5	100	266,5	252,5			