
**Industrial automation systems and
integration — Product data
representation and exchange —**

Part 224:

**Application protocol: Mechanical product
definition for process planning using
machining feature**

*Systèmes d'automatisation industrielle et intégration — Représentation
et échange de données de produits —*

*Partie 224: Protocole d'application: Définition de produits mécaniques
pour la planification de procédés utilisant des caractéristiques d'usinage*

ISO 10303-224:2006

<https://standards.iteh.ai/catalog/standards/iso/e320d8ab-cb2b-4d78-8358-cbbe625ab78e/iso-10303-224-2006>



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

[ISO 10303-224:2006](https://standards.iteh.ai/catalog/standards/iso/e320d8ab-cb2b-4d78-8358-cbbe625ab78e/iso-10303-224-2006)

<https://standards.iteh.ai/catalog/standards/iso/e320d8ab-cb2b-4d78-8358-cbbe625ab78e/iso-10303-224-2006>

© ISO 2006

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

1 Scope.....	1
2 Normative references	2
3 Terms, definitions, and abbreviations	4
3.1 Terms defined in ISO 1101	4
3.2 Terms defined in ISO 5459	4
3.3 Terms defined in ISO 10303-1	4
3.4 Terms defined in ISO 10303-31	5
3.5 Terms defined in ISO 10303-42	5
3.6 Terms defined in ISO 10303-240	5
3.7 Other definitions.....	5
3.8 Abbreviations	6
4 Information requirements.....	6
4.1 Units of functionality	7
4.1.1 design_exception.....	8
4.1.2 feature_definition_item	8
4.1.3 feature_profile	10
4.1.4 library_reference	10
4.1.5 manufacturing_feature.....	11
4.1.6 manufacturing_part_properties	14
4.1.7 manufacturing_process_control_documentation.....	15
4.1.8 manufacturing_process_requirement_documents	16
4.1.9 measurement_limitations.....	16
4.1.10 part_administration_data	18
4.1.11 part_model.....	18
4.1.12 requisitions	19
4.1.13 shape_representation_for_machining.....	19
4.2 Application objects.....	20
4.3 Application assertions	202
5 Application interpreted model	247
5.1 Mapping specification	247
5.1.1 design_exception UoF.....	248
5.1.2 feature_definition_item UoF	252
5.1.3 feature_profile UoF	296
5.1.4 library_reference UoF	335
5.1.5 manufacturing_feature UoF	342
5.1.6 manufacturing_part_properties UoF	544
5.1.7 manufacturing_process_control_documentation UoF.....	554
5.1.8 manufacturing_process_requirement_documents UoF	562
5.1.9 measurement_limitations UoF	565
5.1.10 part_administration_data UoF.....	609
5.1.11 part_model UoF.....	612
5.1.12 requisitions UoF	623
5.1.13 shape_representation_for_machining UoF.....	626
5.2 AIM EXPRESS short listing.....	642
6 Conformance requirements	706

Annex A (normative) AIM EXPRESS expanded listing	708
Annex B (normative) AIM short names	894
Annex C (normative) Implementation method specific requirements	907
Annex D (normative) Protocol Implementation Conformance Statement (PICS) proforma	908
Annex E (normative) Information object registration	909
Annex F (informative) Application activity model	910
Annex G (informative) Application reference model	935
Annex H (informative) AIM EXPRESS-G	966
Annex J (informative) Computer interpretable listings	997
Annex K (informative) Technical discussions	998
Bibliography	1005
Index	1006

Figures

Figure 1 — Data planning model	xii
Figure 2 — Angle_taper	21
Figure 3 — Angular_dimension_tolerance	22
Figure 4 — Angular_size_dimension_tolerance	23
Figure 5 — Angularity_tolerance for a plane surface	24
Figure 6 — Angularity_tolerance for an axis	25
Figure 7 — Bevel_gear	27
Figure 8 — Bevel_gear with shaft angle, and pitch angle	27
Figure 9 — Bevel_gear with root_angle and tip_angle	28
Figure 10 — Block_base_shape	29
Figure 11 — Catalogue_gear	32
Figure 12 — Catalogue_knurl	33
Figure 13 — Catalogue_marking	34
Figure 14 — Catalogue_thread	34
Figure 15 — Chamfer	35
Figure 16 — Circular_boss	37
Figure 17 — Circular_boss with taper	37
Figure 18 — Circular_closed_profile	38
Figure 19 — Circular_offset_pattern	40
Figure 20 — Circular_omit_pattern	41
Figure 21 — Circular_pattern with rotation	42
Figure 22 — Circular_pattern without rotation	42
Figure 23 — Circular_runout_tolerance	44
Figure 24 — Circularity_tolerance	45
Figure 25 — Complete_circular_path	46
Figure 26 — Compound_feature	47
Figure 27 — Concentricity_tolerance	49
Figure 28 — Conical_hole_bottom	50
Figure 29 — Constant_radius_edge_round	51
Figure 30 — Constant_radius_fillet	52
Figure 31 — Counterbore_hole	53
Figure 32 — Countersunk_hole	54
Figure 33 — Curved_dimension_tolerance	55
Figure 34 — Cutout	57
Figure 35 — Cylindrical_base_shape	58
Figure 36 — Cylindricity_tolerance	59

Figure 37 — Defined_marking	61
Figure 38 — Defined_thread	62
Figure 39 — Diagonal_knurl	65
Figure 40 — Diameter_dimension_tolerance	66
Figure 41 — Diameter_taper	66
Figure 42 — Diamond_knurl	67
Figure 43 — Distance_along_curve_tolerance	70
Figure 44 — Edge_round	71
Figure 45 — Fillet	76
Figure 46 — Flat_hole_bottom	77
Figure 47 — Flat_slot_end_type	78
Figure 48 — Flatness_tolerance	79
Figure 49 — Gear_face_width	81
Figure 50 — Gear_nominal_tooth_depth	81
Figure 51 — Gear_profile_shift	82
Figure 52 — Gear_reference_pressure_angle	83
Figure 53 — Gear_root_fillet_radius	83
Figure 54 — Gear_tip_diameter	84
Figure 55 — General_boss	84
Figure 56 — General_closed_profile	85
Figure 57 — General_open_profile	86
Figure 58 — General_outside_profile	87
Figure 59 — General_path	88
Figure 60 — General_pattern	88
Figure 61 — General_pocket	90
Figure 62 — General_removal_volume	91
Figure 63 — General_revolution for an outer shape	92
Figure 64 — General_revolution for a volume removal	93
Figure 65 — Groove	96
Figure 66 — Helical_gear	98
Figure 67 — Helical_gear left_or_right_hand_tooth	99
Figure 68 — Helical_gear reference_helix_angle	99
Figure 69 — Implicit_base_shape_representation	100
Figure 70 — Knurl	102
Figure 71 — Linear_path	104
Figure 72 — Linear_profile	105
Figure 73 — Linear_profile_tolerance	106
Figure 74 — Location_dimension_tolerance	106
Figure 75 — Manufactured_assembly and Mating_definition	109
Figure 76 — Ngon_base_shape	115
Figure 77 — Ngon_profile	117
Figure 78 — Open_slot_end_type	120
Figure 79 — Outer_diameter	122
Figure 80 — Outer_diameter_to_shoulder	123
Figure 81 — Parallelism_tolerance for a plane	124
Figure 82 — Parallelism_tolerance for an axis	125
Figure 83 — Partial_circular_path	130
Figure 84 — Partial_circular_profile	131
Figure 85 — Perpendicularity_tolerance for a plane	133
Figure 86 — Perpendicularity_tolerance for a axis	133

Figure 87 — Planar_face	137
Figure 88 — Planar_pocket_bottom_condition	142
Figure 89 — Position_tolerance	143
Figure 90 — Protrusion	150
Figure 91 — Radial_dimension_tolerance	150
Figure 92 — Radiused_slot_end_type	151
Figure 93 — Recess	152
Figure 94 — Rectangular_boss	153
Figure 95 — Rectangular_closed_pocket	154
Figure 96 — Rectangular_closed_profile	155
Figure 97 — Rectangular_offset_pattern	156
Figure 98 — Rectangular_omit_pattern	157
Figure 99 — Rectangular_open_pocket	158
Figure 100 — Rectangular_pattern	159
Figure 101 — Revolved_flat	164
Figure 102 — Revolved_round	165
Figure 103 — Rib_top	166
Figure 104 — Round_hole	167
Figure 105 — Rounded_end	168
Figure 106 — Rounded_U_profile	170
Figure 107 — Shape_profile	172
Figure 108 — Slot	175
Figure 109 — Spherical_cap	177
Figure 110 — Spherical_hole_bottom	178
Figure 111 — Spur_gear	179
Figure 112 — Square_U_profile	179
Figure 113 — Step	181
Figure 114 — Straight_knurl	182
Figure 115 — Straightness_tolerance	183
Figure 116 — Surface_profile_tolerance	184
Figure 117 — Symmetry_tolerance	185
Figure 118 — Tee_profile	188
Figure 119 — Thread	190
Figure 120 — Through_bottom_condition	193
Figure 121 — Total_runout_tolerance	197
Figure 122 — Turned_knurl	198
Figure 123 — Vee_profile	200
Figure 124 — Woodruff_slot_end_type	202
Figure F.1 — IDEF0 basic notation	910
Figure F.2 — Mechanical products definition for process planning using machining features	921
Figure F.3 — A0 manufacture mechanical parts	922
Figure F.4 — A1 manage manufacturing process	923
Figure F.5 — A13 manage equipment and materials	924
Figure F.6 — A131 manage inventory	925
Figure F.7 — A2 capture digital product definition	926
Figure F.8 — A21 capture part data definition	927
Figure F.9 — A214 create part model	928
Figure F.10 — A3 generate manufacturing data	929
Figure F.11 — A31 generate process plan	930
Figure F.12 — A311 define resources	931

Figure F.13 — A312 define operator data	932
Figure F.14 — A315 define machine instructions	933
Figure F.15 — A4 operate shop floor	934
Figure G.1 — ARM EXPRESS-G diagram 1 of 30	936
Figure G.2 — ARM EXPRESS-G diagram 2 of 30	937
Figure G.3 — ARM EXPRESS-G diagram 3 of 30	938
Figure G.4 — ARM EXPRESS-G diagram 4 of 30	939
Figure G.5 — ARM EXPRESS-G diagram 5 of 30	940
Figure G.6 — ARM EXPRESS-G diagram 6 of 30	941
Figure G.7 — ARM EXPRESS-G diagram 7 of 30	942
Figure G.8 — ARM EXPRESS-G diagram 8 of 30	943
Figure G.9 — ARM EXPRESS-G diagram 9 of 30	944
Figure G.10 — ARM EXPRESS-G diagram 10 of 30	945
Figure G.11 — ARM EXPRESS-G diagram 11 of 30	946
Figure G.12 — ARM EXPRESS-G diagram 12 of 30	947
Figure G.13 — ARM EXPRESS-G diagram 13 of 30	948
Figure G.14 — ARM EXPRESS-G diagram 14 of 30	949
Figure G.15 — ARM EXPRESS-G diagram 15 of 30	950
Figure G.16 — ARM EXPRESS-G diagram 16 of 30	951
Figure G.17 — ARM EXPRESS-G diagram 17 of 30	952
Figure G.18 — ARM EXPRESS-G diagram 18 of 30	953
Figure G.19 — ARM EXPRESS-G diagram 19 of 30	954
Figure G.20 — ARM EXPRESS-G diagram 20 of 30	955
Figure G.21 — ARM EXPRESS-G diagram 21 of 30	956
Figure G.22 — ARM EXPRESS-G diagram 22 of 30	957
Figure G.23 — ARM EXPRESS-G diagram 23 of 30	958
Figure G.24 — ARM EXPRESS-G diagram 24 of 30	959
Figure G.25 — ARM EXPRESS-G diagram 25 of 30	960
Figure G.26 — ARM EXPRESS-G diagram 26 of 30	961
Figure G.27 — ARM EXPRESS-G diagram 27 of 30	962
Figure G.28 — ARM EXPRESS-G diagram 28 of 30	963
Figure G.29 — ARM EXPRESS-G diagram 29 of 30	964
Figure G.30 — ARM EXPRESS-G diagram 30 of 30	965
Figure H.1 — application context — AIM EXPRESS-G diagram 1 of 30	967
Figure H.2 — product definition — AIM EXPRESS-G diagram 2 of 30	968
Figure H.3 — property definition — AIM EXPRESS-G diagram 3 of 30	969
Figure H.4 — representation — AIM EXPRESS-G diagram 4 of 30	970
Figure H.5 — shape_representation — AIM EXPRESS-G diagram 5 of 30	971
Figure H.6 — shape_aspect — AIM EXPRESS-G diagram 6 of 30	972
Figure H.7 — characterized_object — AIM EXPRESS-G diagram 7 of 30	973
Figure H.8 — geometry topology — AIM EXPRESS-G diagram 8 of 30	974
Figure H.9 — geometric orientation — AIM EXPRESS-G diagram 9 of 30	975
Figure H.10 — curve — AIM EXPRESS-G diagram 10 of 30	976
Figure H.11 — bounded_curve — AIM EXPRESS-G diagram 11 of 30	977
Figure H.12 — surface — AIM EXPRESS-G diagram 12 of 30	978
Figure H.13 — bounded_surface — AIM EXPRESS-G diagram 13 of 30	979
Figure H.14 — topology — AIM EXPRESS-G diagram 14 of 30	980
Figure H.15 — shell — AIM EXPRESS-G diagram 15 of 30	981
Figure H.16 — document — AIM EXPRESS-G diagram 16 of 30	982
Figure H.17 — approval — AIM EXPRESS-G diagram 17 of 30	983

Figure H.18 — person organization — AIM EXPRESS-G diagram 18 of 30	984
Figure H.19 — person organization assignment — AIM EXPRESS-G diagram 19 of 30	985
Figure H.20 — date — AIM EXPRESS-G diagram 20 of 30	986
Figure H.21 — action — AIM EXPRESS-G diagram 21 of 30	987
Figure H.22 — security classification — AIM EXPRESS-G diagram 22 of 30	988
Figure H.23 — units — AIM EXPRESS-G diagram 23 of 30	989
Figure H.24 — measure with unit — AIM EXPRESS-G diagram 24 of 30	990
Figure H.25 — measure qualification and datums — AIM EXPRESS-G diagram 25 of 30	991
Figure H.26 — tolerances — AIM EXPRESS-G diagram 26 of 30	992
Figure H.27 — geometric tolerance — AIM EXPRESS-G diagram 27 of 30	993
Figure H.28 — group and identification assignment — AIM EXPRESS-G diagram 28 of 30	994
Figure H.29 — externally defined item — AIM EXPRESS-G diagram 29 of 30	995
Figure H.30 — attributes — AIM EXPRESS-G diagram 30 of 30	996

Tables

Table B.1 — AIM short names of entities	894
Table K.1 — Summary of 3 rd edition ARM changes	999
Table K.2 — Summary of 3 rd edition AIM changes	1000
Table K.3 — Summary of 3 rd edition changes for gear entity	1003

(<https://standards.iteh.ai>)
Document Preview

[ISO 10303-224:2006](https://standards.iteh.ai/catalog/standards/iso/e320d8ab-cb2b-4d78-8358-cbbe625ab78e/iso-10303-224-2006)

<https://standards.iteh.ai/catalog/standards/iso/e320d8ab-cb2b-4d78-8358-cbbe625ab78e/iso-10303-224-2006>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 10303-224 was prepared by Technical Committee ISO/TC 184, *Industrial automation systems and integration*, Subcommittee SC 4 *Industrial data*.

This third edition of ISO 10303-224 cancels and replaces the second edition (ISO 10303-224:2001), of which it constitutes a technical revision.

ISO 10303 is organized as a series of parts, each published separately. The structure of ISO 10303 is described in ISO 10303-1.

Each part of ISO 10303 is a member of one of the following series: description methods, implementation methods, conformance testing methodology and framework, integrated generic resources, integrated application resources, application protocols, abstract test suites, application interpreted constructs, and application modules. This part is a member of the 200 series.

A complete list of parts of ISO 10303 is available from the Internet:

<<http://www.tc184-sc4.org/titles/>>

Introduction

ISO 10303 is an International Standard for the computer-interpretable representation production information and exchange of product data. The objective is to provide a neutral mechanism capable of describing product data throughout the life cycle of a product, independent from any particular system. The nature of this description makes it suitable not only for neutral file exchange, but also as a basis for implementing and sharing product databases and archiving.

ISO 10303 is organized as a series of parts, each published separately. The parts of ISO 10303 fall into one of the following series: description methods, integrated resources, application protocols, application interpreted constructs, abstract test suites, implementation methods, and conformance testing. The series are described in ISO 10303-1. This part of ISO 10303 is a member of the application protocol series.

ISO 10303-224 specifies an application protocol (AP) for the representation of information needed to produce a mechanical part definition for process planning of a single piece or an assembly of piece parts for machining operations, and specifies the integrated resources necessary to satisfy these requirements.

This application protocol defines the context, scope, and information requirements for the representation of information needed to produce a mechanical part definition. These requirements specify the part identification, tracking, shape, representation of the shape and material data necessary for the definition of a part for process planning. The process planning function in an organization can be assisted a great deal by identifying machining-oriented part shape features, so that the process planner can more readily identify machining tools and processes to manufacture a part.

This application protocol identifies specific characteristics of part shape used in manufacturing. These characteristics are used to define manufacturing features. These shapes can be represented either by machining features defined in this application protocol, or by a boundary representation solid model, shared by other application protocols and used as application interpreted constructs in this part. The purpose of manufacturing features is to facilitate the identification of manufacturing shapes that are human and computer interpretable. Manufacturing features allow information about the shape to be used for decisions in computerized process planning systems.

Information about the part material is supplied so the process planning activity can determine equipment and material requirements. Also supplied is administrative information necessary for tracking customer information, supplier information about the part, and internal control information for the manufacturing operation to support process planning. Tracking of certain administrative information is a component of the iterative process for creating a process plan.

Application protocols provide the basis for developing implementations of ISO 10303 and abstract test suites for the conformance testing of AP implementations.

Clause 1 defines the scope of the application protocol and summarizes the functionality and data covered by the AP. Clause 3 lists the words defined in this part of ISO 10303 and gives pointers to words defined elsewhere. An application activity model that is the basis for the definition of the scope is provided in Annex F. The information requirements of the application are specified in Clause 4 using terminology appropriate to the application. A graphical representation of the information requirements, referred to as the application reference model, is given in Annex G.

Resource constructs are interpreted to meet the information requirements. This interpretation produces the application interpreted model (AIM). This interpretation, given in 5.1, shows the correspondence between

the information requirements and the AIM. The short listing of the AIM specifies the interface to the integrated resources and is given in 5.2. Note that the definitions and EXPRESS provided in the integrated resources for constructs used in the AIM may include select list items and subtypes which are not imported into the AIM. The expanded listing given in Annex A contains the complete EXPRESS for the AIM without annotation. A graphical representation of the AIM is given in Annex H. Additional requirements for specific implementation methods are given in Annex C.

Figure 1 contains the data planning model that provides a high level description of the requirements for this application protocol. This planning model was created from the in-scope data from the activities of the application activity model (AAM) and grouped into logical units of functionality. This planning model is used as a guide in developing the application reference model (ARM).

This edition of this part of ISO 10303 (ISO 10303-224:2006) incorporates modifications that are upwardly compatible with the previous edition, and modifications that are not upwardly compatible with the previous edition. Modifications to EXPRESS specifications are upwardly compatible if:

- the modifications do not result in changes to instances that are encoded according to ISO 10303-21; such instances conform to both the unmodified and modified EXPRESS specifications;
- the modifications do not result in changes to software that conforms to ISO 10303-22 with respect to access to the data content of data structures;
- the modifications do not invalidate mappings to the previous edition of this part of ISO 10303 that are specified in the mapping table of an ISO 10303 application protocol.

Technical modifications are summarized in Annex K.

[ISO 10303-224:2006](https://standards.iteh.ai/catalog/standards/iso/e320d8ab-cb2b-4d78-8358-cbbe625ab78e/iso-10303-224-2006)

<https://standards.iteh.ai/catalog/standards/iso/e320d8ab-cb2b-4d78-8358-cbbe625ab78e/iso-10303-224-2006>

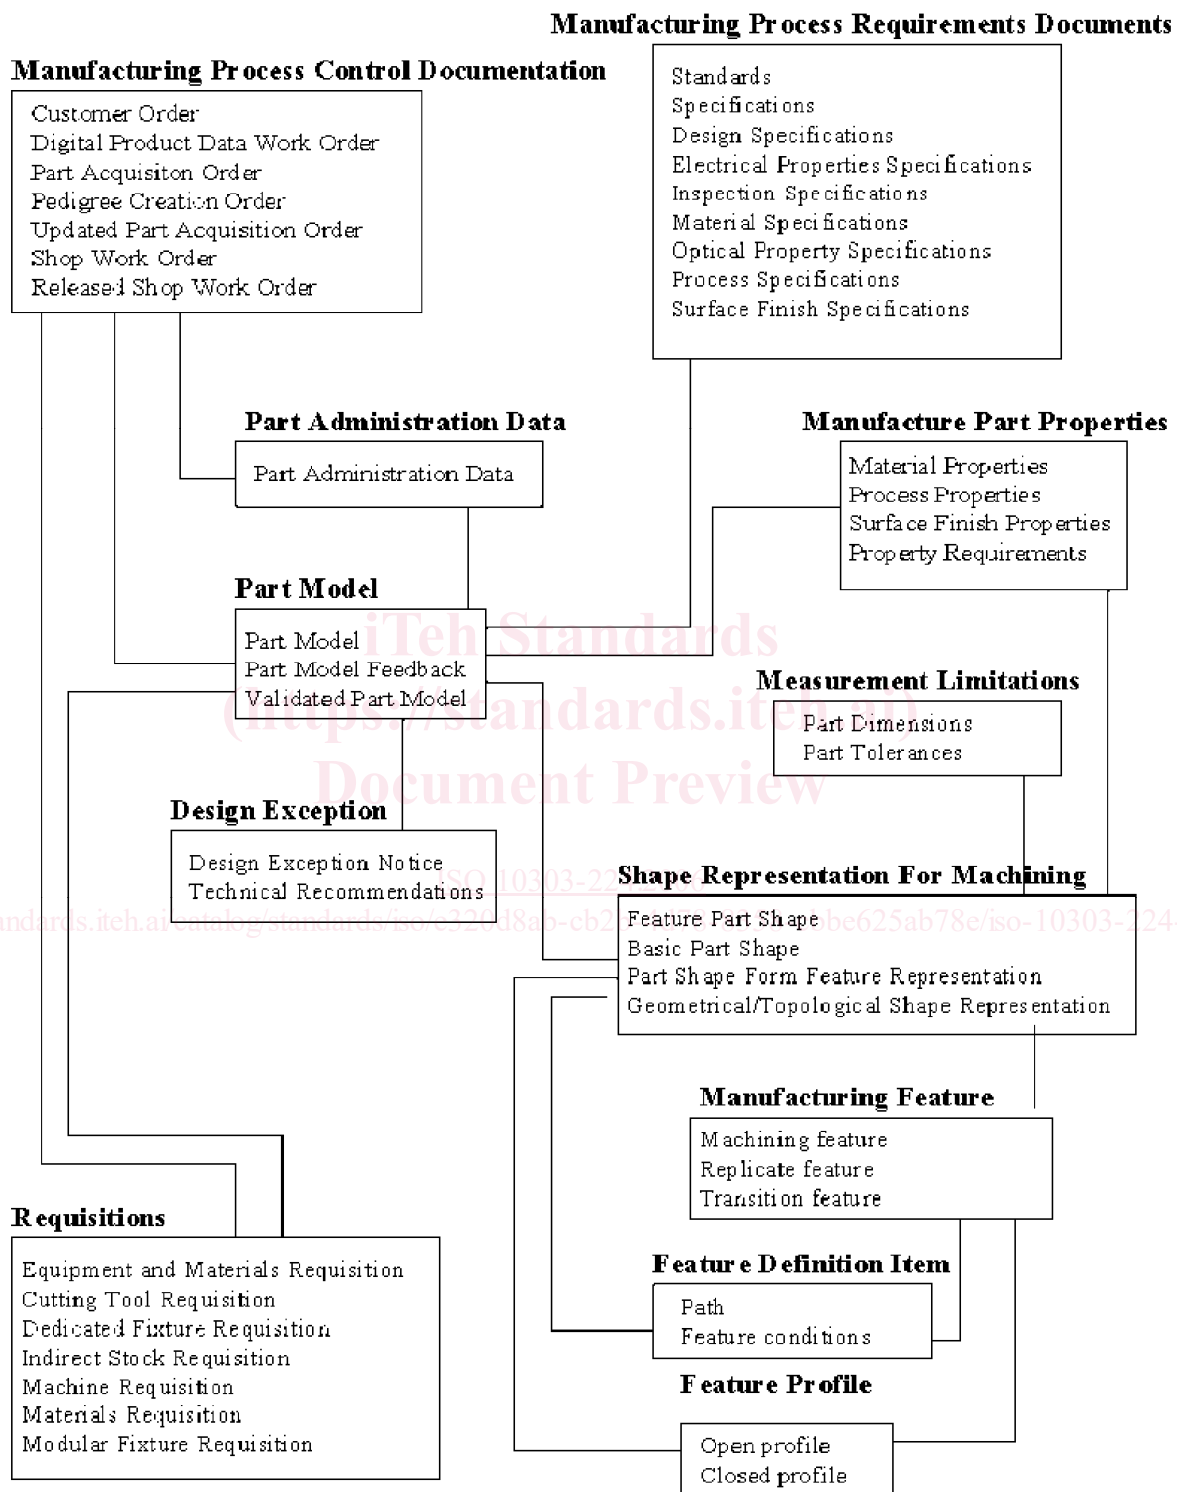


Figure 1 — Data planning model

Industrial automation systems and integration — Product data representation and exchange —

Part 224:

Application protocol: Mechanical product definition for process planning using machining features

1 Scope

This part of ISO 10303 specifies the information requirements for the representation and exchange of information needed to define the product data which is necessary in the manufacturing of a single piece or assembly of mechanical parts. It also specifies the integrated resources necessary to satisfy these requirements. The product data is based on existing part designs whose shapes are represented by machining features. This part of ISO 10303 supports digital representation for computer integrated manufacturing.

NOTE 1 The application activity model in Annex F provides a graphical representation of the process and information flows which form the basis for the definition of the scope of this part of ISO 10303.

The following are within the scope of this part of ISO 10303:

- the manufacture of a single piece mechanical part, and assemblies of single piece parts for manufacturing purposes;
- parts that are to be manufactured by either milling or turning processes;
- machining features for defining shapes necessary for manufacturing;

NOTE 2 The machining feature set is defined in this part of ISO 10303.

- explicit representation of the 3D shape of machining features through bounded geometry representations;
- implicit representation of machining features through selection of standard parameters;
- machining feature definition elements necessary for creating machining form features;
- customer order administrative data to track receipt of an order for a part to the shop floor, but not including tracking of the order on the shop floor;
- approval data to authorize the manufacture of a part;
- requisition administrative data to identify requirements and track the status of materials and equipment needed to manufacture a part;
- work order data to track and identify the status of a part;

- tracking the state of raw stock for documenting the manufacturing history of a part;
- tracking a design exception notice of a part.

NOTE 3 The design exception notice relates to discrepancies in the machining features used to describe a part's shape.

The following are outside the scope of this part of ISO 10303:

- results from process planning functions;
- exchange of data within process planning systems;
- feature order or sequence;
- representation of assemblies for design or bill of materials;
- representation of composite material parts;
- representation of sheet metal parts;
- representation of part pedigree;
- design features of a part;
- schedule for completing a work order through the manufacturing process;
- configuration control for a part.

<https://standards.iteh.ai/catalog/standards/iso/e320d8ab-cb2b-4d78-8358-cbbe625ab78e/iso-10303-224-2006>

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 286-1, *ISO system of limits and fits — Part 1: Bases of tolerances, deviations, and fits*

ISO 286-2, *ISO system of limits and fits — Part 2: Tables of standard tolerance grades and limit deviations for holes and shafts*

ISO 1101:2004, *Geometrical Product Specification (GPS) — Geometrical tolerancing — Tolerances of form, orientation, location and run-out*

ISO 1122-1:1998, *Vocabulary of gear terms — Part 1: Definitions related to geometry*

ISO 1328-1, *Cylindrical gears — ISO system of accuracy — Part 1: Definitions and allowable values of deviations relevant to corresponding flanks of gear teeth*