
**Information technology — Coding of
audio-visual objects —**

**Part 8:
Carriage of ISO/IEC 14496 contents over
IP networks**

iTeh STANDARD PREVIEW

*Technologies de l'information — Codage des objets audiovisuels —
Partie 8: Transport du contenu MPEG-4 sur les réseaux IP*

[ISO/IEC 14496-8:2004](https://standards.iso.org/iso-iec-14496-8-2004)

<https://standards.iteh.ai/catalog/standards/sist/db8e6b65-c215-47e3-8258-cda098239bc5/iso-iec-14496-8-2004>

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO/IEC 14496-8:2004](https://standards.iteh.ai/catalog/standards/sist/db8e6b65-c215-47e3-8258-cda098239bc5/iso-iec-14496-8-2004)

<https://standards.iteh.ai/catalog/standards/sist/db8e6b65-c215-47e3-8258-cda098239bc5/iso-iec-14496-8-2004>

© ISO/IEC 2004

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of the joint technical committee is to prepare International Standards. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

ISO/IEC 14496-8 was prepared by Joint Technical Committee ISO/TC JTC 1, *Information technology*, Subcommittee SC 29, *Coding of audio, picture, multimedia and hypermedia information*.

ISO/IEC 14496 consists of the following parts, under the general title *Information technology — Coding of audio-visual objects*:

- *Part 1: Systems* [ISO/IEC 14496-8:2004](https://standards.iteh.ai/catalog/standards/sist/db8e6b65-c215-47e3-8258-cda098239bc5/iso-iec-14496-8-2004)
- *Part 2: Visual* <https://standards.iteh.ai/catalog/standards/sist/db8e6b65-c215-47e3-8258-cda098239bc5/iso-iec-14496-8-2004>
- *Part 3: Audio*
- *Part 4: Conformance testing*
- *Part 5: Reference software*
- *Part 6: Delivery Multimedia Integration Framework (DMIF)*
- *Part 7: Optimized reference software for coding of audio-visual objects*
- *Part 8: Carriage of ISO/IEC 14496 contents over IP networks*
- *Part 9: Reference hardware description*
- *Part 10: Advanced Video Coding*
- *Part 11: Scene description and application engine*
- *Part 12: ISO base media file format*
- *Part 13: Intellectual Property Management and Protection (IPMP) extensions*
- *Part 14: MP4 file format*
- *Part 15: Advanced Video Coding (AVC) file format*
- *Part 16: Animation Framework eXtension (AFX)*

Introduction

ISO/IEC 14496 is an International Standard designed for the representation and delivery of multimedia information over a variety of transport protocols. It includes interactive scene management, visual and audio representations as well as systems functionality like multiplexing, synchronization, and an object descriptor framework. This document provides a framework for the carriage of ISO/IEC 14496 contents over IP networks and guidelines for designing payload format specifications for the detailed mapping of ISO/IEC 14496 content into several IP-based protocols

iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO/IEC 14496-8:2004](https://standards.iteh.ai/catalog/standards/sist/db8e6b65-c215-47e3-8258-cda098239bc5/iso-iec-14496-8-2004)

<https://standards.iteh.ai/catalog/standards/sist/db8e6b65-c215-47e3-8258-cda098239bc5/iso-iec-14496-8-2004>

Information technology — Coding of audio-visual objects —

Part 8: Carriage of ISO/IEC 14496 contents over IP networks

1 Scope

This part of ISO/IEC 14496 specifies transport level functionalities for the communication of interactive audio-visual scenes. More specifically:

1. Framework for the carriage of ISO/IEC 14496 contents over IP networks;
2. Guidelines to design RTP payload formats for ISO/IEC 14496 contents including fragmentation and concatenation rules;
3. Usage rules of SDP to transport ISO/IEC 14496-1 related information;
4. MIME type definitions for ISO/IEC 14496 contents; and
5. Analysis on RTP Security and Multicasting.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IETF RFC 1889, *RTP A Transport Protocol for Real-Time Applications*

IETF RFC 1890, *RTP Profile for Audio and Video Conference with Minimal Control*

IETF RFC 2326, *Real Time Streaming Protocol (RTSP)*

IETF RFC 2327, *SDP: Session description protocol*

IETF RFC 3016, *RTP payload format for MPEG-4 audio/visual streams*

IETF RFC 3640, *Transport of MPEG-4 elementary streams*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

MIME

Multipurpose Internet Mail Extensions, referring to an official Internet standard that identifies the format of the contents exchanged over different systems connected to the network

3.2

RTP

Real Time Transport Protocol, an Internet protocol used for transport of multimedia data

3.3

RTSP

Real Time Streaming Protocol, an application-level Internet protocol for control over the delivery of data with real-time properties

3.4

RTCP

Real Time Transport Control Protocol, an Internet protocol used to configure RTP packets and to control the transport of RTP packets

3.5

SDP

an Internet protocol used for describing multimedia sessions for the purposes of session announcement, session invitation, and other forms of multimedia session initiation

4 Symbols and abbreviated terms

AAC	Advanced Audio Coding
AU	Access Unit
BIFS	Binary Format for Scene
CELP	Code Excited Linear Prediction
CTS	Composition Time Stamp
ES	Elementary Stream
ESI	Elementary Stream Interface
ESID	Elementary Stream Identifier
FCR	FlexMux Clock Reference
IETF	Internet Engineering Task Force
MIME	Multipurpose Internet Mail Extensions
OCR	Object Clock Reference
OD	Object Descriptor
ODID	Object Descriptor Identifier
QoS	Quality of Service
RFC	Request For Comments
SL	Synchronization Layer
SL-Packet	Synchronization Layer Packet
URL	Universal Resource Locator

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO/IEC 14496-8:2004](https://standards.iteh.ai/catalog/standards/sist/db8e6b65-c215-47e3-8258-cda098239bc5/iso-iec-14496-8-2004)

<https://standards.iteh.ai/catalog/standards/sist/db8e6b65-c215-47e3-8258-cda098239bc5/iso-iec-14496-8-2004>

5 Use of RTP

5.1 Introduction


There are a number of RTP packetization schemes for ISO/IEC 14496 data. Media-aware packetization (e.g. video frames split at recoverable sub-frame boundaries) is a principle in RTP, and thus it is likely that several RTP schemes will be needed, to suit both the different kinds of media — audio, video, etc. — and different encodings (e.g. AAC and CELP audio codecs). This specification does not specify any payload format but do specify a general framework to design and utilize the payload formats in appropriate way.

This specification requires that, no matter what packetization scheme is used, there are a number of common characteristics that all shall have: however, such characteristics depend on the fact that the RTP Session contains a single elementary stream or a flexmux stream.

5.2 Carrying a single elementary stream

In case an RTP Session contains a single elementary stream the following characteristics apply:

- The RTP timestamp corresponds to the presentation time (e.g. CTS) of the earliest AU within the packet.
- RTP packets have sequence numbers in transmission order. The payloads logically or physically have SL Sequence numbers, which are in decoding order, for each elementary stream.
- The ISO/IEC 14496 timescale (clock ticks per second), which is timeStampResolution in the case of ISO/IEC 14496 Systems, shall be used as the RTP timescale, e.g. as declared in SDP for an RTP stream.
- To achieve a base level of interoperability, and to ensure that any ISO/IEC 14496 stream may be carried, all receivers should implement a generic payload format defined in “draft-ietf-avt-mpeg4-multisl-04.txt” as default RTP payload mapping scheme. Any new payload format should be a configurable subset of the generic payload format.
<https://standards.iteh.ai/catalog/standards/sist/db8e6b65-c215-47e3-8258-1b498730bc34/iec-14496-8-2004>
- Streams should be synchronized using RTP techniques (notable RTCP sender reports). When the ISO/IEC 14496 OCR is used, it is logically mapped to the NTP time axis used in RTCP.
- The RTP packetization schemes may be used for ISO/IEC 14496 elementary streams 'standing alone' (e.g. without ISO/IEC 14496 systems, including BIFS); or they may be used within an overall presentation using the object descriptor framework. In the latter case, a SLConfigDescriptor is sent describing the stream. Logically, each RTP stream is passed through a mapping function which is specific to the payload format used; this mapping function yields a SL packetized stream. The SLConfigDescriptor describes this logical stream, not the actual bits in the RTP payload. For example, the RTP sequence number may be used to make the SLPacketHeader sequence number; other SL fields may be set in this way, dynamically, or from static values in the payload specification. For example, as all RTP packets carry a composition time-stamp, the flag in the SL header indicating its presence can normally be statically defined as 'true'. Each payload format for ISO/IEC 14496 content shall specify the mapping function for the formation of the SLConfigDescriptor and the SLPacketHeader. In the case of the RFC 3016, the mapping shall be defined in a separate document.

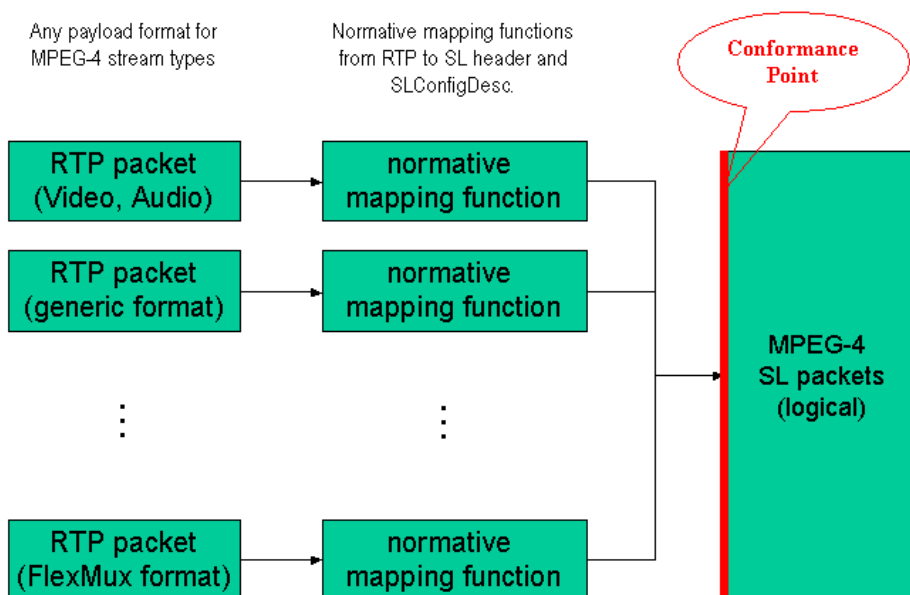

iTeh STANDARD PREVIEW

Figure 1 — RTP packet to SL packet mapping

5.3 Payload format selection

ISO/IEC 14496-8:2004
<https://standards.iteh.ai/catalog/standards/sist/db8e6b65-c215-47e3-8258-cda098239bc5/iso-iec-14496-8-2004>

Other payload formats may be used. They are signalled as dynamic payload IDs, defined by a suitable name (e.g. a payload name in an SDP RTPMAP attribute). In particular, the development of specialized RTP payloads for video (e.g. respecting video packets) and audio (e.g. providing interleave) is expected. It is possible that these schemes can be compatible with the default scheme required here.

There may be a choice of RTP payload formats for a given stream (e.g. as an elementary stream, an SL-packetized stream, using FlexMux, and so on). It is recommended that

- terminals implementing a given subsystem (e.g. video) accept at least an ES and the default SL packings of that stream; for example, this means accepting the RFC 3016 and also the generic payload format for MPEG-4 Visual;
- terminals implementing a given payload format accept any stream over that format for which they have a decoder, even if that packing is not normally the 'best' packing.

5.4 ISO/IEC 14496 QoS considerations

For those streams requiring a certain Quality of Service (specifiable appropriately), the recommendation is to further investigate possible solutions such as the leverage of existing work in the IETF in this area (including, but not limited to FEC, re-transmission, or repetition). However, techniques in data-dependent error correction, or combined source/channel coding solutions make other schemes attractive. Also, it is recommended that requirement such as efficient grouping mechanisms (i.e. the ability to send in a single RTP packet multiple consecutive AUs, each with its own SL information) and low overhead is also taken into account.

6 Usage of SDP attributes

This specification considers only ISO/IEC 14496 Systems related issues. Usage of SDP information for specific payload format shall be specified in each RTP payload format RFCs. The usage of elementary streams in other contexts is not addressed here: codepoints for this case are specified in, and in other places.

This specification currently assumes that any session described by SDP (e.g. in SAP, as a file download, as a DESCRIBE over RTSP) has at most one ISO/IEC 14496 session. It is desirable that this restriction be lifted.

- Senders should alert receivers that an ISO/IEC 14496 session is included, by means of an SDP attribute that is general (i.e. before any "media" lines). This takes the form of the following attribute line:

```
a=mpeg4-iod [<location>]
```

location: In an RTSP session, this is an optional attribute. If not supplied, the IOD is retrieved over the RTSP session by using DESCRIBE with an accept of type application/mpeg4-iod or application/mpeg4-iod-xmt. Where the SDP information is supplied by some other means (e.g. as a file, in SAP), the location is obligatory. The location should be a URL enclosed in double-quotes, which will supply the IOD (e.g. small ones may be encoded using "data:", otherwise "http:" or other suitable file-access URL). When application/mpeg4-iod-xmt type is used, the IOD in XMT format shall be supplied. The InitialObjectDescriptor is defined in subclause 8.6.3.1 of ISO/IEC 14496-1:2001 and its XMT format is defined in subclause 15.8.3. of ISO/IEC 14496-1:2001 AMD2. Any terminals using IOD shall understand binary IOD and may understand textual IOD.

- New encoding names for the a = rtpmap attribute

```
a = rtpmap:<payload> <name>/<time scale>/<parameters>
```

payload is the dynamic payload number. The <name> is defined and documented in the IETF specification for the payload format. [ISO/IEC 14496-8:2004](https://standards.iteh.ai/catalog/standards/sist/db8e6b65-c215-47e3-8258-cdd0782296c9/iso-iec-14496-8-2004)

- It is recommended that, no matter what payload format is used, each media stream be placed in a media section that is appropriate. For example, a payload format which can carry both video and audio streams may be used in sections of SDP starting both with "m=video" and "m=audio". The MIME name for the payload format is thus registered under all applicable branches.

- In case of a single elementary stream, the following attribute is defined:

```
a=mpeg4-esid : a
```

a is the ESID.

- Other SDP attributes should, if used, carry values consistent with those carried in ISO/IEC 14496 systems (for example, bit rate).

7 MIME Types

7.1 Top level MIME Types

- "video" shall be used for MPEG-4 Visual streams (i.e. video as defined in ISO/IEC 14496-2 (Streamtype = 4) and/or graphics as defined in ISO/IEC 14496-1 (Streamtype = 3)) or MPEG-4 Systems streams that convey information needed for an audio/visual presentation.
- "audio" shall be used for MPEG-4 Audio streams (ISO/IEC 14496-3) (Streamtype = 5)) or MPEG-4 Systems streams that convey information needed for an audio only presentation.