# INTERNATIONAL STANDARD



Second edition 2005-05-01

# Paper and board — Testing of cores —

Part 6:

Determination of bending strength by the three-point method

iTeh STAPpier et carton — Essais des mandrins — Partie 6: Détermination de la résistance à la flexion par la méthode des (strois points ds.iteh.ai)

<u>ISO 11093-6:2005</u> https://standards.iteh.ai/catalog/standards/sist/c37e33c0-b13b-4a46-9d7e-8f37c187253a/iso-11093-6-2005



Reference number ISO 11093-6:2005(E)

#### PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

# iTeh STANDARD PREVIEW (standards.iteh.ai)

<u>ISO 11093-6:2005</u> https://standards.iteh.ai/catalog/standards/sist/c37e33c0-b13b-4a46-9d7e-8f37c187253a/iso-11093-6-2005

© ISO 2005

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office Case postale 56 • CH-1211 Geneva 20 Tel. + 41 22 749 01 11 Fax + 41 22 749 09 47 E-mail copyright@iso.org Web www.iso.org Published in Switzerland

# Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 11093-6 was prepared by Technical Committee ISO/TC 6, Paper, board and pulps.

This second edition cancels and replaces the first edition (ISO 11093-6:1996), which has been technically revised.

ISO 11093 consists of the following parts, under the general title Paper and board — Testing of cores:

- Part 1: Sampling ISO 11093-6:2005 https://standards.iteh.ai/catalog/standards/sist/c37e33c0-b13b-4a46-9d7e-
- Part 2: Conditioning of test samples<sup>7</sup>c187253a/iso-11093-6-2005
- Part 3: Determination of moisture content using the oven drying method
- Part 4: Measurement of dimensions
- Part 5: Determination of characteristics of concentric rotation
- Part 6: Determination of bending strength by the three-point method
- Part 7: Determination of flexural modulus by the three-point method
- Part 8: Determination of natural frequency and flexural modulus by experimental modal analysis
- Part 9: Determination of flat crush resistance

# iTeh STANDARD PREVIEW (standards.iteh.ai)

<u>ISO 11093-6:2005</u> https://standards.iteh.ai/catalog/standards/sist/c37e33c0-b13b-4a46-9d7e-8f37c187253a/iso-11093-6-2005

# Paper and board — Testing of cores —

# Part 6: **Determination of bending strength by the three-point method**

## 1 Scope

This part of ISO 11093 specifies a three-point method for the determination of the bending strength of cylindrical board cores which meet the following criteria:

- internal diameter: 50 mm to 300 mm;
- minimum wall thickness: 5 mm;
- minimum test length of core (span): 1 100 mm.

# iTeh STANDARD PREVIEW

# 2 Normative references (standards.iteh.ai)

The following referenced documents are indispensable, for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies. Journal of the reference o

ISO 7500-1, Metallic materials — Verification of static uniaxial testing machines — Part 1: Tension/compression testing machines — Verification and calibration of the force-measuring system

ISO 11093-1, Paper and board — Testing of cores — Part 1: Sampling

ISO 11093-2, Paper and board — Testing of cores — Part 2: Conditioning of test samples

## 3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.


#### 3.1

#### bending strength

maximum resistance of a test piece of given dimensions against bending until breakage under specified conditions

## 4 Principle

The core test piece is considered as a "beam" in the mechanics of material approach. During the test, the test piece is stressed by a vertical force (F) at the midpoint of its length while being supported at each end only (see Figure 1). For the determination of the bending strength, stress is applied until the test piece breaks.

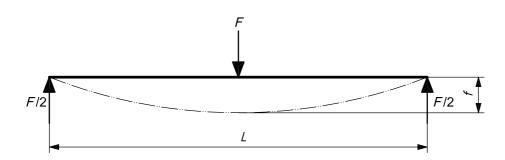

*F* applied force

*L* test length of the core (span)

#### Figure 1 — Three-point method of beam loading

## 5 Apparatus

The following apparatus shall be used.

#### 5.1 Load-testing machine

The load-testing machine shall be capable of applying a load at a constant relative speed of  $(25 \pm 2,5)$  mm/min and shall be calibrated and verified to conform to the requirements of ISO 7500-1.

The switch-off limit for the breaking force  $\Delta F$  for a testing machine with an automatic break detection is defined by

— 30 N, or

3 %

<u>ISO 11093-6:2005</u> https://standards.iteh.ai/catalog/standards/sist/c37e33c0-b13b-4a46-9d7e-8f37c187253a/iso-11093-6-2005


from the true value.

The direction of the load application is perpendicular to the test piece axis and shall be adjusted with an accuracy of  $\pm 1^{\circ}$ .

#### 5.2 Two prism supports

The two prism supports (see Figure 2), shall each have an angle between the two faces supporting the core test piece of  $120^{\circ} \pm 2^{\circ}$ . The length (*l*), parallel to the core length, shall be ( $50 \pm 1$ ) mm. The width (*b*) shall be large enough to allow the core test piece to rest on the supporting faces and not on the outer edges of the prism. The support edges shall be rounded to a radius (*r*) of ( $0,5 \pm 0,1$ ) mm.

The prism support shall be positioned on pivots on each side of the prism, so as to ensure uniform contact of the test piece on the prism and a constant measuring length during the test.

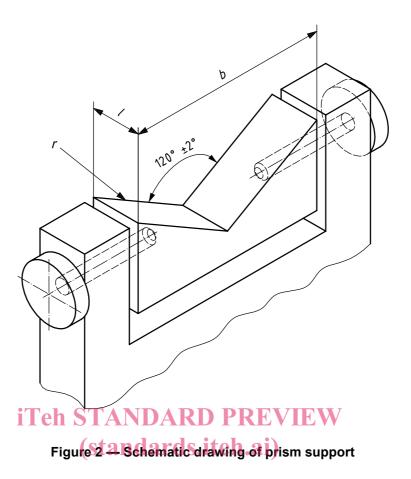

#### 5.3 Load prism

ISO 11093-6:2005

https://standards.iteh.ai/catalog/standards/sist/c37e33c0-b13b-4a46-9d7e-

The load prism is used to apply the load to the core surface and is of the same basic shape and dimensions as the prism supports (5.2), except that its length l (see Figure 2) parallel to the core length L (see Figure 1), shall be (100 ± 1) mm.

## 6 Sampling and preparation

Ensure that the test pieces used are representative of the sample received. If the determination is to represent a lot, the sampling procedure shall be carried out in accordance with ISO 11093-1.

Prepare at least three test pieces such that their lengths are 100 mm greater than the test length of the core, L (see Figure 1).

Condition the test pieces in accordance with ISO 11093-2.

## 7 Procedure

Carry out the test under the same atmospheric conditions as those used to condition the test pieces.

Arrange the test assembly such that the test piece is located centrally on the prism supports to within  $\pm$  5 mm, and the load prism is positioned centrally between the support prisms to within  $\pm$  2 mm and diametrically opposed to them. The distance between the two axes of the support prisms is the test length of the core, *L* (see Figure 1). The test length of the core shall be in accordance with Clause 6 and shall be known to an accuracy of  $\pm$  2 mm.

Apply the load at a constant rate of  $(25 \pm 2,5)$  mm/min until the test piece breaks. Record the maximum load value, in kilonewtons, as the bending strength.

Repeat the test procedure for the remaining test pieces. Calculate the mean bending strength.

## 8 Test report

The test report shall include the following information

- a) a reference to this part of ISO 11093;
- b) complete identification of the samples tested and the sampling method used;
- c) date and place of sampling;
- d) date and place of testing, name and signature of tester;
- e) number of test pieces;
- f) core dimensions, i.e. length, internal diameter, external diameter;
- g) test length of core (L);
- h) individual and average values, expressed in kilonewtons, for bending strength;
- i) any departure from the procedure specified in this part of ISO 11093 and any circumstances that may have affected the results.

<u>ISO 11093-6:2005</u> https://standards.iteh.ai/catalog/standards/sist/c37e33c0-b13b-4a46-9d7e-8f37c187253a/iso-11093-6-2005

# iTeh STANDARD PREVIEW (standards.iteh.ai)

<u>ISO 11093-6:2005</u> https://standards.iteh.ai/catalog/standards/sist/c37e33c0-b13b-4a46-9d7e-8f37c187253a/iso-11093-6-2005