



# SLOVENSKI STANDARD SIST ETS 300 574 E2:2003

01-december-2003

---

9 j fcdg ]`X][ ]HUb]`WV] b]`hY`ca i b] UV]`g ]`g]ghYa `fZUjU&L`E`Ai `h]d`Y\_g]fUb`Y]b  
gcXcglcd`bUfUX]`g ]`dch]`f] GA `\$) '\$&L

Digital cellular telecommunications system (Phase 2) (GSM); Multiplexing and multiple access on the radio path (GSM 05.02)

**iteh STANDARD PREVIEW**  
**(standards.iteh.ai)**

Ta slovenski standard je istoveten z: <sup>SIST ETS 300 574 E2:2003</sup> **ETS 300 574 Edition 2**  
<https://standards.iteh.ai/catalog/standards/sist/71945051-2701-453c-9089-aa5440ccad4b/sist-ets-300-574-e2-2003>

---

**ICS:**

33.040.20	Prenosni sistem	Transmission systems
33.070.50	Globalni sistem za mobilno telekomunikacijo (GSM)	Global System for Mobile Communication (GSM)


**SIST ETS 300 574 E2:2003**

**en**

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST ETS 300 574 E2:2003

<https://standards.iteh.ai/catalog/standards/sist/7f945051-2701-433c-9089-aa5440ecad4b/sist-ets-300-574-e2-2003>

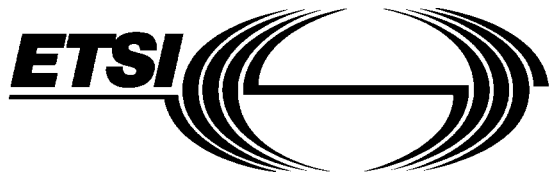

**E**UROPEAN  
**T**ELECOMMUNICATION  
**S**TANDARD

**ETS 300 574**

January 1996

Second Edition

Source: ETSI TC-SMG

Reference: RE/SMG-020502P

ICS: 33.060.50

**Key words:** Digital cellular telecommunications system, Global System for Mobile communications (GSM)



SIST ETS 300 574 E2:2003  
http://standards.iteh.ai/catalog/standards/sist-ets-300-574-e2-2003/aa5440ecad4b/sist-ets-300-574-e2-2003

**Digital cellular telecommunications system (Phase 2);  
Multiplexing and multiple access on the radio path  
(GSM 05.02)**

**ETSI**

European Telecommunications Standards Institute

**ETSI Secretariat**

**Postal address:** F-06921 Sophia Antipolis CEDEX - FRANCE

**Office address:** 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

**X.400:** c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 92 94 42 00 - Fax: +33 93 65 47 16

**Copyright Notification:** No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1996. All rights reserved.

Blank page

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[SIST ETS 300 574 E2:2003](https://standards.iteh.ai/catalog/standards/sist/7945051-2701-433c-9089-aa5440ecad4b/sist-ets-300-574-e2-2003)

<https://standards.iteh.ai/catalog/standards/sist/7945051-2701-433c-9089-aa5440ecad4b/sist-ets-300-574-e2-2003>

## Contents

Foreword .....	5
1 Introduction.....	7
1.1 Scope.....	7
1.2 Normative references .....	7
1.3 Definitions and abbreviations.....	7
2 General.....	7
3 Logical channels.....	8
3.1 General .....	8
3.2 Traffic channels .....	8
3.2.1 General.....	8
3.2.2 Speech traffic channels .....	8
3.2.3 Data traffic channels.....	8
3.3 Control channels.....	8
3.3.1 General.....	8
3.3.2 Broadcast channels.....	9
3.3.2.1 Frequency correction channel (FCCH).....	9
3.3.2.2 Synchronization channel (SCH).....	9
3.3.2.3 Broadcast control channel (BCCH) .....	9
3.3.3 Common control type channels, known when combined as a common control channel (CCCH): .....	10
3.3.4 Dedicated control channels.....	10
3.3.5 Cell Broadcast Channel (CBCH).....	10
3.4 Combination of channels.....	10
4 The physical resource .....	10
4.1 General .....	10
4.2 Radio frequency channels .....	10
4.2.1 Cell allocation and mobile allocation .....	10
4.2.2 Downlink and uplink .....	10
4.3 Timeslots and TDMA frames.....	11
4.3.1 General.....	11
4.3.2 Timeslot number .....	11
4.3.3 TDMA frame number.....	11
5 Physical channels.....	11
5.1 General .....	11
5.2 Bursts.....	12
5.2.1 General.....	12
5.2.2 Types of burst and burst timing .....	12
5.2.3 Normal burst (NB) .....	12
5.2.4 Frequency correction burst (FB).....	13
5.2.5 Synchronization burst (SB).....	13
5.2.6 Dummy burst .....	13
5.2.7 Access burst (AB).....	14
5.2.8 Guard period .....	14
5.3 Physical channels and bursts .....	14
5.4 Radio frequency channel sequence.....	15
5.5 Timeslot and TDMA frame sequence .....	15
5.6 Parameters for channel definition and assignment .....	15
5.6.1 General.....	15
5.6.2 General parameters .....	15
5.6.3 Specific parameters .....	15
6 Mapping of logical channels onto physical channels.....	16

6.1	General .....	16
6.2	Mapping in frequency of logical channels onto physical channels .....	16
	6.2.1 General .....	16
	6.2.2 Parameters .....	16
	6.2.3 Hopping sequence generation .....	16
	6.2.4 Specific cases .....	18
	6.2.5 Change in the frequency allocation of a base transceiver station .....	18
6.3	Mapping in time of logical channels onto physical channels .....	18
	6.3.1 General .....	18
	6.3.2 Key to the mapping table of section 7 .....	18
	6.3.3 Mapping of TCH/F9.6, TCH/F4.8, TCH/H4.8 and TCH/H2.4 .....	19
	6.3.4 Mapping of BCCH data .....	19
	6.3.5 Mapping of SID Frames .....	19
6.4	Permitted channel combinations .....	19
6.5	Operation of channels and channel combinations .....	20
	6.5.1 General .....	20
	6.5.2 Determination of CCCH_GROUP and PAGING_GROUP .....	21
	6.5.3 Determination of specific paging multiframe and paging block index .....	21
	6.5.4 Short Message Service Cell Broadcast (SMSCB) .....	22
History .....		36

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ETS 300 574 E2:2003](#)

<https://standards.iteh.ai/catalog/standards/sist/7f945051-2701-433c-9089-aa5440ecad4b/sist-ets-300-574-e2-2003>

## Foreword

This European Telecommunication Standard (ETS) has been produced by the Special Mobile Group (SMG) Technical Committee (TC) of the European Telecommunications Standards Institute (ETSI).

This ETS defines the physical channels of the radio sub-system required to support the logical channels used within the digital cellular telecommunications system (Phase 2).

This ETS correspond to GSM technical specification, GSM 05.02 version 4.5.0.

The specification from which this ETS has been derived was originally based on CEPT documentation, hence the presentation of this ETS may not be entirely in accordance with the ETSI/PNE rules.

Reference is made within this ETS to GSM Technical Specifications (GSM-TSs) (note).

NOTE: TC-SMG has produced documents which give the technical specifications for the implementation of the European digital cellular telecommunications system. Historically, these documents have been identified as GSM Technical Specifications (GSM-TSs). These TSs may have subsequently become I-ETTs (Phase 1), or ETSS (Phase 2), whilst others may become ETSI Technical Reports (ETRs). GSM-TSs are, for editorial reasons, still referred to in GSM ETSS.

Transposition dates	
Date of adoption of this ETS:	31 January 1996
Date of latest announcement of this ETS (doa):	30 April 1996
Date of latest publication of new National Standard or endorsement of this ETS (dop/e):	31 October 1996
Date of withdrawal of any conflicting National Standard (dow):	31 October 1996

<https://standards.iteh.ai/catalog/standards/sist/7945051-2701-433c-9089-aa5440ecad4b/sist-ets-300-574-e2-2003>

Blank page

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[SIST ETS 300 574 E2:2003](https://standards.iteh.ai/catalog/standards/sist/7945051-2701-433c-9089-aa5440ecad4b/sist-ets-300-574-e2-2003)

<https://standards.iteh.ai/catalog/standards/sist/7945051-2701-433c-9089-aa5440ecad4b/sist-ets-300-574-e2-2003>



## 1 Introduction

### 1.1 Scope

This European Telecommunication Standard (ETS) defines the physical channels of the radio sub-system required to support the logical channels. It includes a description of the logical channels and the definition of frequency hopping, TDMA frames, timeslots and bursts.

### 1.2 Normative references

This ETS incorporates by dated and undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this ETS only when incorporated in it by amendment or revision. For undated references, the latest edition of the publication referred to applies.

- [1] GSM 01.04 (ETR 100): "European digital cellular telecommunication system (Phase 2); Abbreviations and acronyms".
- [2] GSM 03.03 (ETS 300 523): "European digital cellular telecommunication system (Phase 2); Numbering, addressing and identification".
- [3] GSM 04.03 (ETS 300 552): "European digital cellular telecommunication system (Phase 2); Mobile Station - Base Station System (MS - BSS) interface Channel structures and access capabilities".
- [4] GSM 04.06 (ETS 300 555): "European digital cellular telecommunication system (Phase 2); Mobile Station - Base Station System (MS - BSS) interface Data Link (DL) layer specification".
- [5] GSM 04.08 (ETS 300 557): "European digital cellular telecommunication system (Phase 2); Mobile radio interface layer 3 specification".
- [6] GSM 05.03 (ETS 300 575): "European digital cellular telecommunication system (Phase 2); Channel coding".
- [7] GSM 05.04 (ETS 300 576): "European digital cellular telecommunication system (Phase 2); Modulation".
- [8] GSM 05.05 (ETS 300 577): "European digital cellular telecommunication system (Phase 2); Radio transmission and reception".
- [9] GSM 05.08 (ETS 300 578): "European digital cellular telecommunication system (Phase 2); Radio subsystem link control".
- [10] GSM 05.10 (ETS 300 579): "European digital cellular telecommunication system (Phase 2); Radio subsystem synchronisation".

### 1.3 Definitions and abbreviations

Definitions and abbreviations used in this specification are listed in GSM 01.04.

## 2 General

The radio subsystem is required to support a certain number of logical channels that can be separated into two overall categories as defined in GSM 04.03:

- i) The traffic channels (TCH's).
- ii) The control channels.

More information is given about these logical channels in section 3 which also defines a number of special channels used by the radio sub-system.

Section 4 of this document describes the physical resource available to the radio sub-system, section 5 defines physical channels based on that resource and section 6 specifies how the logical channels shall be mapped onto physical channels. Figure 1 depicts this process.

### 3 Logical channels

#### 3.1 General

This section describes the logical channels that are supported by the radio subsystem.

#### 3.2 Traffic channels

##### 3.2.1 General

Traffic channels (TCH's) are intended to carry either encoded speech or user data. Two general forms of traffic channel are defined:

- i) Full rate traffic channel (TCH/F). This channel carries information at a gross rate of 22.8 kbits/s.
- ii) Half rate traffic channel (TCH/H). This channel carries information at a gross rate of 11.4 kbit/s.

The specific traffic channels available in the categories of speech and user data are defined in the sections following.

##### 3.2.2 Speech traffic channels

iTeh STANDARD PREVIEW  
(standards.iteh.ai)

The following traffic channels are defined to carry encoded speech:

- i) Full rate traffic channel for speech (TCH/FS)
- ii) Half rate traffic channel for speech (TCH/HS)

##### 3.2.3 Data traffic channels

The following traffic channels are defined to carry user data:

- i) Full rate traffic channel for 9.6 kbit/s user data (TCH/F9.6).
- ii) Full rate traffic channel for 4.8 kbit/s user data (TCH/F4.8).
- iii) Half rate traffic channel for 4.8 kbit/s user data (TCH/H4.8).
- iv) Half rate traffic channel for  $\leq 2.4$  kbit/s user data (TCH/H2.4).
- v) Full rate traffic channel for  $\leq 2.4$  kbit/s user data (TCH/F2.4)

#### 3.3 Control channels

##### 3.3.1 General

Control channels are intended to carry signalling or synchronization data. Three categories of control channel are defined: broadcast, common and dedicated. Specific channels within these categories are defined in the sections following.

**3.3.2 Broadcast channels****3.3.2.1 Frequency correction channel (FCCH)**

The frequency correction channel carries information for frequency correction of the mobile station. It is required only for the operation of the radio sub-system.

**3.3.2.2 Synchronization channel (SCH)**

The synchronization channel carries information for frame synchronization of the mobile station and identification of a base transceiver station. It is required only for the operation of the radio sub-system. Specifically the synchronization channel shall contain two encoded parameters:

- a) Base transceiver station identity code (BSIC): 6 bits (before channel coding) consists of 3 bits of PLMN colour code with range 0 to 7 and 3 bits of BS colour code with range 0 to 7 as defined in GSM 03.03.
- b) Reduced TDMA frame number (RFN): 19 bits (before channel coding) =

T1	(11 bits)	range 0 to 2047	= FN div ( 26 x 51)
T2	(5 bits)	range 0 to 25	= FN mod 26
T3'	(3 bits)	range 0 to 4	= (T3 - 1) div 10

where

T3	(6 bits)	range 0 to 50	= FN mod 51
----	----------	---------------	-------------

and

FN = TDMA frame number as defined in section 4.3.3.

GSM 04.06 and GSM 04.08 specify the precise bit ordering, GSM 05.03 the channel coding of the above parameters and GSM 05.10 defines how the TDMA frame number can be calculated from T1, T2, and T3'.

<https://standards.iteh.ai/catalog/standards/sist/7945051-2701-433c-9089-aa5440ecad4b/sist-ets-300-574-e2-2003>

**3.3.2.3 Broadcast control channel (BCCH)**

The broadcast control channel broadcasts general information on a base transceiver station per base transceiver station basis. Of the many parameters contained in the BCCH, the use of the following parameters, as defined in GSM 04.08 are referred to in section 6.5:

- a) CCCH\_CONF which indicates the organization of the common control channels:

From this parameter, the number of common control channels (BS\_CC\_CHANS) and whether or not CCCH or SDCCH are combined (BS\_CCCH\_SDCCH\_COMB = true or false) are derived as follows:

CCCH_CONF	BS_CC_CHANS	BS_CCCH_SDCCH_COMB
000	1	false
001	1	true
010	2	false
100	3	false
110	4	false

- b) BS\_AG\_BLK\_RES which indicates the number of blocks on each common control channel reserved for access grant messages:  
3 bits (before channel coding) range 0 to 7.

- c) BS\_PA\_MFRMS which indicates the number of 51 TDMA frame multiframes between transmission of paging messages to mobiles of the same paging group:  
3 bits (before channel coding) range 2 to 9.

### 3.3.3 Common control type channels, known when combined as a common control channel (CCCH):

- i) Paging channel (PCH): Downlink only, used to page mobiles.
- ii) Random access channel (RACH): Uplink only, used to request allocation of a SDCCH.
- iii) Access grant channel (AGCH): Downlink only, used to allocate a SDCCH or directly a TCH.

### 3.3.4 Dedicated control channels

- i) Slow, TCH/F associated, control channel (SACCH/TF)
- ii) Fast, TCH/F associated, control channel (FACCH/F)
- iii) Slow, TCH/H associated, control channel (SACCH/TH)
- iv) Fast, TCH/H associated, control channel (FACCH/H)
- v) Stand alone dedicated control channel (SDCCH/8)
- vi) Slow, SDCCH/8 associated, control channel (SACCH/C8)
- vii) Stand alone dedicated control channel, combined with CCCH (SDCCH/4)
- viii) Slow, SDCCH/4 associated, control channel (SACCH/C4)

### 3.3.5 Cell Broadcast Channel (CBCH)

The CBCH, downlink only, is used to carry the short message service cell broadcast (SMS-SCB). The CBCH uses the same physical channel as the SDCCH.

## 3.4 Combination of channels

Only certain combinations of channels are allowed as defined in GSM 04.03. Section 6.4 lists the combinations in relation to basic physical channels.

## 4 The physical resource

[SIST ETS 300 574 E2:2003](https://standards.iteh.ai/catalog/standards/sist/7945051-2701-433c-9089-aa5440ecad4b/sist-ets-300-574-e2-2003)

<https://standards.iteh.ai/catalog/standards/sist/7945051-2701-433c-9089-aa5440ecad4b/sist-ets-300-574-e2-2003>

### 4.1 General

The physical resource available to the radio sub-system is an allocation of part of the radio spectrum. This resource is partitioned both in frequency and time. Frequency is partitioned by radio frequency channels (RFCHs) divided into bands as defined in GSM 05.05. Time is partitioned by timeslots and TDMA frames as defined in section 4.3 of this document.

### 4.2 Radio frequency channels

#### 4.2.1 Cell allocation and mobile allocation

GSM 05.05 defines radio frequency channels (RFCHs), and allocates numbers to all the radio frequency channels available to the system. Each cell is allocated a subset of these channels, defined as the cell allocation (CA). One radio frequency channel of the cell allocation shall be used to carry synchronization information and the BCCH, this shall be known as BCCH carrier. The subset of the cell allocation, allocated to a particular mobile, shall be known as the mobile allocation (MA).

#### 4.2.2 Downlink and uplink

The downlink comprises radio frequency channels used in the base transceiver station to mobile station direction.