SLOVENSKI STANDARD

SIST ISO 11464:2006

december 2006

Kakovost tal – Priprava vzorcev za fizikalno-kemijske analize

Soil quality - Pretreatment of samples for physico-chemical analyses

iTeh STANDARD PREVIEW (standards.iteh.ai)

<u>SIST ISO 11464:2006</u> https://standards.iteh.ai/catalog/standards/sist/89b49820-f506-4c62-98c2-16bb7c13008b/sist-iso-11464-2006

ICS 13.080.05

Referenčna številka SIST ISO 11464:2006(en)

iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST ISO 11464:2006

https://standards.iteh.ai/catalog/standards/sist/89b49820-f506-4c62-98c2-16bb7c13008b/sist-iso-11464-2006

INTERNATIONAL STANDARD

ISO 11464

Second edition 2006-07-01

Soil quality — Pretreatment of samples for physico-chemical analysis

Qualité du sol — Prétraitement des échantillons pour analyses physicochimiques

iTeh STANDARD PREVIEW (standards.iteh.ai)

<u>SIST ISO 11464:2006</u> https://standards.iteh.ai/catalog/standards/sist/89b49820-f506-4c62-98c2-16bb7c13008b/sist-iso-11464-2006



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW (standards.iteh.ai)

<u>SIST ISO 11464:2006</u> https://standards.iteh.ai/catalog/standards/sist/89b49820-f506-4c62-98c2-16bb7c13008b/sist-iso-11464-2006

© ISO 2006

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents	Page
1 Scope	
2 Normative references	
3 Principle	
4 Apparatus	
5 Procedure	
5.1 General	
5.2 Sample description	4
5.3 Drying	4
5.3.1 General	4
5.3.2 Air drying	4
	4
5.3.4 Freeze-drying	4
5.4 Crushing and removal of coarse materials	5
5.4.1 Separation of stones, etc	RD PREVIEW 5
5.4.2 Crushing	
5.5 Subsampling	ds.iteh.ai) 5
5.5.1 General	5
5.5.2 Subsampling by hand (quartering)	<u>11464:2006</u> ards/sist/89b49820-t506-4c62-98c2-
5.5.3 Use of the sample divider https://standards.iten.ai/catalog/stand	ards/sist/89649820-1506-4c62-98c2- ist-isu-11464-2006
5.5.4 Mechanical subsampling	
5.6 Milling	6
6 Test report	6
Annex A (informative) Examples of apparatus	8
Bibliography	11

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 11464 was prepared by Technical Committee ISO/TC 190, Soil quality, Subcommittee SC 3, Chemical methods and soil characteristics.

This second edition cancels and replaces the first edition (ISO 11464:1994), which has been technically revised.

(standards.iteh.ai)

<u>SIST ISO 11464:2006</u> https://standards.iteh.ai/catalog/standards/sist/89b49820-f506-4c62-98c2-16bb7c13008b/sist-iso-11464-2006

Soil quality — Pretreatment of samples for physico-chemical analysis

1 Scope

This International Standard specifies the pretreatments required for soil samples that are to be subjected to physico-chemical analyses of stable and non-volatile parameters and describes the following five types of pretreatment of samples: drying, crushing, sieving, dividing and milling.

The pretreatment procedures described in this International Standard are not applicable if they affect the results of the determinations to be made. This International Standard is also not applicable to samples when volatile compounds are measured. In general, International Standards for analytical methods will state when it is necessary to adopt other procedures.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies tandards item.

ISO 565, Test sieves — Metal wire cloth, perforated metal plate and electroformed sheet — Nominal sizes of openings

https://standards.iteh.ai/catalog/standards/sist/89b49820-f506-4c62-98c2-

ISO 10381-8, Soil quality — Sampling — Part 8. Guidance on sampling of stockpiles

ISO 16720, Soil quality — Pretreatment of samples by freeze-drying for subsequent analysis

3 Principle

Soil samples are dried in air, or in an oven at temperature not exceeding 40 $^{\circ}$ C, or freeze-dried (see 5.3). If necessary, the soil sample is crushed while still damp and friable, and again after drying (see 5.4). The soil is sieved and the fraction smaller than 2 mm is divided into portions mechanically, or by hand, to enable representative subsampling for analysis (see 5.5). If small subsamples (< 2 g) are required for analysis, the size of the particles of the fraction smaller than 2 mm is further decreased (see 5.6). The necessary procedures are given in the flow diagram in Figure 1.

A drying temperature of 40 $^{\circ}$ C in an oven is preferable to air drying at room temperature because the increased speed of the drying limits changes due to microbial activity.

It should be noted that every type of pretreatment will have an influence on several soil properties.

The sieve aperture size of 2 mm is generally used. However, before the pretreatment is started, it should be checked if any of the analytical methods to be applied later require other sieve sizes.

NOTE Storing soil samples, including samples that are as received, air dried, refrigerated or stored in the absence of light, for a long time may have an influence on a number of soil parameters, especially solubilities of both inorganic and organic fractions. See Reference [1].

Special measures should usually be taken for samples from contaminated soils. It is important to avoid contact with the skin and special provisions should be taken when drying such samples (air discharge, ventilation, etc.).

© ISO 2006 – All rights reserved

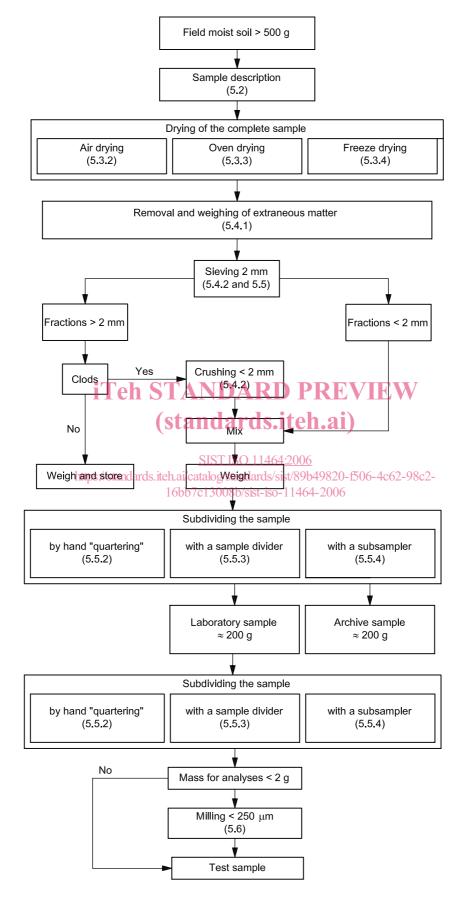


Figure 1 — Diagram for sample pretreatment

Samples may be hazardous because of the presence of chemical contaminants, fungal spores, or pathogens such as leptospirosis, and appropriate safety precautions should be taken.

In this International Standard, it is generally assumed that at least 500 g of fresh soil is available.

Keeping an archive sample (see Figure 1) is optional and should be clearly stated in the overall description of the investigation programme.

4 Apparatus

It is essential that the apparatus used does not add or remove any of the substances under investigation (e.g. heavy metals). If the use of certain equipment and/or materials is not permitted in pretreatment of samples required for a particular physico-chemical analysis, this shall be mentioned in the relevant International Standards on analysis (see Note).

- **4.1 Drying oven**, thermostatically controlled, with forced ventilation and capable of maintaining a temperature not exceeding 40 $^{\circ}$ C.
- **4.2** Freeze-drier, optional.
- **4.3** Crusher(s), mill(s), mortar and pestle, wooden or other soft-faced hammer (see Note).
- **4.4** Plate sieve, complying with ISO 565, with an aperture of 2 mm.
- 4.5 Mechanical mixer(s) eh STANDARD PREVIEW
- 4.6 Mechanical sieve shaker, optional (see Note) siteh ai)
- 4.7 Subsampler or sample divider (see Note). SIST ISO 11464:2006
- **4.8 Mesh sieve**, complying with ISO 565, with apertures of 250 µm or of the size specified in the relevant test method.
- **4.9** Analytical balance, readable and accurate to 0,1 g.
- **4.10** Balance, readable and accurate to 1 g.

NOTE The apparatus to be used is not specified in detail, although drawings of some suitable items of equipment are provided in Figures A.1 to A.4. Most comparable national standards contain detailed equipment specifications and these may be used, provided they meet the basic performance requirements indicated in this International Standard.

5 Procedure

5.1 General

The procedures for drying, fraction separation and size reduction are set out in 5.3 and 5.4. At several stages in the procedure, the analyst will be required to make decisions, referring in particular to whether size fractions are to be combined or treated separately: this will depend on the nature of the soil and the objectives of the analytical programme.

The sample shall be rehomogenized after any separation, sieving, crushing or milling operation (that may have resulted in segregation of different sized particles) has been carried out.

WARNING — Take special precautions with samples from potentially hazardous soil. Avoid any contact with the skin and make special provisions concerning drying (air discharge, ventilation, etc.).

Care should be taken to avoid contamination of the sample via the air or by dust (e.g. from the ambient laboratory atmosphere or between samples stored or processed close to one another).

© ISO 2006 – All rights reserved