



SLOVENSKI STANDARD
SIST-TS ETSI/TS 102 657 V1.9.1:2012
01-marec-2012

Zakonito prestrežanje (LI) - Ravnanje z zadržanimi podatki - Izročilni vmesnik za zahtevo in izročanje zadržanih podatkov

Lawful Interception (LI) - Retained data handling - Handover interface for the request and delivery of retained data

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Ta slovenski standard je istoveten z: **TS 102 657 Version 1.9.1**

SIST-TS ETSI/TS 102 657 V1.9.1:2012
<https://standards.iteh.ai/catalog/standards/sist/ba17bc67-8144-4d87-a859-9b363a379c8a/sist-ts-etsi-ts-102-657-v1-9-1-2012>

ICS:

33.040.40	Podatkovna komunikacijska omrežja	Data communication networks
35.200	Vmesniška in povezovalna oprema	Interface and interconnection equipment

SIST-TS ETSI/TS 102 657 V1.9.1:2012 en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST-TS ETSI/TS 102 657 V1.9.1:2012](https://standards.iteh.ai/catalog/standards/sist/baf7be67-8144-4d87-a859-9b363a379c8a/sist-ts-etsi-ts-102-657-v1-9-1-2012)

<https://standards.iteh.ai/catalog/standards/sist/baf7be67-8144-4d87-a859-9b363a379c8a/sist-ts-etsi-ts-102-657-v1-9-1-2012>

ETSI TS 102 657 V1.9.1 (2011-12)



Technical Specification

**Lawful Interception (LI);
Retained data handling;
Handover interface for the request and
delivery of retained data**

<https://standards.iteh.ai/catalog/standards/sist/baf7be67-8144-4d87-a859-9b363a379c8a/sist-ts-etsi-ts-102-657-v1-9-1-2012>



Reference

RTS/LI-00087

Keywords

handover, retention

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST-TS ETSI/TS 102 657 V1.9.1:2012

<https://standards.iteh.ai/catalog/standards/sist/baf7be67-8144-4d87-a859-9b363a379c88/etsi-ts-102-657-v1-9-1-2012>

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

http://portal.etsi.org/chaicor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2011.
All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.
3GPP™ and **LTE™** are Trade Marks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.
GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Contents

Intellectual Property Rights	8
Foreword.....	8
1 Scope	9
2 References	9
2.1 Normative references	9
2.2 Informative references.....	10
3 Definitions and abbreviations.....	11
3.1 Definitions.....	11
3.2 Abbreviations	11
4 Overview of handover interface	13
4.1 Reference model.....	13
4.2 Structure of document and applicable communication domains	14
4.3 Categories of retained data	15
4.4 Handover Interface port 1 (HI-A) and Handover Interface port 2 (HI-B).....	15
4.5 Model used for the RDHI.....	16
5 Handover interface message flows.....	16
5.1 Introduction	16
5.1.1 Summary of this clause.....	16
5.1.2 Message flow modes.....	16
5.1.3 Delivery cases.....	17
5.1.4 "Active" requests and "closed" requests	17
5.1.5 Errors and failure situations.....	17
5.1.5.1 Error and failure types.....	17
5.1.5.2 Request process failure feedback.....	18
5.1.5.3 Other errors.....	18
5.1.5.4 Missing messages.....	18
5.1.6 Cancelling a request.....	19
5.1.7 Delivery of results.....	19
5.1.8 State diagram	20
5.2 Message flows for general situation	21
5.2.1 Delivery of a response	21
5.2.2 Cancellation of request	22
5.2.3 Multi-part delivery.....	23
5.3 Message flows for Authorized-Organization-initiated scenario.....	24
5.3.1 Delivery of results or a failure response	24
5.3.2 Cancellation of request	25
5.3.3 Multi-part delivery.....	25
5.4 Message types for HI-A and HI-B.....	26
5.5 HI-A and HI-B addressing.....	27
6 Definition of the elements for retained data messages	27
6.1 Header information.....	27
6.1.1 Use of header information	27
6.1.2 RequestID field specification.....	27
6.1.3 CSP Identifiers.....	28
6.1.3.1 Use of CSP identifiers (CSPID).....	28
6.1.3.2 Third Party CSP Identifier (thirdPartyCSPID).....	28
6.1.4 Timestamp (timeStamp)	28
6.2 Retained Data response	28
6.2.1 General.....	28
6.2.2 Additional information in response messages.....	28
6.2.2.1 Record number (recordNumber)	28
6.2.2.2 Response status (ResponseStatus).....	29
6.2.3 Volatile information.....	29

6.2.4	Unavailable parameters.....	29
6.3	Retained Data requests	29
6.3.1	Information contained within a request	29
6.3.2	Format of a request	30
6.3.3	Additional information in requests	30
6.3.3.1	Priority of a request	30
6.3.3.2	Maximum hits	30
6.4	Error messages	31
7	Data exchange techniques	31
7.1	General	31
7.2	HTTP data exchange	31
7.2.1	Basic configuration	31
7.2.2	Single client/server	31
7.2.3	Mutual client/server	31
7.2.4	Details common to both single and mutual cases	31
7.3	Direct TCP data exchange	32
7.3.1	Application layer	32
7.3.2	Transport layer.....	33
7.3.2.1	Introduction.....	33
7.3.2.2	TCP settings	33
7.3.3	Network layer	33
7.3.4	Delivery networks.....	33
8	Security Measures	33
8.1	General	33
8.2	Connection Level Security	33
8.3	Application Level Security	34
8.4	Technical Security Measures.....	34
8.4.1	General.....	34
8.4.2	Connection Level.....	34
8.4.3	Application Level	35
8.4.3.1	Hashes.....	35
8.4.3.2	Digital Signatures.....	35
8.4.3.3	HI-B Non-Repudiation.....	35
8.4.3.4	Digital Signatures and Message Structure.....	35
Annex A (normative):	Data fields.....	36
A.1	Summary	36
A.1.1	Introduction to data fields.....	36
A.1.2	Choice of data modelling language	36
A.1.3	Overview	36
A.2	Parameter definition for common fields.....	37
A.2.1	RetainedDataHeader.....	37
A.2.1.1	Parameters.....	37
A.2.1.2	RequestID parameters.....	37
A.2.2	RetainedDataPayload	37
A.2.2.1	RequestMessage parameters	37
A.2.2.2	RequestAcknowledgement parameters	37
A.2.2.3	ResponseMessage parameters.....	38
A.2.2.4	GetStatusMessage parameters	38
A.2.2.5	StatusMessage parameters	38
A.2.2.6	ErrorMessage parameters	39
A.2.3	GenericSubscriberInfo.....	39
A.2.3.1	Parameters.....	39
A.2.3.2	OrganizationInfo parameters	39
A.2.3.3	IndividualInfo parameters.....	39
A.3	ASN.1 definitions.....	40
A.3.1	General	40
A.3.1.1	ASN.1 syntax tree.....	40
A.3.1.2	General remarks on ASN.1	40

A.3.2	ASN.1 Definitions for message headers.....	41
A.3.2.1	Message wrappers.....	41
A.3.2.2	Message headers.....	41
A.3.3	ASN.1 definitions for common fields.....	45
A.3.4	Schematic representation of top level ASN.1.....	48
Annex B (normative): Service-specific details for telephony services.....		50
B.1	Scope.....	50
B.2	Telephony fields.....	50
B.2.1	General.....	50
B.2.2	Telephony Subscriber.....	50
B.2.2.1	subscriber ID.....	50
B.2.2.2	genericSubscriberInfo.....	50
B.2.2.3	telephonySubscriberInfo.....	51
B.2.2.4	subscribedTelephonyServices.....	51
B.2.2.4.1	Description.....	51
B.2.3	Telephony Billing Details.....	51
B.2.3.1	BillingRecords.....	52
B.2.4	Telephony ServiceUsage.....	52
B.2.4.1	Parameters.....	52
B.2.4.2	PartyInformation.....	53
B.2.4.3	SMSInformation.....	53
B.2.4.4	MmsInformation.....	54
B.2.5	TelephonyDevice.....	54
B.2.5.1	General.....	54
B.2.6	TelephonyNetworkElement.....	54
B.2.6.1	General.....	54
B.2.6.2	Location parameters.....	55
B.2.6.2.1	General.....	55
B.2.6.2.2	GSM Location Information.....	55
B.2.6.2.3	UMTS Location Information.....	55
B.2.6.2.4	Extended Location.....	56
B.3	ASN.1 definitions for telephony.....	56
B.4	Schematic view of ASN.1 definitions.....	69
Annex C (normative): Service-specific details for asynchronous message services.....		71
C.1	Scope.....	71
C.2	Descriptions.....	71
C.2.1	General.....	71
C.2.2	MsgSubscriber.....	72
C.2.3	MsgSubscriberID.....	72
C.2.4	MsgStore.....	72
C.2.5	MsgStoreID.....	72
C.2.6	MsgAddress.....	72
C.2.7	MsgProviderID.....	72
C.2.8	MsgServiceUsage.....	73
C.2.9	MsgTransmission.....	73
C.2.10	MsgStoreOperation.....	73
C.3	ASN.1 definitions for asynchronous message services.....	74
C.4	Schematic view of ASN.1 definitions.....	77
Annex D (normative): Service-specific details for synchronous multi-media services.....		78
D.1	Scope.....	78
D.2	Multimedia fields.....	78
D.2.1	General.....	78
D.2.2	Multimedia Subscriber.....	78

D.2.2.1	subscriberID.....	78
D.2.2.2	genericSubscriberInfo.....	79
D.2.2.3	multimediaSubscriberInfo.....	79
D.2.2.4	subscribedMultimediaServices.....	79
D.2.2.4.1	Description.....	79
D.2.3	MultimediaBillingDetails.....	80
D.2.3.1	MultimediaBillingDetails.....	80
D.2.3.2	MultimediaBillingRecords.....	80
D.2.4	Multimedia ServiceUsage.....	81
D.2.4.1	Parameters.....	81
D.2.4.2	PartyInformation.....	81
D.2.4.3	IMSInformation.....	82
D.2.4.4	MediaComponents.....	82
D.3	ASN.1 definitions for Multimedia.....	83
D.4	Schematic view of ASN.1 definitions.....	88
Annex E (normative): Service-specific details for network access services.....		89
E.1	Scope.....	89
E.2	Descriptions.....	89
E.2.1	General.....	89
E.2.2	NASubscriber.....	89
E.2.3	NAServiceSubscription.....	90
E.2.4	NAServiceUsage.....	90
E.2.5	NADevice.....	91
E.2.6	NANwElement.....	91
E.2.7	NABillingDetails.....	92
E.3	ASN.1 definitions for network access services.....	93
E.4	Schematic view of ASN.1 definitions.....	98
Annex F (informative): Basic set of search routines for Retained Data.....		99
F.1	Example set of search routines.....	99
F.1.1	Introduction.....	99
F.1.2	Summary of search case.....	99
F.1.3	Subscriber records.....	99
F.2	Telephony data.....	100
F.2.1	Telephony subscriber.....	100
F.2.2	Telephony billing details.....	100
F.2.3	Telephony service usage.....	100
F.2.4	Telephony network element.....	100
F.3	Messaging data.....	101
F.3.1	Message subscriber.....	101
F.3.2	Message service usage.....	101
F.4	Network Access data.....	101
F.4.1	NA subscriber.....	101
F.4.2	NA service usage.....	102
Annex G (informative): Examples of search routines.....		103
G.1	Introduction.....	103
G.2	Example for telephony subscriber query in clause F.2.1.....	103
G.3	Example for telephony service usage query in clause F.2.3.....	104
Annex H (informative): Further information on data categories.....		105
H.1	General.....	105

H.2	Further information on subscriber data	105
H.2.1	Subscriber data requests	105
H.2.2	Generic subscriber data records.....	106
H.2.3	Service Specific Subscriber Reply Data	106
H.3	Further information on usage data.....	107
H.3.1	Usage requests.....	107
H.3.2	Usage data categories	107
H.3.3	Usage: Traffic Data (Reply)	107
H.3.4	Usage: Traffic Data related information (Reply).....	107
H.3.5	Usage: communication independent user activities (Reply).....	108
H.3.6	Usage: network Activity Data (Reply)	108
H.4	Further information on network element data	108
H.4.1	Network element requests	108
H.4.2	Network Configuration Data Reply Data	108
Annex I (informative):	Manual techniques.....	109
Annex J (informative):	Informative mapping of data fields to the EU Data Retention Directive.....	110
Annex K (informative):	Single versus multi-part deliveries	111
K.1	General	111
K.2	Criteria for multi-part delivery	111
K.3	Subscriptions into the future.....	112
Annex L (informative):	Change Request History.....	113
History		115

[SIST-TS ETSI/TS 102 657 V1.9.1:2012](https://standards.iteh.ai/catalog/standards/sist/baf7be67-8144-4d87-a859-9b363a379c8a/sist-ts-etsi-ts-102-657-v1-9-1-2012)
<https://standards.iteh.ai/catalog/standards/sist/baf7be67-8144-4d87-a859-9b363a379c8a/sist-ts-etsi-ts-102-657-v1-9-1-2012>

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://ipr.etsi.org>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI Technical Committee Lawful Interception (LI).

The ASN.1 module and XML schema are also available as an electronic attachment to the original document from the ETSI site (see details in clause A.3.1.2).

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST-TS ETSI/TS 102 657 V1.9.1:2012](https://standards.iteh.ai/catalog/standards/sist/baf7be67-8144-4d87-a859-9b363a379c8a/sist-ts-etsi-ts-102-657-v1-9-1-2012)

<https://standards.iteh.ai/catalog/standards/sist/baf7be67-8144-4d87-a859-9b363a379c8a/sist-ts-etsi-ts-102-657-v1-9-1-2012>

1 Scope

The present document contains handover requirements and a handover specification for the data that is identified in EU Directive 2006/24/EC on Data Retention [1]. The handover requirements from TS 102 656 [2] are derived from the requirements contained in and implied by the EU Directive [1] and by other national legislations. The present document considers both the requesting of retained data and the delivery of the results.

The present document defines an electronic interface. An informative annex describes how this interface may be adapted for manual techniques. Apart from in annex I, the present document does not consider manual techniques.

2 References

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the reference document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication ETSI cannot guarantee their long term validity.

2.1 Normative references

The following referenced documents are necessary for the application of the present document.

- [1] Directive 2006/24/EC of the European Parliament and of the Council of 15 March 2006 on the retention of data generated or processed in connection with the provision of publicly available electronic communications services or of public communications networks and amending Directive 2002/58/EC
 - [2] ETSI TS 102 656: "Lawful Interception (LI); Retained Data; Requirements of Law Enforcement Agencies for handling Retained Data".
 - [3] ETSI TS 102 232-1: "Lawful Interception (LI); Handover Interface and Service-Specific Details (SSD) for IP delivery; Part 1: Handover specification for IP delivery".
 - [4] ISO 3166-1: "Codes for the representation of names of countries and their subdivisions - Part 1: Country codes".
 - [5] ISO 4217: "Codes for the representation of currencies and funds".
 - [6] ETSI TS 101 671: "Lawful Interception (LI); Handover interface for the lawful interception of telecommunications traffic".
- NOTE: Periodically TS 101 671 is published as ES 201 671. A reference to the latest version of the TS as above reflects the latest stable content from ETSI/TC LI.
- [7] ETSI EN 300 356 (all parts): "Integrated Services Digital Network (ISDN); Signalling System No.7 (SS7); ISDN User Part (ISUP) version 4 for the international interface".
 - [8] ETSI TS 100 974: "Digital cellular telecommunications system (Phase 2+); Mobile Application Part (MAP) Specification (3GPP TS 09.02)".
 - [9] ETSI TS 124 008: "Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); LTE; Mobile radio interface Layer 3 specification; Core network protocols; Stage 3 (3GPP TS 24.008)".
 - [10] Void.

- [11] ETSI TS 133 108: "Universal Mobile Telecommunications System (UMTS); LTE; 3G security; Handover interface for Lawful Interception (LI) (3GPP TS 33.108)".
- [12] ETSI TS 101 109: "Digital cellular telecommunications system (Phase 2+); Universal Geographical Area Description (GAD) (3GPP TS 03.32 version 7.2.0 Release 1998)".
- [13] FIPS PUB 186-2: "Digital Signature Standard (DSS)".
- [14] IETF RFC 2616: "Hypertext Transfer Protocol - HTTP/1.1".
- [15] IETF RFC 2818: "HTTP Over TLS".
- [16] ETSI TS 123 040: "Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); Technical realization of the Short Message Service (SMS) (3GPP TS 23.040)".
- [17] IETF RFC 0793: "Transmission Control Protocol".
- [18] IETF RFC 5681: "TCP Congestion Control".
- NOTE: IETF RFC 5681 obsoletes IETF RFC 2581: "TCP Congestion Control".
- [19] IETF RFC 6298: "Computing TCP's Retransmission Timer".
- NOTE: IETF RFC 6298 obsoletes IETF RFC 2988: "Computing TCP's Retransmission Timer".
- [20] IETF RFC 1122: "Requirements for Internet Hosts - Communication Layers".
- [21] IETF RFC 0791: "Internet Protocol".
- [22] ETSI ES 282 002: "Telecommunications and Internet converged Services and Protocols for Advanced Networking (TISPAN); PSTN/ISDN Emulation Sub-system (PES); Functional architecture".
- [23] IETF RFC 0822: "Standard for the Format of ARPA internet text messages".
- [24] IETF RFC 5322: "Internet Message Format".
- NOTE: IETF RFC 5322 obsoletes IETF RFC 2822: "Internet Message Format".
- [25] ETSI TS 123 228: "Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); LTE; IP Multimedia Subsystem (IMS); Stage 2 (3GPP TS 23.228)".
- [26] IETF RFC 3261: "SIP: Session Initiation Protocol".
- [27] IETF RFC 4506: "XDR: External Data Representation Standard".
- [28] ISO 13616-1:2007: "Financial services - International bank account number (IBAN) - Part 1: Structure of the IBAN".
- [29] ISO 9362:2009: "Banking - Banking telecommunication messages - Business identifier code (BIC)".
- [30] ETSI TS 123 003: "Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); Numbering, addressing and identification (3GPP TS 23.003)".

2.2 Informative references

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

Not applicable.

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

authorized organization: any authority legally authorized to request or receive retained data e.g. a Law Enforcement Agency

Handover Interface A (HI-A): administrative handover interface comprising requests for information and their responses

Handover Interface B (HI-B): data handover interface comprising the retained data transmission of information

issuing authority: any entity possessing the necessary jurisdiction and authority pursuant to law to compel a service provider to deliver retained subscriber information or traffic data specified in a query

lawful authorization: permission granted to an Authorized Organization under certain conditions to request specified telecommunications retained data and requiring co-operation from a network operator/service provider/access provider

NOTE: Typically, this refers to a warrant or order issued by a lawfully authorized body.

location information: information relating to the geographic, physical or logical location of an identity relating to an interception subject

number: any address (E.164, IP, email, URI) used for routing in a network or in a service on a user level or network/service level

receiving authority: any entity possessing the necessary authority pursuant to law and the technical means to receive retained subscriber information or traffic data delivered by a service provider

request: legal requirement for a Communications Service Provider (CSP) to disclose retained data in accordance with relevant national law

response to request of information: response from the CSP to the authorized organization acknowledging or rejecting a request for information

retained data record: set of data elements for a specific subscriber/user related to a specific service transaction

service transaction: instance of a service given by a CSP to a subscriber/user

service transaction record: set of data elements describing a service transaction (details to be determined)

transmission of information: transmission of retained data from the CSP to the receiving authority

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ACK	Acknowledge
ADSL	Asymmetric Digital Subscriber Line
AO	Authorized Organization
APN	Access Point Name
ASCII	American Standard Code for Information Interchange
ASN	Abstract Syntax Notation
BER	Basic Encoding Rules
BIC	Business Identifier Code
CPE	Customer Premises Equipment
CS	Circuit Switched
CSP	Communications Service Provider
CSPID	CSP Identifier
DNS	Domain Name System

DR	Data Retention
DRD	Data Retention Directive
DSA	Digital Signature Algorithm
DSL	Digital Subscriber Line
DSS	Digital Signature Standard
DVD	Digital Versatile Disc or Digital Video Disc
EMS	Enhanced Messaging Service
GGSN	Gateway GPRS Support Node
GPRS	General Packet Radio Service
GSM	Global System for Mobile communications
HI	Handover Interface
HI-A	Handover Interface A
HI-B	Handover Interface B
HTTP	HyperText Transfer Protocol
HTTPS	HyperText Transfer Protocol over Secure Socket Layer
IBAN	International Banking Account Number
ICCID	Integrated Circuit Card ID
ID	IDentifier
IEI	Information Element Identifier
IMAP	Internet Message Access Protocol
IMEI	International Mobile Equipment Identity
IMS	IP Multimedia Subsystem
IMSI	International Mobile Subscriber Identity
IP	Internet Protocol
IPSec	Internet Protocol Security
IRI	Intercept Related Information
ISDN	Integrated Services Digital Network
ISUP	ISDN User Part
LAN	Local Area Network
LEA	Law Enforcement Agency
LI	Lawful Interception
MAC	Media Access Control
MF-B	Mediation Function B
MMS	Multimedia Messaging Service
MS	Mobile Station
MSC	Mobile Switching Centre
MSISDN	Mobile Subscriber ISDN number
MSN	Multiple Subscriber Number
NA	Network Access
NAS	Network Access Server
PDP	Packet Data Protocol
PDU	Protocol Data Unit
PS	Packet Switched
PSTN	Public Switched Telephone Network
PUK	Personal Unblocking Key
RAI	Routing Area Identifier
RD	Retained Data
RDHI	Retained Data Handover Interface
SAI	Service Area Identifier
SC	SMS Centre
SDP	Session Description Protocol
SGSN	Serving GPRS Support Node
SHA	Secure Hash Algorithm
SIM	Subscriber Identity Module
SIP	Session Initiation Protocol
SMS	Short Message Service
SMTP	Simple Mail Transfer Protocol
TCP	Transmission Control Protocol
TL	Latency Time
TLS	Transport Layer Security
TR	Time of the Request
TV	Television


UMTS	Universal Mobile Telecommunication System
URI	Uniform Resource Identifier
UTF	Unicode Transformation Format
UTM	Universal Transverse Mercator
WGS	World Geodetic System
XML	eXtensible Markup Language

4 Overview of handover interface

4.1 Reference model

The generic Handover Interface adopts a two-port structure such that administrative request/response information (HI-A) and Retained Data Information (HI-B) are logically separated.

Figure 1 is the reference model for the request and transmission of retained telecommunications data.

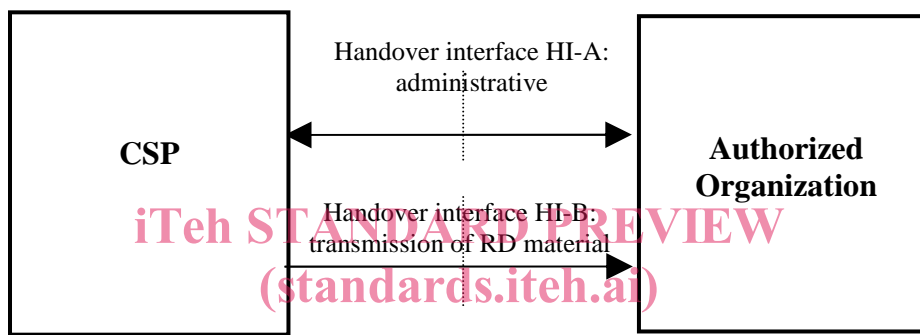

SIST-TS ETSI/TS 102 657 V1.9.1:2012

NOTE 1: The term Authorized Organization covers any agency legally authorized to make RDHI requests (see clause 3.1).

NOTE 2: HI-B delivers data from CSP to the Authorized Organization. There may be related supporting lower level messages from the Authorized Organization to CSP on HI-B.

Figure 1: Functional diagram showing handover interface HI

Each of these two parties can be expanded to show some of their internal functions. This is not to proscribe how implementations of the present document must be organized, and is purely informational.

Within the CSP block, three internal CSP functions can be identified: an *administrative function* to manage the RD requests and responses; a *data collection function* to collect data from the various internal network elements and prepare the data for retention; a *data store management function* to index and store the data, execute queries, and manage the maximum retention period for RD.

Within the Authorized Organization block, two functions can be identified: an *issuing authority* responsible for initiating new RDHI requests; a *receiving authority* to accept the RDHI responses. In many situations, the authority issuing a request will also be the authority to receive the responses. However, the issuing authority may indicate a different delivery point for HI-B responses, in which case the issuing authority and receiving authority will be different.

These internal functions, and the interfaces between them, do not form a normative part of the present document.