
**Road vehicles — Vehicle test methods for
electrical disturbances from narrowband
radiated electromagnetic energy —**

**Part 2:
Off-vehicle radiation sources**

iTeh STANDARD PREVIEW

(standards.iteh.ai)
*Véhicules routiers — Méthodes d'essai d'un véhicule soumis à des
perturbations électriques par rayonnement d'énergie électromagnétique
en bande étroite —*

Partie 2: Sources de rayonnement hors du véhicule

<https://standards.iteh.ai/catalog/standards/sist/3e01e746-edea-4a17-951c-294eb9fbd62a/iso-11451-2-2005>



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 11451-2:2005](https://standards.iteh.ai/catalog/standards/sist/3e01e746-edea-4a17-951c-294eb9fbd62a/iso-11451-2-2005)

<https://standards.iteh.ai/catalog/standards/sist/3e01e746-edea-4a17-951c-294eb9fbd62a/iso-11451-2-2005>

© ISO 2005

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 General test conditions	1
5 Test location	2
6 Test apparatus	3
7 Stimulation and monitoring of vehicle	5
8 Test set-up (see Figure 3)	5
9 Testing	6
Annex A (informative) Functional performance status classification (FPSC)	13

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 11451-2:2005](https://standards.iteh.ai/catalog/standards/sist/3e01e746-edea-4a17-951c-294eb9fbd62a/iso-11451-2-2005)

<https://standards.iteh.ai/catalog/standards/sist/3e01e746-edea-4a17-951c-294eb9fbd62a/iso-11451-2-2005>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 11451-2 was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 3, *Electrical and electronic equipment*.

This third edition cancels and replaces the second edition (ISO 11451-2:2001), which has been technically revised.

ISO 11451 consists of the following parts, under the general title *Road vehicles — Vehicle test methods for electrical disturbances from narrowband radiated electromagnetic energy*:

- *Part 1: General principles and terminology*
- *Part 2: Off-vehicle radiation sources*
- *Part 3: On-board transmitter simulation*
- *Part 4: Bulk current injection (BCI)*

Road vehicles — Vehicle test methods for electrical disturbances from narrowband radiated electromagnetic energy —

Part 2: Off-vehicle radiation sources

1 Scope

This part of ISO 11451 specifies a vehicle test method for determining the immunity of passenger cars and commercial vehicles to electrical disturbances from off-vehicle radiation sources, regardless of the vehicle propulsion system (e.g. spark-ignition engine, diesel engine, electric motor). It can also be readily applied to other types of vehicles.

The electromagnetic disturbances considered are limited to narrowband electromagnetic fields.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 11451-1:2001, *Road vehicles — Vehicle test methods for electrical disturbances from narrowband radiated electromagnetic energy — Part 1: General principles and terminology*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 11451-1 apply.

4 General test conditions

The applicable frequency range of this test method is 0,01 MHz to 18 000 MHz. Testing over the full frequency range could require different field-generating devices, but this does not imply that testing of overlapping frequency ranges is required.

The user shall specify the test severity level or levels over the frequency range. Suggested test severity levels are given in Annex A.

See ISO 11451-1 for descriptions of, and requirements for, the following standard test conditions, applicable to this part of ISO 11451:

- test temperature;
- supply voltage;
- modulation;


- dwell time;
- frequency step sizes;
- definition of test severity levels;
- test signal quality.

5 Test location

The test should be performed in an absorber-lined shielded enclosure, the aim being to create an indoor electromagnetic compatibility testing facility that simulates open field testing.


The size, shape and construction of the enclosure may vary considerably. Typically, the floor is not covered with absorbing material, but such covering is allowed¹⁾. The minimum size of the shielded enclosure is determined by the size of the test region needed, the size of the field generation device or devices, the needed clearances between these and the largest vehicle to be tested, and the characteristics of the absorbing material. To create the test region, the absorber, field generation system and enclosure shape are selected such that the amount of extraneous energy in the test region is reduced to below a minimum value that will give the desired measurement accuracy. The design objective is to reduce the reflected energy in the test region to -10 dB or less over the test frequency range [not applicable to transmission line system (TLS) field generation systems]. An example of a rectangular shielded enclosure is shown in Figure 1.

Alternatively, the test may be performed at an outdoor test site. The test facility shall comply with (national) legal requirements regarding the emission of electromagnetic fields.

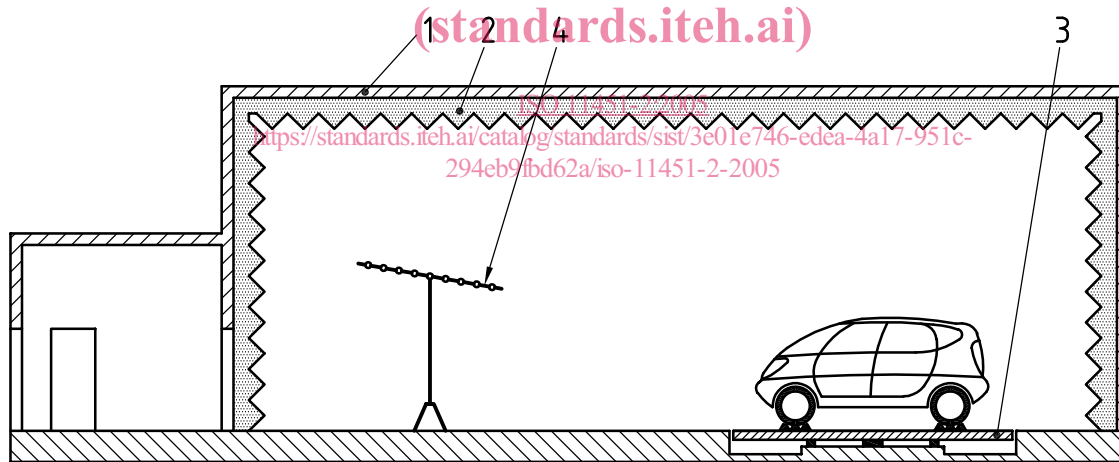

a) Vertical polarization

1) Measurements in enclosures with or without floor absorbers can lead to different results.

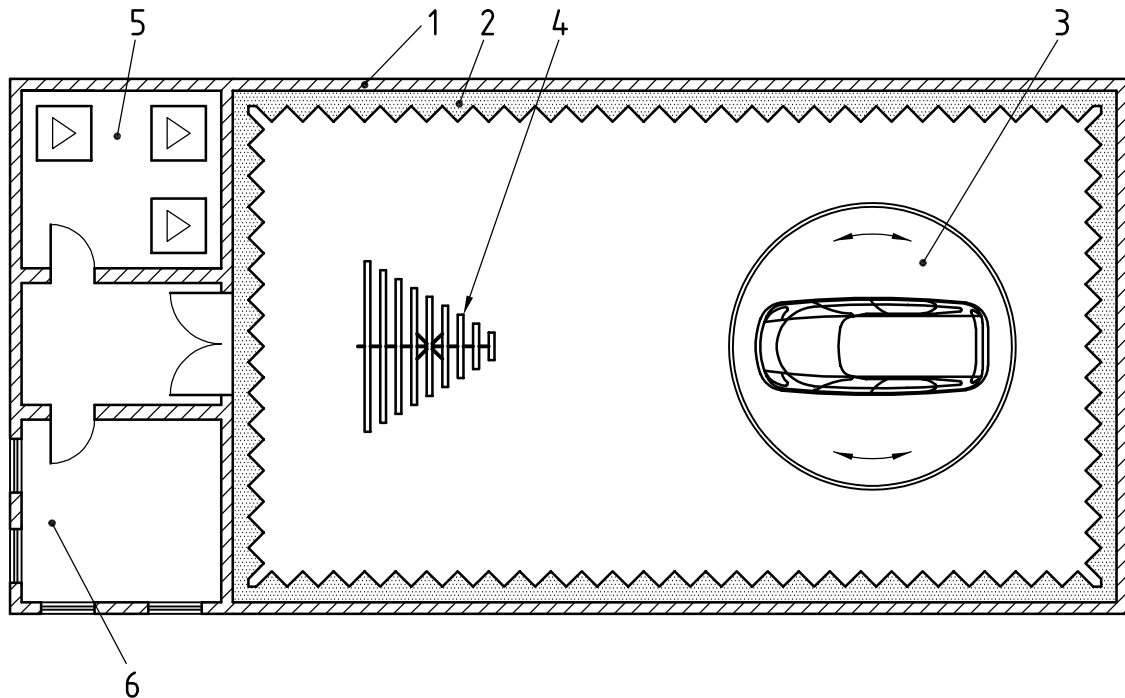

b) Horizontal polarization

iTeh STANDARD PREVIEW

Key

- 1 absorber-lined shielded enclosure (standards.iteh.ai)
- 2 RF absorber material
- 3 vehicle dynamometer on turntable^a [ISO 11451-2:2005](https://standards.iteh.ai/catalog/standards/sist/3e01e746-edea-4a17-951c-294eb9fbd62a/iso-11451-2-2005)
- 4 antenna <https://standards.iteh.ai/catalog/standards/sist/3e01e746-edea-4a17-951c-294eb9fbd62a/iso-11451-2-2005>
- 5 amplifier room
- 6 control room

^a Turntable shown rotatable through $\pm 180^\circ$ with two pairs of variable wheelbase rollers to accommodate all vehicle sizes and functions.

Figure 1 — Example of absorber-lined shielded enclosure

6 Test apparatus

Testing consists of generating radiated electromagnetic fields using antenna sets with radio frequency (RF) sources capable of producing the desired field strength over the range of test frequencies, for which the following apparatus/instrumentation shall be used.

6.1 Field generating device, which may be an antenna or antennas, or a TLS, and whose construction and orientation shall be such that the generated field can be polarized in the mode specified in the test plan (see 9.2).

See Figure 2 for an example of a parallel-plate TLS. Multiple antennas, amplifiers and directional couplers could be necessary to cover the complete frequency range.


6.2 field probe(s), which shall be electrically small in relation to the wavelength and isotropic.

The communication lines from the probes shall be fibre-optic links.

6.3 RF signal generator, with internal or external modulation capability.

6.4 High power amplifier(s).

6.5 Powermeter (or equivalent measuring instrument), for measuring forward and reflected power.

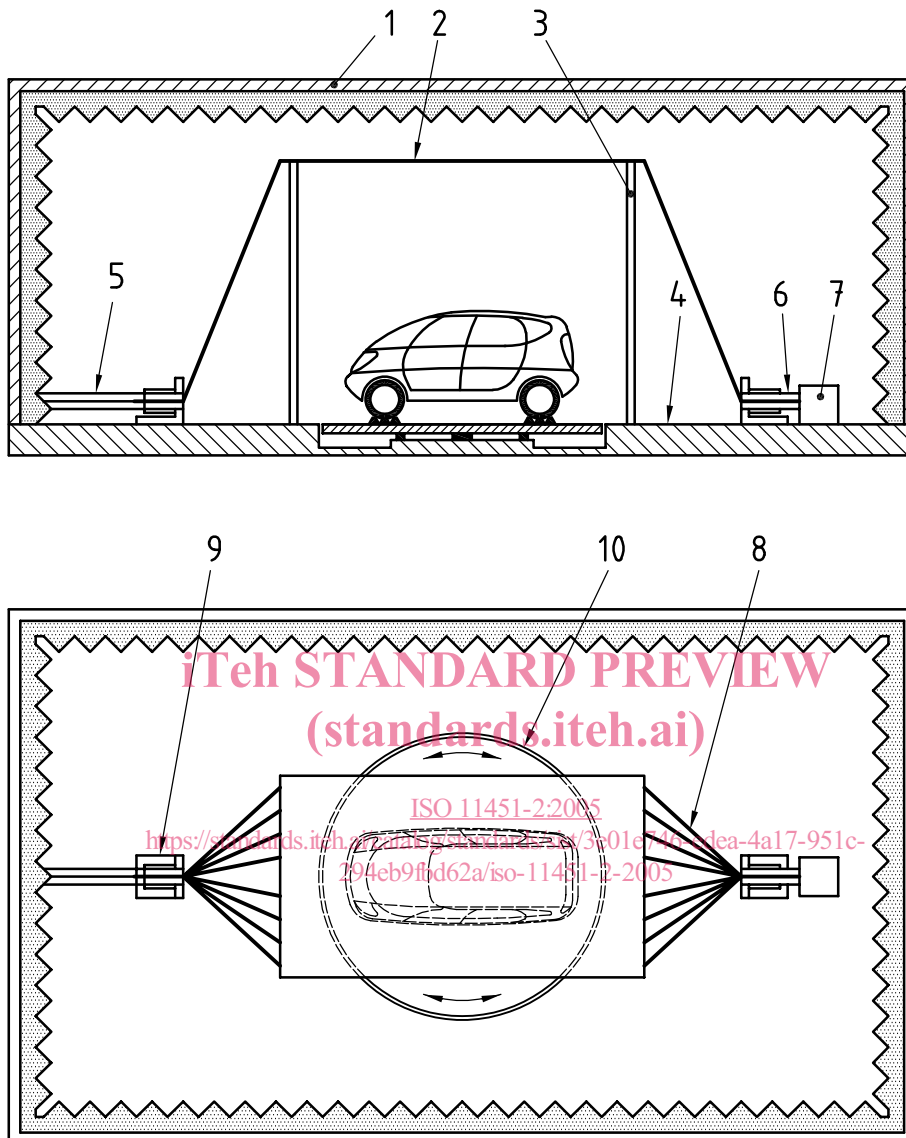

Key

- 1 shielded enclosure (absorbers permitted)
- 2 conductive plate or set of wires
- 3 non-metallic supports
- 4 shielded enclosure floor
- 5 signal source feed line (coaxial cable)
- 6 coaxial cable
- 7 load
- 8 conductive wires
- 9 signal source feed connection
- 10 turntable (not required for this test)

Figure 2 — Example of parallel-plate TLS

7 Stimulation and monitoring of vehicle

WARNING — Any electrical connection of monitoring equipment to the vehicle could cause malfunctions of the vehicle. Extreme care shall be taken to avoid such an effect.

The vehicle (the device under test or DUT) shall be operated as required in the test plan by using actuators which have a minimum effect on the electromagnetic characteristics, e.g. plastic blocks on the push-buttons, pneumatic actuators with plastic tubes.

Connections to equipment monitoring electromagnetic interference reactions of the vehicle may be accomplished by using fibre-optics or high-resistance leads. Other type of leads may be used but require extreme care to minimize interactions. The orientation, length and location of such leads shall be carefully documented to ensure repeatability of test results.

8 Test set-up (see Figure 3)

8.1 Vehicle placement

The vehicle shall be placed in the test region. The test region may contain a vehicle dynamometer, turntable or both these (see Figure 1).

8.2 Field generating device location (relative to vehicle and shielded enclosure)

8.2.1 General

The position or positions of the vehicle relative to the antenna or TLS shall be specified in the test plan (see 9.2).

The radiating elements of the field-generating device shall be no closer than 0,5 m to any absorbing material and no closer than 1,5 m to the wall of the shielded enclosure.

8.2.2 Antenna constraints

No part of the radiating antenna shall be closer than 0,5 m to the outer body surface of the vehicle.

The phase centre of the antenna shall be separated by at least 2 m horizontally from the reference point.

No part of an antenna's radiating elements shall be closer than 0,25 m to the floor.

There shall be no absorber material in the direct path between the transmitting antenna and the DUT.

8.2.3 TLS constraints

No part of a TLS, with the exception of the ground plane, shall be closer than 0,5 m to any part of the vehicle.

The TLS radiating element or elements shall be separated by at least 1 m vertically from the reference point (see 9.4.2).

The TLS shall extend centrally over at least 75 % of the length of the vehicle.

Particular care needs to be taken when testing heavy vehicles such as buses and large trucks. Under certain conditions related to dimensions and frequency, it is possible that close to 100 % of the applied power can be coupled to the vehicle by a directional coupler mechanism. Room resonances can also have a significant effect on the field uniformity, amplitude and direction under the TLS.