

---

---

**Agricultural tractors — Test  
procedures —**

Part 10:  
**Hydraulic power at tractor/implement  
interface**

**iTeh STANDARD PREVIEW**  
*Tracteurs agricoles — Modes opératoires d'essai —*  
*(standards.iteh.ai)* *Partie 10: Puissance hydraulique disponible à la liaison*  
*tracteur/instrument*

[ISO/OECD 789-10:2006](https://standards.iteh.ai/catalog/standards/sist/bd8df1cd-e219-4b67-93c8-27350dee1ed6/iso-oecd-789-10-2006)

<https://standards.iteh.ai/catalog/standards/sist/bd8df1cd-e219-4b67-93c8-27350dee1ed6/iso-oecd-789-10-2006>

**PDF disclaimer**

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[ISO/OECD 789-10:2006](https://standards.iteh.ai/catalog/standards/sist/bd8df1cd-e219-4b67-93c8-27350dee1ed6/iso-oecd-789-10-2006)

<https://standards.iteh.ai/catalog/standards/sist/bd8df1cd-e219-4b67-93c8-27350dee1ed6/iso-oecd-789-10-2006>

© ISO/OECD 2006

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO or OECD at the respective address below.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Editorial and Rights, OECD Publishing  
Rue André Pascal 2 • F-75775 Paris Cedex 16  
Tel. + 33 1 45 24 82 00  
Fax + 33 1 45 24 13 91  
E-mail [rights@oecd.org](mailto:rights@oecd.org)  
Web [www.oecd.org](http://www.oecd.org)

Published in Switzerland

# Contents

Page

Foreword.....	iv
<b>1 Scope .....</b>	<b>1</b>
<b>2 Normative references .....</b>	<b>1</b>
<b>3 Terms and definitions.....</b>	<b>1</b>
<b>4 Measurement units and tolerances.....</b>	<b>3</b>
<b>5 General requirements.....</b>	<b>3</b>
<b>5.1 Specification.....</b>	<b>3</b>
<b>5.2 Running-in and preliminary adjustments.....</b>	<b>3</b>
<b>6 Available hydraulic pressure test .....</b>	<b>4</b>
<b>6.1 Steady state.....</b>	<b>4</b>
<b>6.1.1 Test conditions .....</b>	<b>4</b>
<b>6.1.2 Test procedures .....</b>	<b>5</b>
<b>6.1.2.1 Flow through single coupler pair — Type 1 tests.....</b>	<b>5</b>
<b>6.1.2.2 Flow through single coupler pair — Type 2 tests.....</b>	<b>5</b>
<b>6.1.2.3 Flow into sump return port with coupler — Type 2 test.....</b>	<b>5</b>
<b>6.1.2.4 Flow into sump return port without coupler — Type 2 test.....</b>	<b>5</b>
<b>6.2 Peak pressure .....</b>	<b>5</b>
<b>6.2.1 Test conditions .....</b>	<b>5</b>
<b>6.2.2 Test procedure — Maximum flow selected — Type 2 test .....</b>	<b>5</b>
<b>6.3 Test report — Available hydraulic pressure .....</b>	<b>6</b>
<b>6.3.1 Type 1 tests.....</b>	<b>6</b>
<b>6.3.2 Type 2 tests.....</b>	<b>6</b>
<b>7 Available hydraulic power .....</b>	<b>7</b>
<b>7.1 Test conditions .....</b>	<b>7</b>
<b>7.2 Test procedures .....</b>	<b>7</b>
<b>7.2.1 Hydraulic power through single coupler pair — Types 1 and 2 tests.....</b>	<b>7</b>
<b>7.2.2 Maximum available hydraulic power using two or more coupler pairs simultaneously — Types 1 and 2 tests.....</b>	<b>8</b>
<b>7.3 Test report — Available hydraulic power .....</b>	<b>8</b>
<b>7.3.1 Maximum available hydraulic power — Type 1 tests.....</b>	<b>8</b>
<b>7.3.2 Maximum useable (continuous) available hydraulic power — Type 2 tests .....</b>	<b>8</b>
<b>Annex A (normative) Specimen test report .....</b>	<b>10</b>
<b>Bibliography .....</b>	<b>14</b>

## Foreword

**ISO (the International Organization for Standardization)** is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

ISO/OECD 789-10 was prepared by Technical Committee ISO/TC 23, *Tractors and machinery for agriculture and forestry*, Subcommittee SC 2, *Common tests*, in cooperation with the Organisation for Economic Cooperation and Development (OECD).

This first edition of ISO/OECD 789-10 cancels and replaces ISO 789-10:1996, which has been technically revised.

iTeh STANDARD PREVIEW

ISO 789 consists of the following parts, under the general title *Agricultural tractors — Test procedures*:

- *Part 1: Power tests for power take-off*
- *Part 2: Rear three-point linkage lifting capacity*
- *Part 3: Turning and clearance diameters*
- *Part 4: Measurement of exhaust smoke*
- *Part 5: Partial power PTO — Non-mechanically transmitted power*
- *Part 6: Centre of gravity*
- *Part 7: Axle power determination*
- *Part 8: Engine air cleaner*
- *Part 9: Power tests for drawbar*
- *Part 10: Hydraulic power at tractor/implement interface* [joint publication with OECD]
- *Part 11: Steering capability of wheeled tractors*
- *Part 12: Low temperature starting*

Rear three-point linkage lifting capacity is to form the subject of a future ISO/OECD 789-2.

## Foreword

**OECD (the Organisation for Economic Cooperation and Development)** is an intergovernmental reference for the certification and standardization of certain agricultural commodities. The work of the OECD in the area of standardization involves both member and non-member economies and focuses on the creation of common criteria in order to facilitate international trade. Participating countries are members of the OECD, the United Nations or the World Trade Organization.

The OECD Tractor Codes provide common performance criteria overseen by the OECD Committee for Agriculture. The Committee is one of the major OECD policy committees and is responsible for implementing the agricultural programme of work. The Codes and their amendments are subject to approval by the OECD Council. They relate to the following tests:

- tractor performance (Code 2);
- strength of protective structures for standard tractors (dynamic test) (Code 3);
- strength of protective structures for standard tractors (static test) (Code 4);
- noise measurement at the driver's position(s) (Code 5);
- strength of front-mounted roll-over protective structures on narrow-track wheeled agricultural and forestry tractors (Code 6);
- strength of rear-mounted roll-over protective structures on narrow-track wheeled agricultural and forestry tractors (Code 7);
- strength of protective structures on track-laying tractors (Code 8);
- strength of protective structures on telehandlers (Code 9).

The OECD Tractor Codes are made available to those countries which are OECD Members, as well as to other countries. To date, 29 countries adhere to the Codes, including three non-OECD Members, China, India and the Russian Federation. Each National Authority designated for implementing the Codes may perform tractor tests according to the common harmonized testing procedures and then submit results to OECD for approval.

Cooperative agreements are established between OECD and certain institutions, such as ISO and the European Community, with the objective of avoiding contradictory requirements. The European Commission participates in the work of the OECD and is represented on the OECD Council (without the right of veto).

A Memorandum of Understanding (MoU) has been signed by ISO and OECD in connection with the TC 23/SC 2 programme of work on tractors.

The OECD test codes are published in French (F) and English (E), and are subject to periodic revision for dealing with the technical progress of agricultural and forestry tractors.

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[ISO/OECD 789-10:2006](#)

<https://standards.iteh.ai/catalog/standards/sist/bd8df1cd-e219-4b67-93c8-27350dee1ed6/iso-oecd-789-10-2006>

# Agricultural tractors — Test procedures —

## Part 10:

# Hydraulic power at tractor/implement interface

## 1 Scope

ISO/OECD 789-10 specifies tests for determining the hydraulic pressure at the external hydraulic service of an agricultural tractor/implement as specified in ISO 10448, as well as companion tests for measuring the maximum hydraulic power available.

## 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 730-1:1994, *Agricultural wheeled tractors — Rear-mounted three-point linkage — Part 1: Categories 1, 2, 3 and 4*

ISO 3448:1992, *Industrial liquid lubricants — ISO viscosity classification*

ISO 5675:1992, *Agricultural tractors and machinery — General purpose quick-action hydraulic couplers*

ISO 6149-1:2006, *Connections for hydraulic fluid power and general use — Ports and stud ends with ISO 261 metric threads and O-ring sealing — Part 1: Ports with truncated housing for O-ring seal*

ISO 6149-2:2006, *Connections for hydraulic fluid power and general use — Ports and stud ends with ISO 261 metric threads and O-ring sealing — Part 2: Dimensions, design, test methods and requirements for heavy-duty (S series) stud ends*

ISO 6149-3:2006, *Connections for hydraulic fluid power and general use — Ports and stud ends with ISO 261 metric threads and O-ring sealing — Part 3: Dimensions, design, test methods and requirements for light-duty (L series) stud ends*

ISO 10448:1994, *Agricultural tractors — Hydraulic pressure for implements*

## 3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

### 3.1

#### **agricultural tractor**

self-propelled machine, either wheeled and having at least two axles or track-laying, particularly designed to pull, push, carry and operate implements used for agricultural work (including forestry work)

NOTE It may be provided with a detachable loading platform.

- 3.2  
maximum engine speed**  
engine speed at which the throttle control is at the maximum setting
- 3.3  
rated engine speed**  
engine speed specified by the tractor manufacturer for continuous operation at full load
- 3.4  
external hydraulic service**  
source of hydraulic power, derived from the hydraulic system of the agricultural tractor, available for use on an implement mounted on, coupled to or otherwise used in conjunction with it
- [ISO 10448:1994]
- 3.5  
coupler pair**  
pair of female hydraulic couplers compatible with male couplers as specified in ISO 5675, mounted on agricultural tractors and connected to the hydraulic system to allow flow from one coupler to the other
- [ISO 10448:1994]
- 3.6  
available differential pressure**  
steady state difference of the hydraulic pressure between two male coupler parts on the implement side
- [ISO 10448:1994]
- 3.7  
maximum pressure**  
maximum steady state hydraulic pressure at either male coupler connected to a coupler pair
- [ISO 10448:1994]
- 3.8  
maximum loop return pressure**  
maximum steady hydraulic pressure at the male coupler returning flow to a hydraulic system that can reverse the flow through that coupler
- [ISO 10448:1994]
- 3.9  
maximum sump return pressure with coupler**  
maximum steady state hydraulic pressure at the male coupler returning flow directly to the reservoir
- [ISO 10448:1994]
- 3.10  
maximum sump return pressure without coupler**  
maximum steady state hydraulic pressure at an M22 × 1,5 or M27 × 2 thread size port in accordance with ISO 6149-1, ISO 6149-2 or ISO 6149-3, returning flow directly to the reservoir
- [ISO 10448:1994]
- 3.11  
rated maximum hydraulic pressure**  
maximum pressure as specified by the tractor manufacturer for continuous use

iTeh STANDARD PREVIEW  
(standards.iteh.ai)

ISO/OECD 789-10:2006  
<https://standards.iteh.ai/catalog/standards/sist/bd8d11cd-e219-4bb7-95c8-27350dee1ed6/iso-oecd-789-10-2006>



**3.12****maximum hydraulic power**

hydraulic power calculation based on the measured flow and available coupler outlet pressure (the pressure near the coupler where oil is exiting from the tractor)

NOTE The calculation does not take into account return pressure losses.

**3.13****maximum useable (continuous) hydraulic power**

hydraulic power calculation based on the measured flow and available differential pressure (the pressure near the coupler where oil is exiting from the tractor minus the pressure near the coupler where oil is re-entering the tractor)

NOTE The calculation takes into account the return pressure losses and defines the useable hydraulic power available.

**3.14****peak pressure**

maximum instantaneous hydraulic pressure at either male coupler connected to a coupler pair

[ISO 10448:1994]

**4 Measurement units and tolerances**

The following units and tolerances apply to the maximum value measured:

- a) rotational frequency, in revolutions per minute (r/min):  $\pm 0,5\%$ ;
- b) time, in seconds (s):  $\pm 0,2$  s;
- c) temperature, in degrees Celsius:  $\pm 2$  °C (applicable to actual readings);
- d) pressure, in megapascals (MPa):  $\pm 2$  %;
- e) flow, in litres per minute (l/min):  $\pm 2$  %.

**5 General requirements****5.1 Specification**

The tractor tested shall have its identification specification given in the test report (see Annex A) and shall be used in accordance with the manufacturer's recommendations for normal operation.

**5.2 Running-in and preliminary adjustments**

**5.2.1** The tractor shall be run-in prior to the test.

**5.2.2** The hydraulic fluid shall be as recommended by the manufacturer and identified by type and viscosity in accordance with ISO 3448.

**5.2.3** For the Type 1 tests listed in Annex A (OECD Code 2 compulsory tests), the throttle or governor control lever shall be adjusted to the maximum engine speed. The engine speed is continuously recorded during the tests.

**5.2.4** For the Type 2 tests listed in Annex A (OECD Code 2 supplementary tests), the engine speed condition may be either rated or maximum engine speed and is at the discretion of the manufacturer. For tests

conducted at rated engine speed, the throttle or governor control lever shall be adjusted to maintain the rated engine speed within the tolerance limits as specified in Clause 4 a). For tests conducted at the maximum engine speed, the engine speed is continuously recorded during the tests.

**5.2.5** At the start of each test, the temperature of the hydraulic fluid in the tractor hydraulic reservoir shall be at  $65\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$ , and shall be recorded. If this cannot be achieved owing to the presence of an oil cooler or other system component, the temperature measured during the test shall be stated in the test report.

**5.2.6** All tractor-mounted flow controls shall be adjusted to obtain maximum flow.


## 6 Available hydraulic pressure test

### 6.1 Steady state

#### 6.1.1 Test conditions

The test conditions for determining maximum pressure, minimum available differential pressure, maximum loop return pressure, and sump return pressure, are as follows.

- a) A test assembly shall be looped between a coupler pair. The test assembly (see Figure 1) shall consist of a minimum 10 mm inside diameter hose test assembly with male couplers conforming to ISO 5675, size 12,5, at each end and including two pressure gauges located respectively immediately next to each coupler, a flow meter and an adjustable restrictor valve used to vary the hydraulic load. When only Type 1 tests are conducted (see Annex A), the pressure gauge at the return coupler side is not required. Coupler size may vary with tractor flow class.
- b) When determining the maximum sump return pressure with coupler, one end of the test assembly shall be connected to a coupler that is connected directly to the tractor reservoir or to the sump return port as specified by the manufacturer, and the other end shall be connected to one half of a coupler pair.
- c) When determining the maximum sump return pressure without coupler, the test assembly shall be changed by removing the coupler from the sump return end and replacing it with suitable adapters to connect directly to the sump return port.

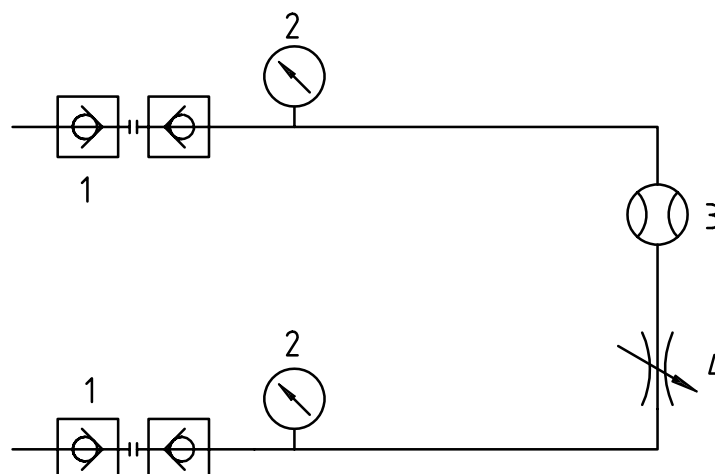

**Key**

- 1 tractor coupler pair
- 2 pressure gauge
- 3 flow meter
- 4 adjustable restrictor valve

**Figure 1 — Steady state test assembly**

## 6.1.2 Test procedures

### 6.1.2.1 Flow through single coupler pair — Type 1 tests

Actuate the tractor external hydraulic service to route oil through the test assembly. Record the pressure near the coupler where oil is exiting from the tractor, oil flow, engine speed, and reservoir oil temperature.

Close the adjustable restrictor valve. Record the pressure near the coupler where oil is exiting from the tractor to determine the maximum pressure.

### 6.1.2.2 Flow through single coupler pair — Type 2 tests

Actuate the tractor external hydraulic service to route oil through the test assembly. Record the pressure near the coupler where oil is exiting from the tractor, the pressure near the coupler where oil is re-entering the tractor, oil flow, engine speed and reservoir oil temperature. Maximum loop return pressure is in this case the pressure near the coupler where oil is entering the tractor.

Adjust the adjustable restrictor valve or engine speed to produce the standard flow of 30 l/min for category 1 tractors and 50 l/min for category 2 or 3 tractors, as specified in ISO 730-1. Record the pressure near the coupler where oil is exiting from the tractor, the pressure near the coupler where oil is re-entering the tractor, oil flow, engine speed and reservoir oil temperature. Calculate the available differential pressure by subtracting the pressure of oil re-entering the tractor from the pressure of oil exiting the tractor.

### 6.1.2.3 Flow into sump return port with coupler — Type 2 test

Actuate the tractor external hydraulic service to route oil through the test assembly. Adjust the adjustable restrictor valve or engine speed to produce the standard flow of 30 l/min for category 1 tractors, or 50 l/min for category 2 or 3 tractors, as specified in ISO 730-1. Record the pressure near the coupler where oil is exiting from the tractor, the pressure near the coupler where oil is re-entering the tractor, oil flow, engine speed and reservoir oil temperature.

<https://standards.itech.ai/catalog/standards/sist/bd8df1cd-e219-4b67-93c8-27350dee1ed6/iso-oecd-789-10-2006>

### 6.1.2.4 Flow into sump return port without coupler — Type 2 test

Actuate the tractor external hydraulic service to route oil through the test assembly. Adjust the adjustable restrictor valve or engine speed to produce the standard flow of 30 l/min for category 1 tractors, or 50 l/min for category 2 or 3 tractors, as specified in ISO 730-1. Record the pressure near the coupler where oil is exiting from the tractor, the pressure near the coupler where oil is re-entering the tractor, oil flow, engine speed and reservoir oil temperature.

## 6.2 Peak pressure

### 6.2.1 Test conditions

The peak pressure shall be determined using a test assembly looped between a coupler pair (see Figure 2). The test assembly shall consist of a double-acting cylinder without cushion, and a pair of 2 500 mm ± 100 mm long sections of nominal 10 mm inside diameter hydraulic hose with male couplers conforming to ISO 5675, size 12,5 at each end. The cylinder dimensions shall be 80 mm ± 5 mm bore, 30 mm ± 5 mm rod and 200 mm ± 10 mm stroke. A pressure transducer and recording equipment capable of indicating a pressure rise rate of 700 MPa/s shall be connected within 100 mm of each male coupler connecting the hydraulic cylinder to the tractor.

### 6.2.2 Test procedure — Maximum flow selected — Type 2 test

Actuate the tractor external hydraulic service to extend and retract the cylinder fully a total of 15 complete cycles. Record the maximum pressure observed during the cylinder extended portion of 15 cycles of cylinder movement as “peak pressure”.